



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6366 HE

SPECfp®2006 = 43.2

SPECfp\_base2006 = 36.0

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

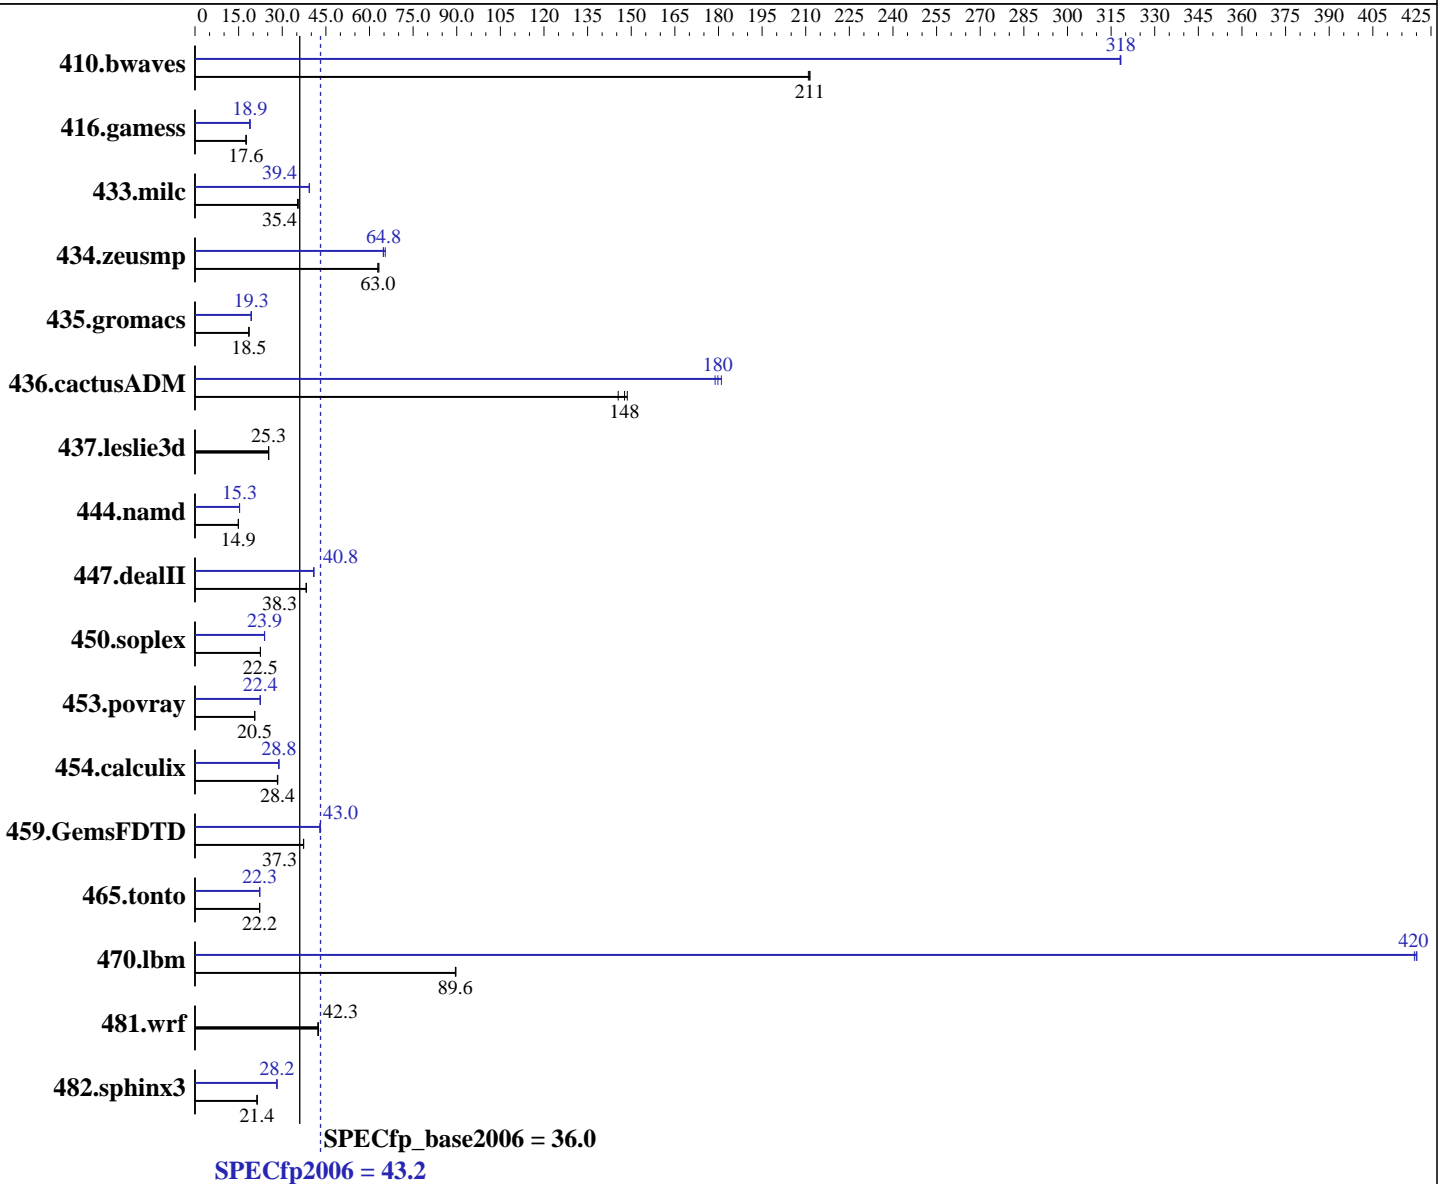

### Hardware

CPU Name: AMD Opteron 6366 HE  
 CPU Characteristics: AMD Turbo CORE technology up to 3.10 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
 CPU(s) orderable: 1,2 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3,  
Kernel 2.6.32-279.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64  
Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6366 HE

SPECfp2006 = 43.2

SPECfp\_base2006 = 36.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 320 GB SATA, 7200 RPM

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64.4	211	<b>64.3</b>	<b>211</b>	64.3	211	42.7	318	42.7	318	<b>42.7</b>	<b>318</b>
416.gamess	1113	17.6	1115	17.6	<b>1113</b>	<b>17.6</b>	1039	18.8	1032	19.0	<b>1038</b>	<b>18.9</b>
433.milc	259	35.5	261	35.2	<b>259</b>	<b>35.4</b>	234	39.2	233	39.4	<b>233</b>	<b>39.4</b>
434.zeusmp	145	62.9	<b>145</b>	<b>63.0</b>	144	63.2	139	65.4	<b>140</b>	<b>64.8</b>	141	64.7
435.gromacs	<b>385</b>	<b>18.5</b>	385	18.6	385	18.5	<b>369</b>	<b>19.3</b>	369	19.3	369	19.3
436.cactusADM	80.4	149	82.1	146	<b>80.9</b>	<b>148</b>	<b>66.5</b>	<b>180</b>	66.8	179	66.0	181
437.leslie3d	371	25.4	372	25.3	<b>371</b>	<b>25.3</b>	371	25.4	372	25.3	<b>371</b>	<b>25.3</b>
444.namd	537	14.9	<b>538</b>	<b>14.9</b>	538	14.9	524	15.3	<b>524</b>	<b>15.3</b>	523	15.3
447.dealII	299	38.3	299	38.3	<b>299</b>	<b>38.3</b>	280	40.9	<b>280</b>	<b>40.8</b>	280	40.8
450.soplex	371	22.5	371	22.5	<b>371</b>	<b>22.5</b>	<b>349</b>	<b>23.9</b>	349	23.9	348	23.9
453.povray	260	20.5	<b>259</b>	<b>20.5</b>	259	20.5	237	22.5	237	22.4	<b>237</b>	<b>22.4</b>
454.calculix	291	28.3	290	28.4	<b>290</b>	<b>28.4</b>	<b>286</b>	<b>28.8</b>	286	28.8	286	28.8
459.GemsFDTD	<b>284</b>	<b>37.3</b>	284	37.4	284	37.3	246	43.1	<b>247</b>	<b>43.0</b>	247	43.0
465.tonto	443	22.2	443	22.2	<b>443</b>	<b>22.2</b>	<b>442</b>	<b>22.3</b>	443	22.2	442	22.3
470.lbm	153	89.7	<b>153</b>	<b>89.6</b>	153	89.5	32.8	419	32.7	420	<b>32.7</b>	<b>420</b>
481.wrf	263	42.4	264	42.3	<b>264</b>	<b>42.3</b>	263	42.4	264	42.3	<b>264</b>	<b>42.3</b>
482.sphinx3	913	21.4	913	21.4	<b>913</b>	<b>21.4</b>	691	28.2	<b>692</b>	<b>28.2</b>	692	28.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6366 HE

SPECfp2006 = 43.2

SPECfp\_base2006 = 36.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

## Operating System Notes (Continued)

cpuspeed stop was used to set the CPU frequency to its maximum.

```
Set vm/nr_hugepages=4000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "4000"
```

```
LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1104-speed-libs-revA/32:/root/work/cpu2006v1.2/amd1104-speed-libs-revA/64"
```

```
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31"
```

```
O64_OMP_SPIN_COUNT = "800000"
```

```
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6220 chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
```

```
416.gamess: -DSPEC_CPU_LP64
```

```
433.milc: -DSPEC_CPU_LP64
```

```
434.zeusmp: -DSPEC_CPU_LP64
```

```
435.gromacs: -DSPEC_CPU_LP64
```

```
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
```

```
437.leslie3d: -DSPEC_CPU_LP64
```

```
444.namd: -DSPEC_CPU_LP64
```

```
447.dealII: -DSPEC_CPU_LP64
```

```
450.soplex: -DSPEC_CPU_LP64
```

```
453.povray: -DSPEC_CPU_LP64
```

Continued on next page

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 3



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6366 HE

SPECfp2006 = 43.2

SPECfp\_base2006 = 36.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

## Base Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
           -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

### C benchmarks:

-march=bdver1 -Ofast -HP:bdt=2m:heap=2m -apo -mso  
 -OPT:alias=restricted -OPT:malloc\_alg=2 -LNO:parallel\_overhead=10000

### C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load\_exe=0 -CG:p2align=0  
 -INLINE:aggressive=on -HP:bdt=2m:heap=2m -D\_\_OPEN64\_FAST\_SET

### Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -LNO:fusion\_peeling\_limit=0  
 -LNO:parallel\_overhead=10000 -OPT:rsqrt=2 -OPT:unroll\_size=256  
 -HP:bdt=2m:heap=2m -apo

### Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -HP:bdt=2m:heap=2m -apo -mso  
 -OPT:alias=restricted -OPT:malloc\_alg=2 -LNO:parallel\_overhead=10000  
 -LNO:blocking=off -LNO:fusion\_peeling\_limit=0 -OPT:rsqrt=2  
 -OPT:unroll\_size=256

## Peak Compiler Invocation

### C benchmarks:

opencc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

opencc openf95



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6366 HE

SPECfp2006 = 43.2

SPECfp\_base2006 = 36.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

### C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive

470.lbm: -march=bdver1 -Ofast -mso -apo -CG:sse_cse_regs=0
-LNO:prefetch_ahead=4 -CG:locs_shallow_depth=1
-CG:cmp_peep=on -CG:compute_to=on -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:local_sched_alg=2 -CG:use_incdec=off
-INLINE:aggressive=on -WOPT:sib=on -HP

```

### C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -LNO:simd=0 -D__OPEN64_FAST_SET
-static -INLINE:aggressive=on -OPT:alias=disjoint
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6366 HE

SPECfp2006 = 43.2

SPECfp\_base2006 = 36.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

## Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -fno-exceptions -CG:p2align=0  
-m32 -HP:bdt=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:pre\_local\_sched=off  
-INLINE:aggressive=on -HP:bdt=2m:heap=2m -OPT:transform=2  
-OPT:alias=disjoint -WOPT:aggcm=0

### Fortran benchmarks:

410.bwaves: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -apo -OPT:Ofast  
-OPT:treeheight=on -LNO:blocking=off -LNO:prefetch=2  
-LNO:pf2=0 -LNO:prefetch\_ahead=3 -LNO:ignore\_feedback=off  
-LNO:fu=4 -LNO:loop\_model\_simd=on  
-LNO:simd\_rm\_unity\_remainder=on -WOPT:aggstr=0  
-HP:bdt=2m:heap=2m -CG:cmp\_peep=on -CG:p2align=0

416.gamess: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -CG:local\_sched\_alg=1  
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -apo -LNO:blocking=off  
-LNO:interchange=off -LNO:fusion\_peeling\_limit=0  
-OPT:treeheight=on -OPT:unroll\_size=256 -CG:cmp\_peep=on  
-CG:compute\_to=on -GRA:prioritize\_by\_density=on  
-HP:bdt=2m:heap=2m

437.leslie3d: basepeak = yes

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll\_size=0 -LNO:fission=2  
-CG:load\_exe=0 -CG:local\_sched\_alg=2 -HP -apo

465.tonto: -march=bdver1 -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -CG:local\_sched\_alg=1  
-IPA:plimit=525 -HP

### Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2  
-HP:bdt=2m:heap=2m

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6366 HE

SPECfp2006 = 43.2

SPECfp\_base2006 = 36.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

## Peak Optimization Flags (Continued)

436.cactusADM: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off  
-LNO:prefetch=2 -HP:bdt=2m:heap=2m -CG:locs\_shallow\_depth=1  
-CG:load\_exe=0 -WOPT:sib=on -apo

454.calculix: -march=bdver1 -Ofast -OPT:unroll\_size=256  
-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:00:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 January 2013.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 7