



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>2006 = **52.7**

## Tecal RH5885 V2 (Intel Xeon E7-4820)

SPECfp\_base2006 = **50.9**

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2013

Hardware Availability: Oct-2012

Software Availability: Oct-2012

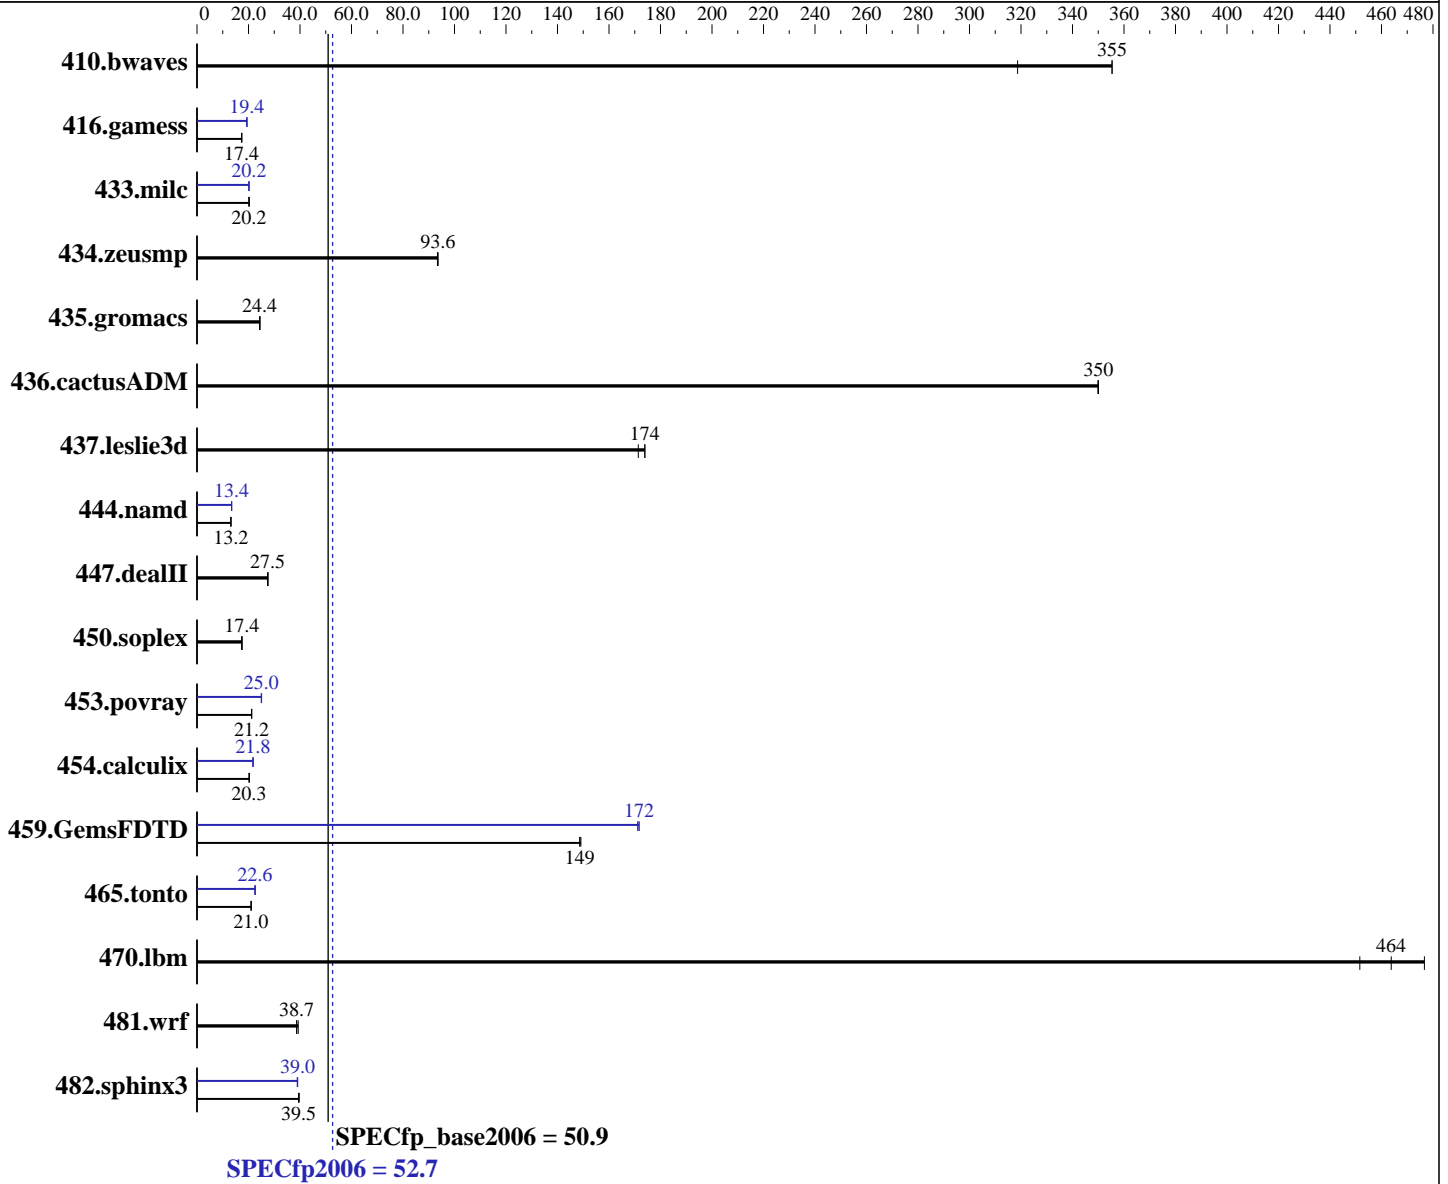

### Hardware

CPU Name: Intel Xeon E7-4820  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.27 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 13.0.0.079 of Intel C++ Studio XE for Linux;  
 Fortran: Version 13.0.0.079 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp2006 = **52.7**

## Tecal RH5885 V2 (Intel Xeon E7-4820)

SPECfp\_base2006 = **50.9**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2013

Hardware Availability: Oct-2012

Software Availability: Oct-2012

L3 Cache: 18 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1 TB (64 x 16 GB 4Rx4 PC3-10600R-9, ECC, running at 978 MHz)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	42.6	319	<b>38.2</b>	<b>355</b>	38.2	355	42.6	319	<b>38.2</b>	<b>355</b>	38.2	355
416.gamess	1127	17.4	<b>1127</b>	<b>17.4</b>	1128	17.4	<b>1011</b>	<b>19.4</b>	1011	19.4	1010	19.4
433.milc	<b>453</b>	<b>20.2</b>	456	20.1	453	20.3	454	20.2	456	20.2	<b>455</b>	<b>20.2</b>
434.zeusmp	97.3	93.6	<b>97.3</b>	<b>93.6</b>	97.5	93.4	97.3	93.6	<b>97.3</b>	<b>93.6</b>	97.5	93.4
435.gromacs	292	24.4	<b>293</b>	<b>24.4</b>	294	24.3	292	24.4	<b>293</b>	<b>24.4</b>	294	24.3
436.cactusADM	34.1	350	34.2	350	<b>34.1</b>	<b>350</b>	34.1	350	34.2	350	<b>34.1</b>	<b>350</b>
437.leslie3d	54.8	171	<b>54.0</b>	<b>174</b>	54.0	174	54.8	171	<b>54.0</b>	<b>174</b>	54.0	174
444.namd	<b>609</b>	<b>13.2</b>	609	13.2	609	13.2	596	13.5	596	13.4	<b>596</b>	<b>13.4</b>
447.dealII	<b>416</b>	<b>27.5</b>	416	27.5	415	27.6	<b>416</b>	<b>27.5</b>	416	27.5	415	27.6
450.soplex	476	17.5	<b>479</b>	<b>17.4</b>	480	17.4	476	17.5	<b>479</b>	<b>17.4</b>	480	17.4
453.povray	<b>251</b>	<b>21.2</b>	250	21.2	251	21.2	212	25.1	<b>213</b>	<b>25.0</b>	213	25.0
454.calculix	405	20.4	408	20.2	<b>407</b>	<b>20.3</b>	379	21.8	379	21.7	<b>379</b>	<b>21.8</b>
459.GemsFDTD	<b>71.4</b>	<b>149</b>	71.2	149	71.4	149	<b>61.8</b>	<b>172</b>	61.8	172	62.0	171
465.tonto	<b>468</b>	<b>21.0</b>	467	21.0	468	21.0	<b>436</b>	<b>22.6</b>	435	22.6	437	22.5
470.lbm	<b>29.6</b>	<b>464</b>	28.8	477	30.4	452	<b>29.6</b>	<b>464</b>	28.8	477	30.4	452
481.wrf	284	39.3	289	38.7	<b>289</b>	<b>38.7</b>	284	39.3	289	38.7	<b>289</b>	<b>38.7</b>
482.sphinx3	494	39.4	<b>493</b>	<b>39.5</b>	491	39.7	501	38.9	498	39.1	<b>499</b>	<b>39.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Intel Hyper-Threading set to Disabled  
 Power Technology set to Custom, Performance/Watt set to Traditional  
 Sysinfo program /home/cpu2006/config/sysinfo.rev6818  
 \$Rev: 6818 \$ \$Date:: 2012-07-17 # \$ 5569a0425e2ad530534e4c79a46e4d28  
 running on RH5885-24 Thu Jan 31 06:53:10 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 52.7

Tecal RH5885 V2 (Intel Xeon E7-4820)

SPECfp\_base2006 = 50.9

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2013

Hardware Availability: Oct-2012

Software Availability: Oct-2012

## Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7- 4820 @ 2.00GHz

4 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 8

physical 0: cores 0 1 2 8 17 18 24 25

physical 1: cores 0 1 2 8 17 18 24 25

physical 2: cores 0 1 2 8 17 18 24 25

physical 3: cores 0 1 2 8 17 18 24 25

cache size : 18432 KB

From /proc/meminfo

MemTotal: 1058809572 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/\*release\* /etc/\*version\*

redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:

Linux RH5885-24 2.6.32-220.el6.x86\_64 #1 SMP Wed Nov 9 08:03:13 EST 2011

x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Jan 30 20:35

SPEC is set to: /home/cpu2006

Filesystem Type Size Used Avail Use% Mounted on

/dev/mapper/vg\_rh588524-lv\_home

ext4 409G 137G 252G 36% /home

Additional information from dmidecode:

BIOS American Megatrends Inc. RGPUC-BIOS-V023 12/17/2012

Memory:

64x 16 GB

64x Hyundai HMT42GR7BMR4C-H9 16 GB 978 MHz 4 rank

(End of data from sysinfo program)

Descriptions about memory generated by sysinfo are not correct, only 64 DIMMs are installed not 128, see descriptions below.

Memory:

64x Hyundai HMT42GR7BMR4C-H9 16 GB 978 MHz 4 rank



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

<b>Huawei</b>	<b>SPECfp2006 =</b>	<b>52.7</b>
<b>Tecal RH5885 V2 (Intel Xeon E7-4820)</b>	<b>SPECfp_base2006 =</b>	<b>50.9</b>

<b>CPU2006 license:</b> 3175	<b>Test date:</b> Jan-2013
<b>Test sponsor:</b> Huawei	<b>Hardware Availability:</b> Oct-2012
<b>Tested by:</b> Huawei	<b>Software Availability:</b> Oct-2012

## General Notes

Environment variables set by runspec before the start of the run:  
 KMP\_AFFINITY = "granularity=fine,compact,1,0"  
 LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"  
 OMP\_NUM\_THREADS = "32"

Binaries compiled on a system with 4x Xeon E7-8870 CPU + 1024GB memory using RHEL6.2  
 Transparent Huge Pages enabled with:  
 echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
 runspec command invoked through numactl i.e.:  
 numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
 icc -m64

C++ benchmarks:  
 icpc -m64

Fortran benchmarks:  
 ifort -m64

Benchmarks using both Fortran and C:  
 icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 52.7

Tecal RH5885 V2 (Intel Xeon E7-4820)

SPECfp\_base2006 = 50.9

CPU2006 license: 3175

Test date: Jan-2013

Test sponsor: Huawei

Hardware Availability: Oct-2012

Tested by: Huawei

Software Availability: Oct-2012

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 52.7

Tecal RH5885 V2 (Intel Xeon E7-4820)

SPECfp\_base2006 = 50.9

CPU2006 license: 3175

Test date: Jan-2013

Test sponsor: Huawei

Hardware Availability: Oct-2012

Tested by: Huawei

Software Availability: Oct-2012

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revG.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 = 52.7
Tecal RH5885 V2 (Intel Xeon E7-4820)	SPECfp_base2006 = 50.9

**CPU2006 license:** 3175  
**Test sponsor:** Huawei  
**Tested by:** Huawei

**Test date:** Jan-2013  
**Hardware Availability:** Oct-2012  
**Software Availability:** Oct-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
 For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
 Report generated on Thu Jul 24 15:12:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
 Originally published on 26 February 2013.