



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX100 S8, Intel Xeon E3-1230L v3, 1.80 GHz

SPECint®2006 = 47.0

SPECint\_base2006 = 45.3

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

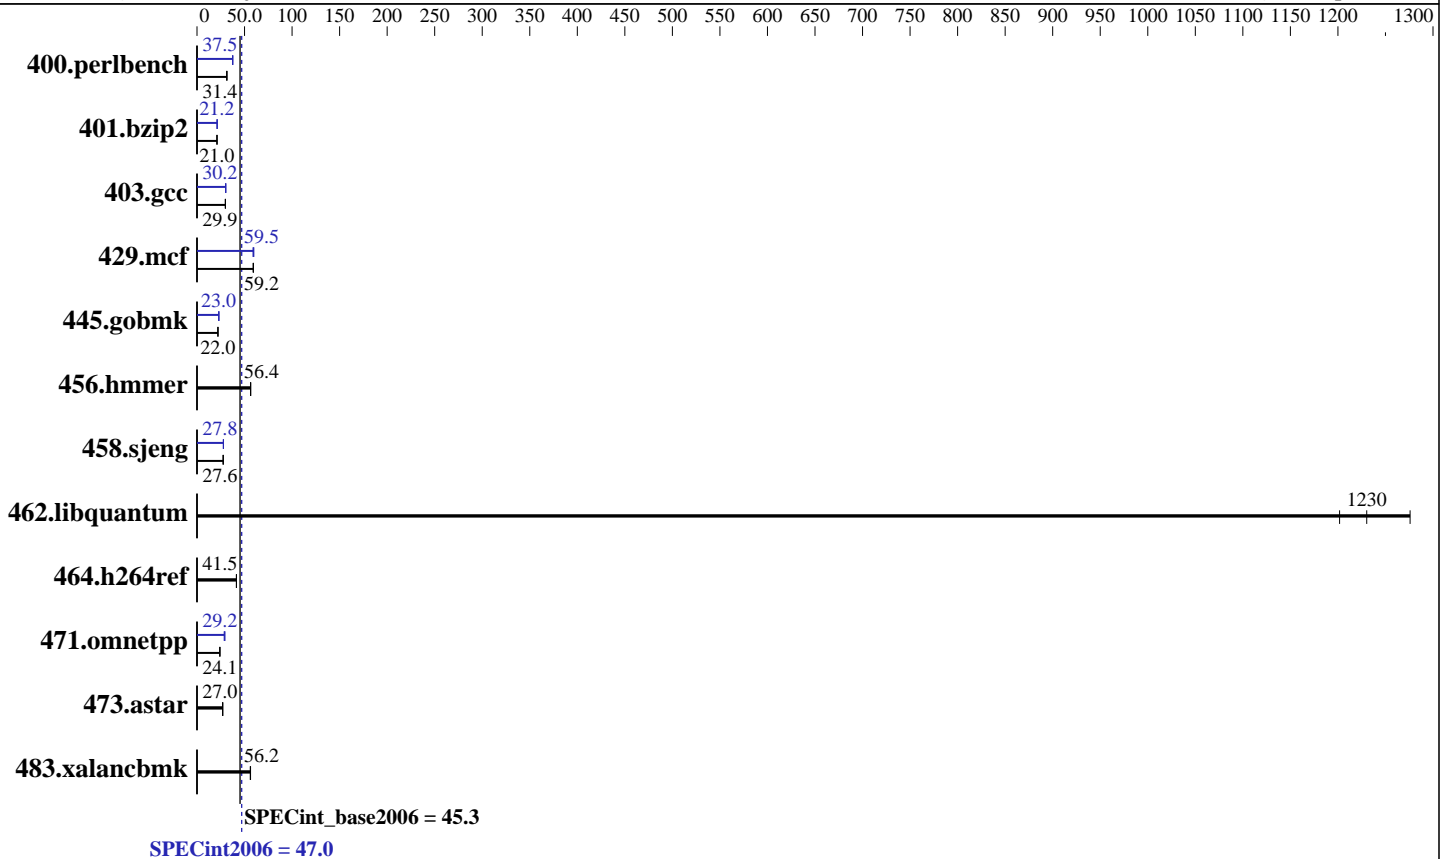

### Hardware

CPU Name: Intel Xeon E3-1230L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (4 x 8 GB 2Rx8 PC3L-12800E-11, ECC)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.11.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX100 S8, Intel Xeon E3-1230L v3, 1.80 GHz

SPECint2006 = 47.0

SPECint\_base2006 = 45.3

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Sep-2013  
Hardware Availability: Sep-2013  
Software Availability: Sep-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b><u>311</u></b>	<b><u>31.4</u></b>	311	31.4	311	31.4	<b><u>260</u></b>	<b><u>37.5</u></b>	260	37.5	260	37.6
401.bzip2	<b><u>459</u></b>	<b><u>21.0</u></b>	459	21.0	459	21.0	<b><u>455</u></b>	<b><u>21.2</u></b>	456	21.2	455	21.2
403.gcc	269	29.9	<b><u>269</u></b>	<b><u>29.9</u></b>	270	29.8	<b><u>266</u></b>	<b><u>30.2</u></b>	266	30.2	267	30.2
429.mcf	154	59.4	154	59.1	<b><u>154</u></b>	<b><u>59.2</u></b>	153	59.7	<b><u>153</u></b>	<b><u>59.5</u></b>	155	58.9
445.gobmk	<b><u>476</u></b>	<b><u>22.0</u></b>	476	22.0	477	22.0	<b><u>457</u></b>	<b><u>23.0</u></b>	457	22.9	457	23.0
456.hammer	165	56.5	166	56.3	<b><u>166</u></b>	<b><u>56.4</u></b>	165	56.5	166	56.3	<b><u>166</u></b>	<b><u>56.4</u></b>
458.sjeng	439	27.5	<b><u>439</u></b>	<b><u>27.6</u></b>	438	27.6	435	27.8	<b><u>435</u></b>	<b><u>27.8</u></b>	436	27.7
462.libquantum	17.2	1200	16.2	1280	<b><u>16.8</u></b>	<b><u>1230</u></b>	17.2	1200	16.2	1280	<b><u>16.8</u></b>	<b><u>1230</u></b>
464.h264ref	534	41.5	533	41.5	<b><u>533</u></b>	<b><u>41.5</u></b>	534	41.5	533	41.5	<b><u>533</u></b>	<b><u>41.5</u></b>
471.omnetpp	259	24.1	<b><u>260</u></b>	<b><u>24.1</u></b>	261	24.0	214	29.2	219	28.6	<b><u>214</u></b>	<b><u>29.2</u></b>
473.astar	261	26.9	<b><u>260</u></b>	<b><u>27.0</u></b>	258	27.2	261	26.9	<b><u>260</u></b>	<b><u>27.0</u></b>	258	27.2
483.xalancbmk	123	56.3	<b><u>123</u></b>	<b><u>56.2</u></b>	123	56.1	123	56.3	<b><u>123</u></b>	<b><u>56.2</u></b>	123	56.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX100 S8, Intel Xeon E3-1230L v3, 1.80 GHz

SPECint2006 = 47.0

SPECint\_base2006 = 45.3

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Sep-2013  
Hardware Availability: Sep-2013  
Software Availability: Sep-2013

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32  
C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64  
400.perlbench: icc -m32  
445.gobmk: icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX100 S8, Intel Xeon E3-1230L v3, 1.80 GHz

**SPECint2006 = 47.0**

**SPECint\_base2006 = 45.3**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Sep-2013  
**Hardware Availability:** Sep-2013  
**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):  
icpc -m64

471.omnetpp: icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias  
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias  
403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32  
429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel  
-opt-prefetch -auto-p32  
445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias  
456.hmmer: basepeak = yes  
458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX100 S8, Intel Xeon E3-1230L v3, 1.80 GHz

**SPECint2006 = 47.0**

**SPECint\_base2006 = 45.3**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Sep-2013  
**Hardware Availability:** Sep-2013  
**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 17:50:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 November 2013.