



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®2006 = **75.5**

Express5800/E120e-M (Intel Xeon E5-2430L v2)

SPECfp_base2006 = **72.8**

CPU2006 license: 9006


Test date: Mar-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Oct-2013

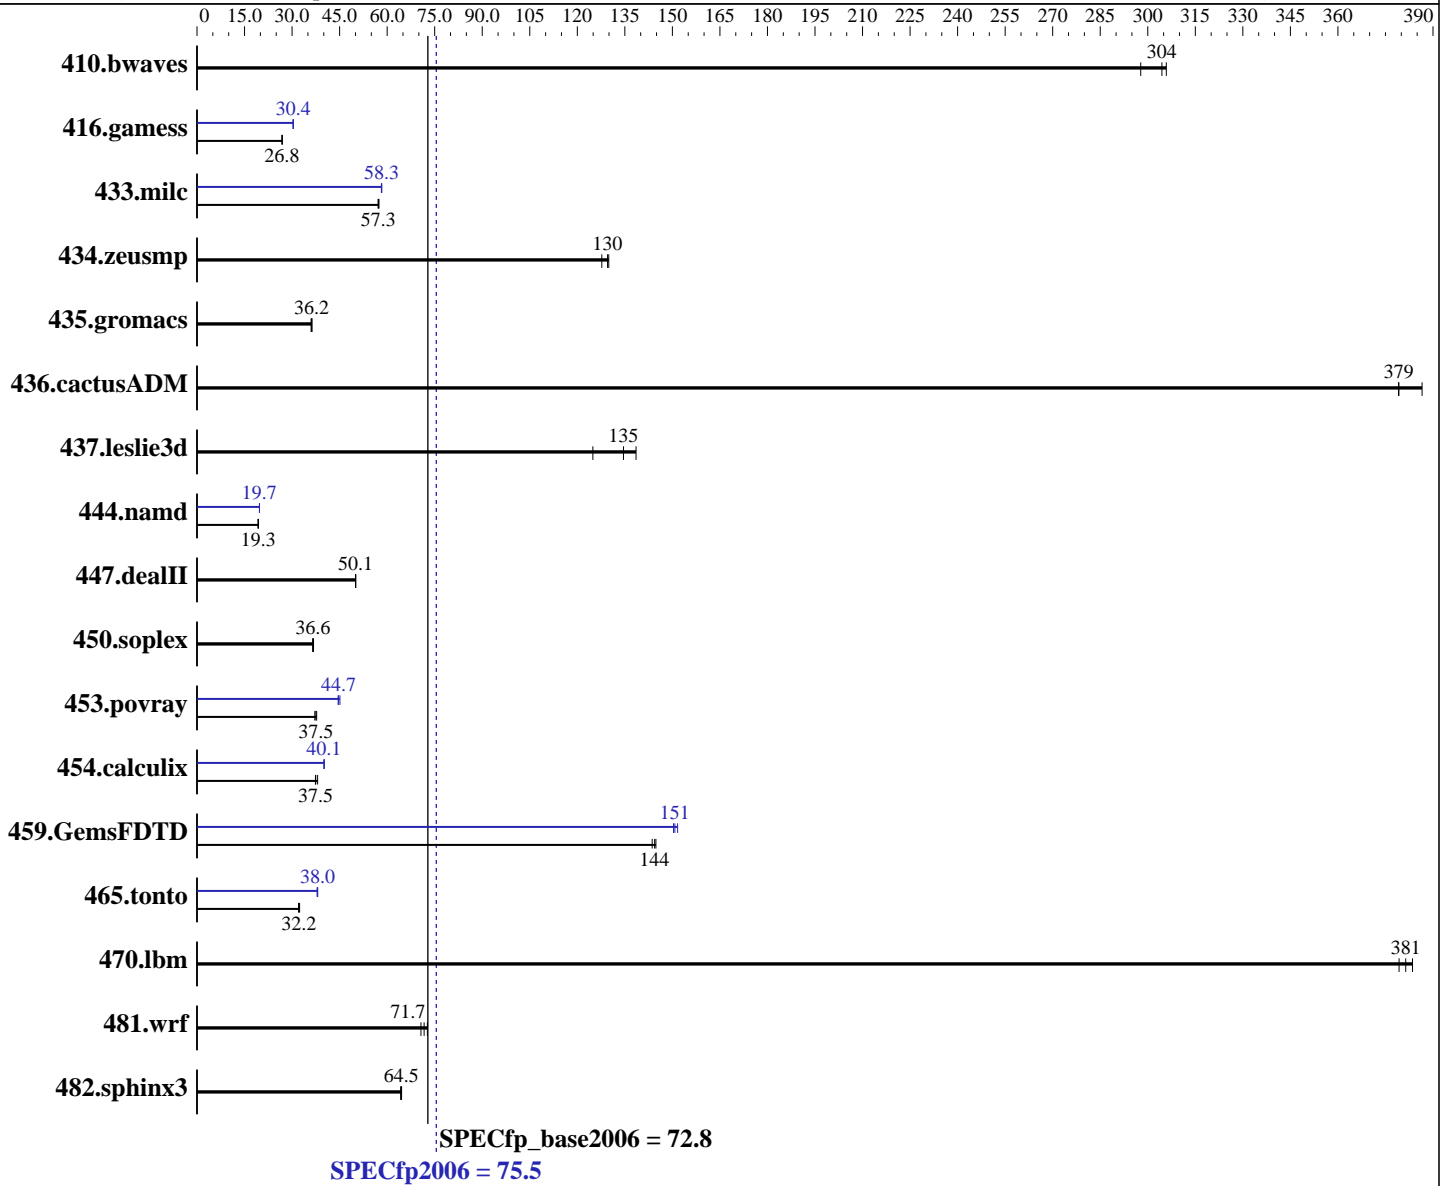

Hardware

CPU Name: Intel Xeon E5-2430L v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Kernel 2.6.32-358.23.2.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = **75.5**

Express5800/E120e-M (Intel Xeon E5-2430L v2)

SPECfp_base2006 = **72.8**

CPU2006 license: 9006

Test date: Mar-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Oct-2013

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 192 GB (12 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	44.4	306	45.6	298	44.6	304	44.4	306	45.6	298	44.6	304
416.gamess	727	26.9	730	26.8	730	26.8	645	30.4	645	30.4	645	30.4
433.milc	161	57.1	160	57.4	160	57.3	158	58.3	158	58.3	158	58.2
434.zeusmp	70.0	130	71.2	128	70.2	130	70.0	130	71.2	128	70.2	130
435.gromacs	197	36.2	198	36.0	197	36.3	197	36.2	198	36.0	197	36.3
436.cactusADM	31.5	379	31.5	379	30.9	387	31.5	379	31.5	379	30.9	387
437.leslie3d	69.9	135	75.3	125	67.9	139	69.9	135	75.3	125	67.9	139
444.namd	415	19.3	415	19.3	416	19.3	407	19.7	407	19.7	407	19.7
447.dealII	229	50.0	228	50.1	228	50.1	229	50.0	228	50.1	228	50.1
450.soplex	227	36.8	228	36.6	229	36.5	227	36.8	228	36.6	229	36.5
453.povray	143	37.2	141	37.8	142	37.5	119	44.5	118	45.1	119	44.7
454.calculix	220	37.5	221	37.4	217	38.1	206	40.1	206	40.1	206	40.1
459.GemsFDTD	73.3	145	73.5	144	73.9	144	70.4	151	70.6	150	70.0	152
465.tonto	307	32.0	305	32.2	304	32.4	260	37.9	259	38.0	258	38.1
470.lbm	36.2	379	35.8	384	36.0	381	36.2	379	35.8	384	36.0	381
481.wrf	156	71.7	158	70.7	154	72.7	156	71.7	158	70.7	154	72.7
482.sphinx3	303	64.3	302	64.5	302	64.6	303	64.3	302	64.5	302	64.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
 Energy Performance: Performance
 Memory Voltage: 1.5 V

General Notes

Environment variables set by runspec before the start of the run:
 KMP_AFFINITY = "granularity=fine,compact,1,0"
 LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 75.5

Express5800/E120e-M (Intel Xeon E5-2430L v2)

SPECfp_base2006 = 72.8

CPU2006 license: 9006

Test date: Mar-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Oct-2013

General Notes (Continued)

OMP_NUM_THREADS = "12"

Added glibc-static-2.12-1.107.el6.x86_64.rpm
to enable static linking

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 75.5

Express5800/E120e-M (Intel Xeon E5-2430L v2)

SPECfp_base2006 = 72.8

CPU2006 license: 9006

Test date: Mar-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Oct-2013

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 75.5

Express5800/E120e-M (Intel Xeon E5-2430L v2)

SPECfp_base2006 = 72.8

CPU2006 license: 9006

Test date: Mar-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 75.5

Express5800/E120e-M (Intel Xeon E5-2430L v2)

SPECfp_base2006 = 72.8

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:43:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 April 2014.