



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®_rate2006 = 482

Huawei E9000 CH221 (Intel Xeon E5-2658)

SPECint_rate_base2006 = 465

CPU2006 license: 3175


Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

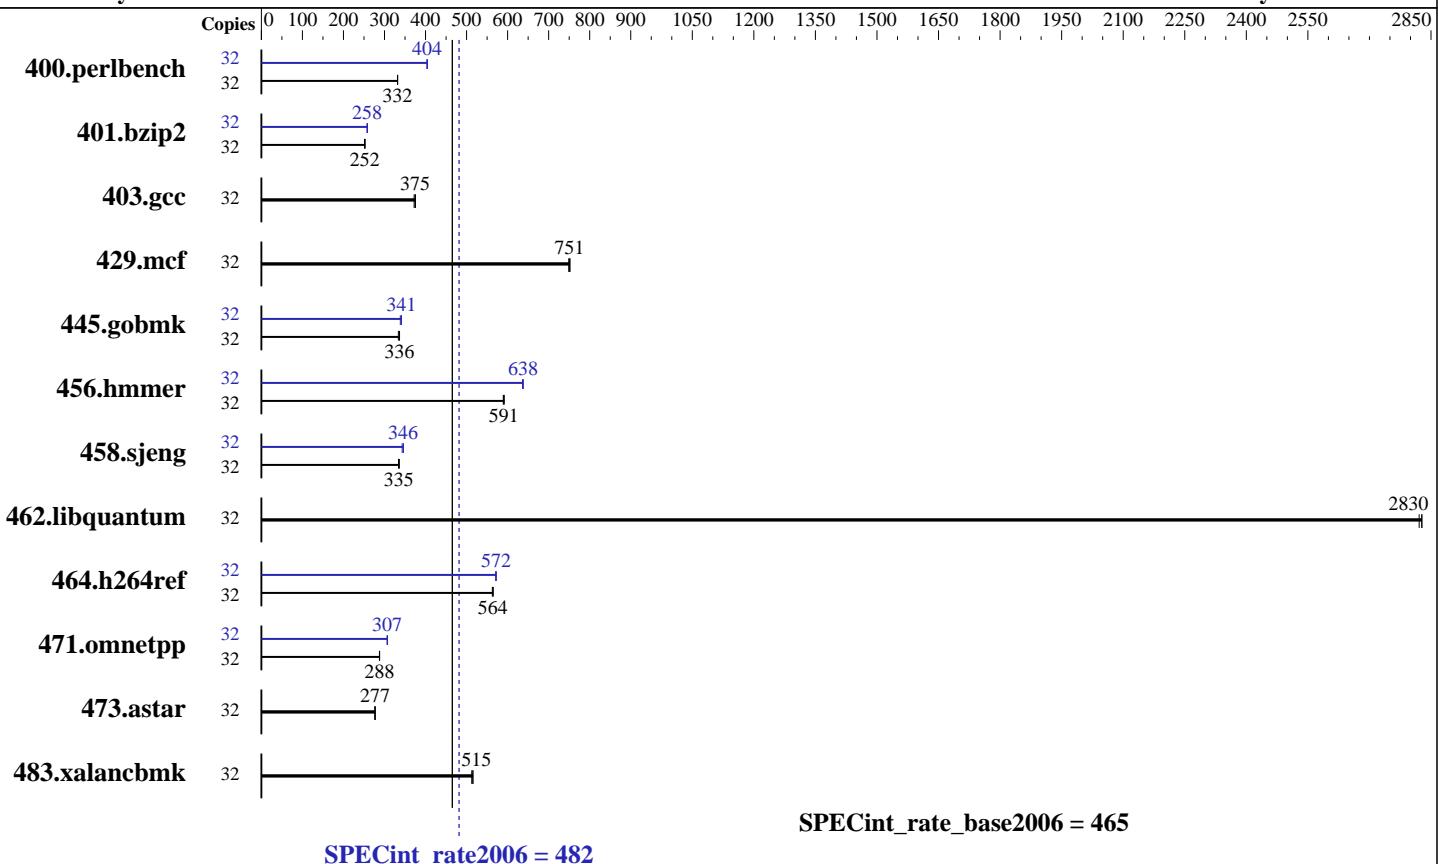

SPECint_rate_base2006 = 465

Hardware

CPU Name:	Intel Xeon E5-2658
CPU Characteristics:	Intel Turbo Boost Technology up to 2.40 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx8 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 300 GB SAS, 10000RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 482

Huawei E9000 CH221 (Intel Xeon E5-2658)

SPECint_rate_base2006 = 465

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	942	332	942	332	942	332	32	773	404	774	404	774	404
401.bzip2	32	1223	253	1229	251	1224	252	32	1197	258	1196	258	1198	258
403.gcc	32	686	375	688	375	692	372	32	686	375	688	375	692	372
429.mcf	32	388	752	389	751	390	749	32	388	752	389	751	390	749
445.gobmk	32	1006	334	999	336	997	337	32	992	339	984	341	984	341
456.hmmer	32	507	589	506	591	504	592	32	469	636	468	638	468	638
458.sjeng	32	1152	336	1159	334	1156	335	32	1129	343	1120	346	1119	346
462.libquantum	32	235	2820	234	2830	234	2830	32	235	2820	234	2830	234	2830
464.h264ref	32	1255	564	1258	563	1254	565	32	1240	571	1238	572	1238	572
471.omnetpp	32	694	288	695	288	695	288	32	651	307	653	306	652	307
473.astar	32	811	277	810	277	812	276	32	811	277	810	277	812	276
483.xalancbmk	32	428	515	431	513	428	515	32	428	515	431	513	428	515

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on wbspeccpu Mon Jul 14 09:06:25 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2658 0 @ 2.10GHz
  2 "physical id"s (chips)
  32 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 482

Huawei E9000 CH221 (Intel Xeon E5-2658)

SPECint_rate_base2006 = 465

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

Platform Notes (Continued)

```
caution.)  
    cpu cores : 8  
    siblings   : 16  
    physical 0: cores 0 1 2 3 4 5 6 7  
    physical 1: cores 0 1 2 3 4 5 6 7  
    cache size : 20480 KB  
  
From /proc/meminfo  
MemTotal:      132103760 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
/usr/bin/lsb_release -d  
Red Hat Enterprise Linux Server release 6.5 (Santiago)  
  
From /etc/*release* /etc/*version*  
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server  
  
uname -a:  
Linux wbspeccpu 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013  
x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Jul 9 17:06  
  
SPEC is set to: /spec  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sdal      ext4  270G   66G  191G  26% /  
  
Additional information from dmidecode:  
BIOS Insyde Corp. RMIBV372 12/21/2013  
Memory:  
16x Micron 18JSF1G72PDZ-1G6E 8 GB 1600 MHz 2 rank  
8x NO DIMM NO DIMM  
  
(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH221 (Intel Xeon E5-2658)

SPECint_rate2006 = 482

SPECint_rate_base2006 = 465

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

General Notes (Continued)

The Huawei E9000 CH220 and Huawei E9000 CH221 and
the Huawei E9000 CH222 models are electronically equivalent.
The results have been measured on a Huawei E9000 CH220 model

Base Compiler Invocation

C benchmarks:

 icc -m32

C++ benchmarks:

 icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

 icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 482

Huawei E9000 CH221 (Intel Xeon E5-2658)

SPECint_rate_base2006 = 465

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 482

Huawei E9000 CH221 (Intel Xeon E5-2658)

SPECint_rate_base2006 = 465

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 2 13:39:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 September 2014.