



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2630 v3, 2.40 GHz)

SPECfp[®]_rate2006 = 575

SPECfp_rate_base2006 = 559

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

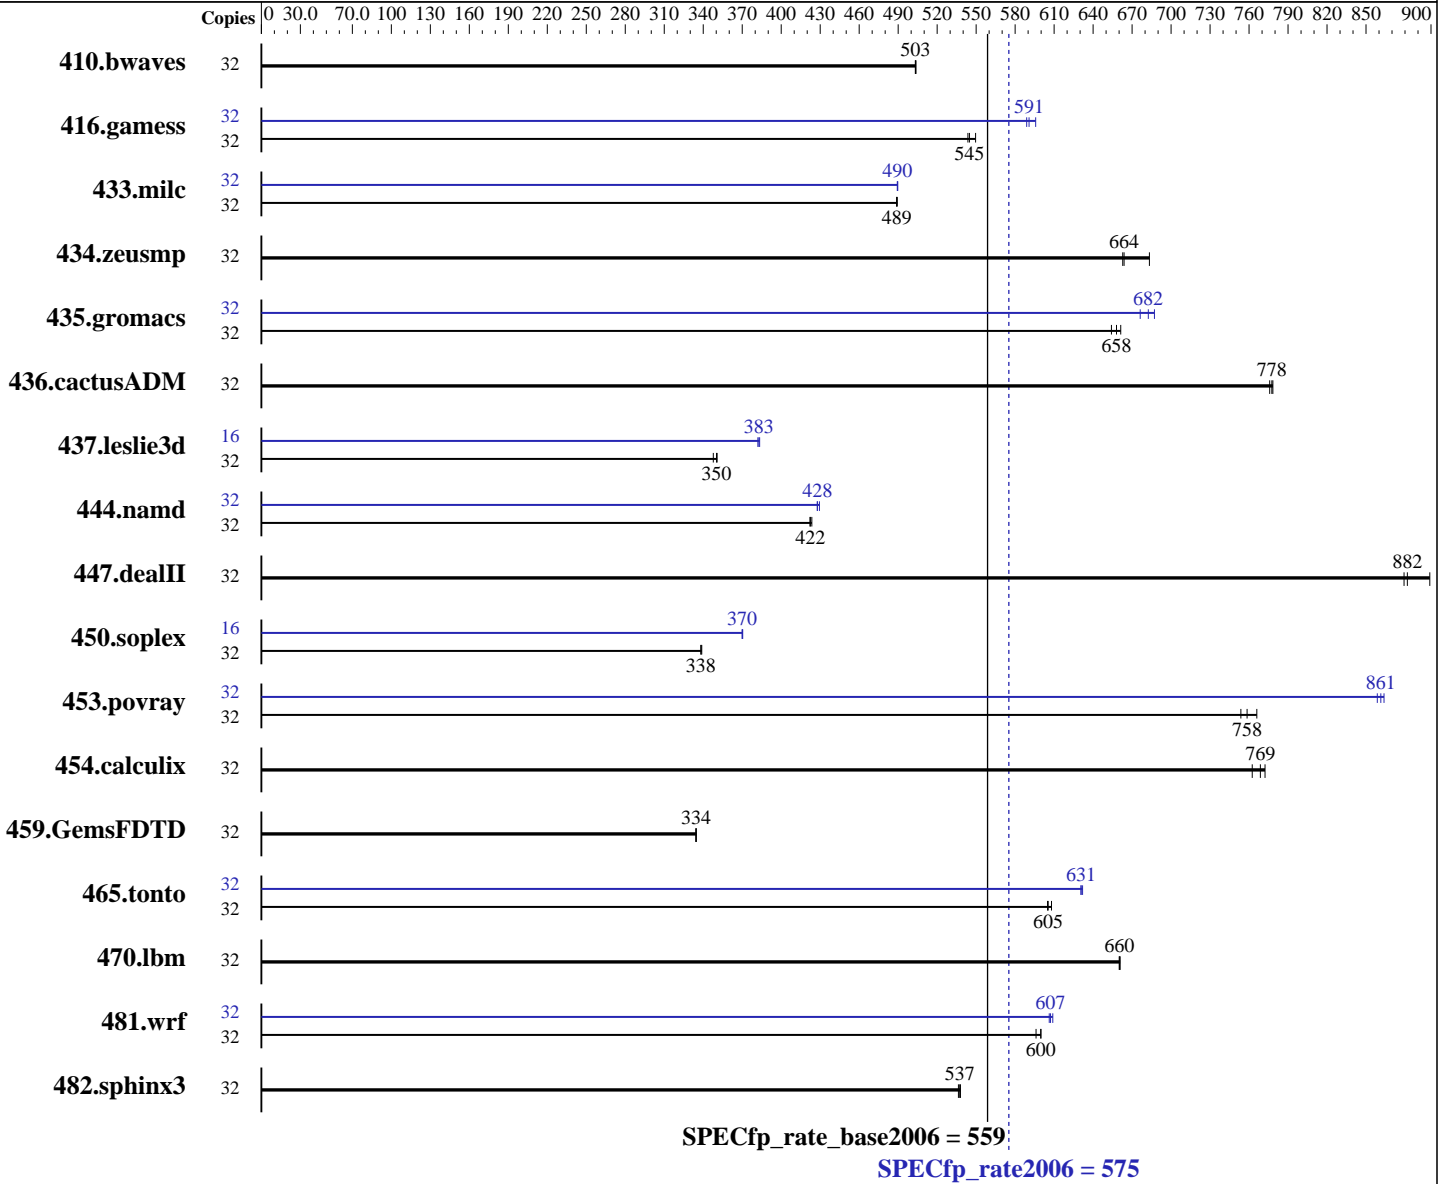

Hardware

CPU Name: Intel Xeon E5-2630 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext2
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2630 v3, 2.40 GHz)

SPECfp_rate2006 = **575**

SPECfp_rate_base2006 = **559**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem: 1 x 1000 GB 7200 RPM SATA
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	863	504	864	503	864	503	32	863	504	864	503	864	503
416.gamess	32	1150	545	1140	550	1152	544	32	1052	596	1064	589	1061	591
433.milc	32	600	489	601	489	601	489	32	600	490	600	490	600	489
434.zeusmp	32	426	683	439	663	439	664	32	426	683	439	663	439	664
435.gromacs	32	346	661	349	654	347	658	32	332	687	335	682	338	676
436.cactusADM	32	493	776	492	778	491	778	32	493	776	492	778	491	778
437.leslie3d	32	859	350	858	351	865	348	16	394	382	393	383	392	383
444.namd	32	608	422	606	424	608	422	32	600	428	600	428	598	429
447.dealII	32	407	899	415	882	416	879	32	407	899	415	882	416	879
450.soplex	32	788	339	789	338	789	338	16	361	370	360	370	361	370
453.povray	32	226	754	222	766	224	758	32	198	859	198	861	197	864
454.calculix	32	342	772	343	769	346	762	32	342	772	343	769	346	762
459.GemsFDTD	32	1015	335	1015	334	1015	334	32	1015	335	1015	334	1015	334
465.tonto	32	520	605	518	608	521	605	32	499	631	499	631	498	632
470.lbm	32	666	660	665	661	666	660	32	666	660	665	661	666	660
481.wrf	32	596	600	596	600	600	596	32	587	609	590	606	589	607
482.sphinx3	32	1161	537	1163	536	1159	538	32	1161	537	1163	536	1159	538

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Snoop Mode set to Early Snoop
Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2630 v3,
2.40 GHz)

SPECfp_rate2006 = 575

SPECfp_rate_base2006 = 559

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Platform Notes (Continued)

```
Execute Disable disabled
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on linux Mon Jun 30 23:23:46 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2630 v3 @ 2.40GHz
 2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264441016 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 30 11:48 last=S
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext2  726G  10G  715G   2% /
```

```
Additional information from dmidecode:
BIOS Dell Inc. 0.3.25 06/19/2014
Memory:
16x 002C00B3002C 36ASF2G72PZ-2G1A1 16 GB 1866 MHz
8x Not Specified Not Specified
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2630 v3,
2.40 GHz)

SPECfp_rate2006 = 575

SPECfp_rate_base2006 = 559

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2630 v3,
2.40 GHz)

SPECfp_rate2006 = 575

SPECfp_rate_base2006 = 559

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Base Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2630 v3,
2.40 GHz)

SPECfp_rate2006 = 575

SPECfp_rate_base2006 = 559

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2)
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
          -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2)
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
          -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2630 v3,
2.40 GHz)

SPECfp_rate2006 = 575

SPECfp_rate_base2006 = 559

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 24 16:20:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 September 2014.