



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

**SPECint®2006 = 59.9**

Sugon I620-G20 (Intel Xeon E5-2685 v3)

**SPECint\_base2006 = 56.6**

CPU2006 license: 9046


Test date: Nov-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

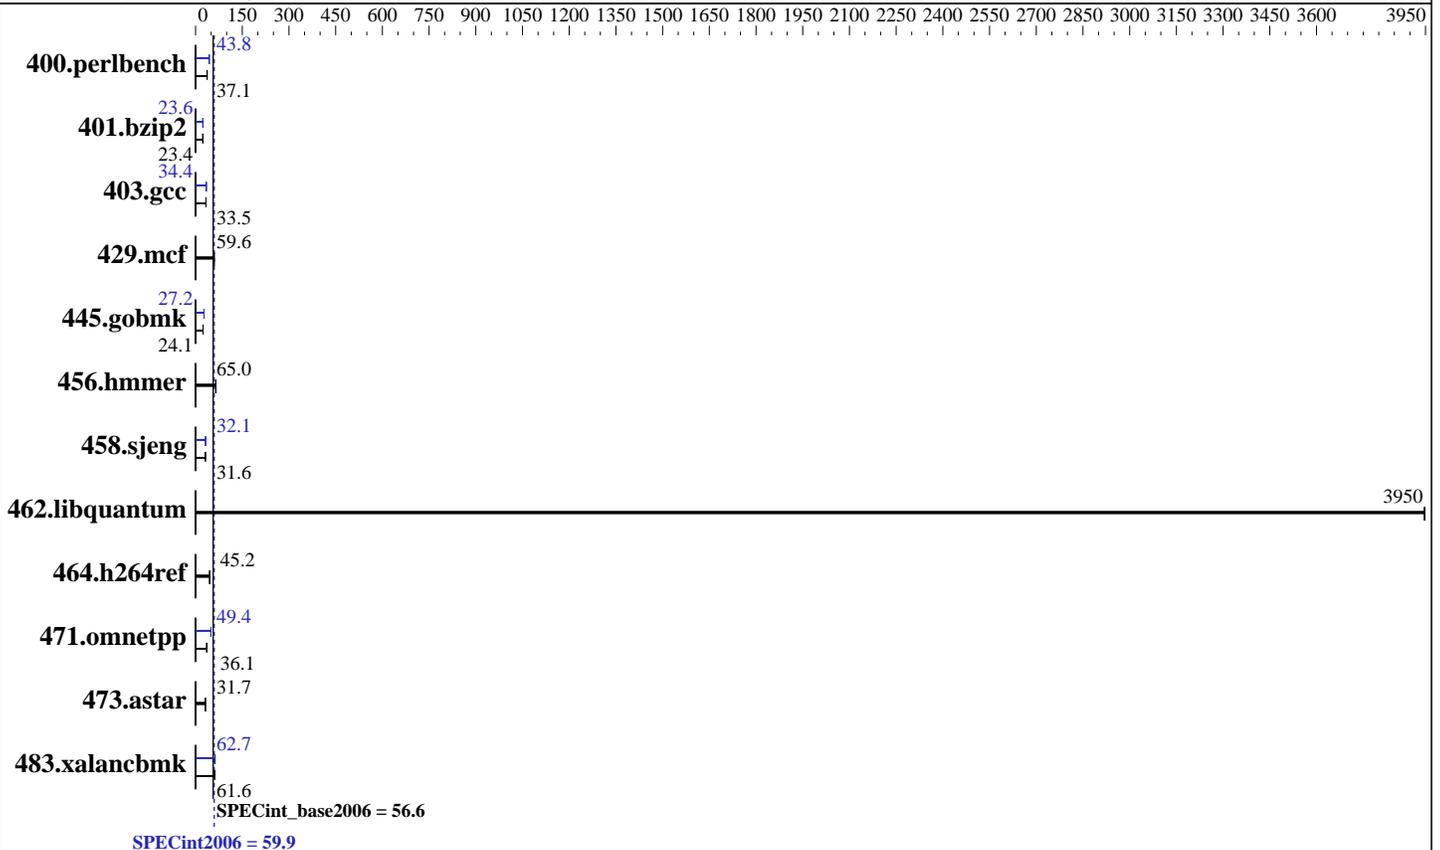

### Hardware

CPU Name: Intel Xeon E5-2685 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 2.0 TB SATA 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECint2006 = **59.9**

## Sugon I620-G20 (Intel Xeon E5-2685 v3)

SPECint\_base2006 = **56.6**

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Nov-2014  
Hardware Availability: Sep-2014  
Software Availability: Nov-2013

### Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	263	37.2	<b>263</b>	<b>37.1</b>	264	37.0	223	43.8	<b>223</b>	<b>43.8</b>	223	43.9
401.bzip2	<b>412</b>	<b>23.4</b>	412	23.4	412	23.4	410	23.5	<b>409</b>	<b>23.6</b>	409	23.6
403.gcc	241	33.5	<b>240</b>	<b>33.5</b>	240	33.6	235	34.2	<b>234</b>	<b>34.4</b>	232	34.7
429.mcf	<b>153</b>	<b>59.6</b>	153	59.5	152	60.1	<b>153</b>	<b>59.6</b>	153	59.5	152	60.1
445.gobmk	<b>435</b>	<b>24.1</b>	434	24.2	435	24.1	385	27.2	386	27.2	<b>386</b>	<b>27.2</b>
456.hammer	<b>144</b>	<b>65.0</b>	142	65.5	144	64.8	<b>144</b>	<b>65.0</b>	142	65.5	144	64.8
458.sjeng	383	31.6	<b>383</b>	<b>31.6</b>	382	31.7	376	32.2	377	32.1	<b>376</b>	<b>32.1</b>
462.libquantum	<b>5.25</b>	<b>3950</b>	5.25	3950	5.25	3950	<b>5.25</b>	<b>3950</b>	5.25	3950	5.25	3950
464.h264ref	<b>490</b>	<b>45.2</b>	487	45.4	490	45.2	<b>490</b>	<b>45.2</b>	487	45.4	490	45.2
471.omnetpp	171	36.4	<b>173</b>	<b>36.1</b>	177	35.3	<b>126</b>	<b>49.4</b>	126	49.5	126	49.4
473.astar	223	31.4	<b>221</b>	<b>31.7</b>	221	31.8	223	31.4	<b>221</b>	<b>31.7</b>	221	31.8
483.xalancbmk	113	61.0	112	61.7	<b>112</b>	<b>61.6</b>	<b>110</b>	<b>62.7</b>	110	62.7	111	62.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The config file option 'submit' was used.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Platform Notes

BIOS Configuration:

Enforce POR set to disabled

DDR Speed set to 2133

Early Snoop set to disabled

COD set to disable

Power Technology set to performance

Sysinfo program /home/cpu2006/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on localhost Thu Nov 13 10:53:23 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2685 v3 @ 2.60GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECint2006 = 59.9

## Sugon I620-G20 (Intel Xeon E5-2685 v3)

SPECint\_base2006 = 56.6

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

### Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 12
siblings  : 12
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

From /proc/meminfo

```
MemTotal:      264480248 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 12 23:26

SPEC is set to: /home/cpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  1.8T   17G  1.7T   1% /
```

Additional information from dmidecode:

```
BIOS American Megatrends Inc. 067 08/13/2014
```

Memory:

```
16x 16 GB
8x NO DIMM NO DIMM
16x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"
OMP_NUM_THREADS = "12"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = 59.9

Sugon I620-G20 (Intel Xeon E5-2685 v3)

SPECint\_base2006 = 56.6

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## General Notes (Continued)

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Submitted\_by: Tian Yuwan <tianyw@sugon.com>  
Submitted: Mon Nov 24 19:24:05 EST 2014  
Submission: cpu2006-20141116-32836.sub

Submitted\_by: Tian Yuwan <tianyw@sugon.com>  
Submitted: Wed Nov 26 05:11:52 EST 2014  
Submission: cpu2006-20141116-32836.sub

Submitted\_by: Tian Yuwan <tianyw@sugon.com>  
Submitted: Thu Nov 27 00:57:34 EST 2014  
Submission: cpu2006-20141116-32836.sub

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = 59.9

Sugon I620-G20 (Intel Xeon E5-2685 v3)

SPECint\_base2006 = 56.6

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = 59.9

Sugon I620-G20 (Intel Xeon E5-2685 v3)

SPECint\_base2006 = 56.6

CPU2006 license: 9046

Test date: Nov-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmarheap

473.astar: basepeak = yes

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-ansi-alias -Wl,-z,muldefs -L/sh -lsmarheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.20141203.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.20141203.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = 59.9

Sugon I620-G20 (Intel Xeon E5-2685 v3)

SPECint\_base2006 = 56.6

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Dec 3 10:29:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 December 2014.