



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®_rate2006 = 189

Huawei RH2288H v2 (Intel Xeon E5-2603 v2)

SPECint_rate_base2006 = 183

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2013

Software Availability: Jun-2014

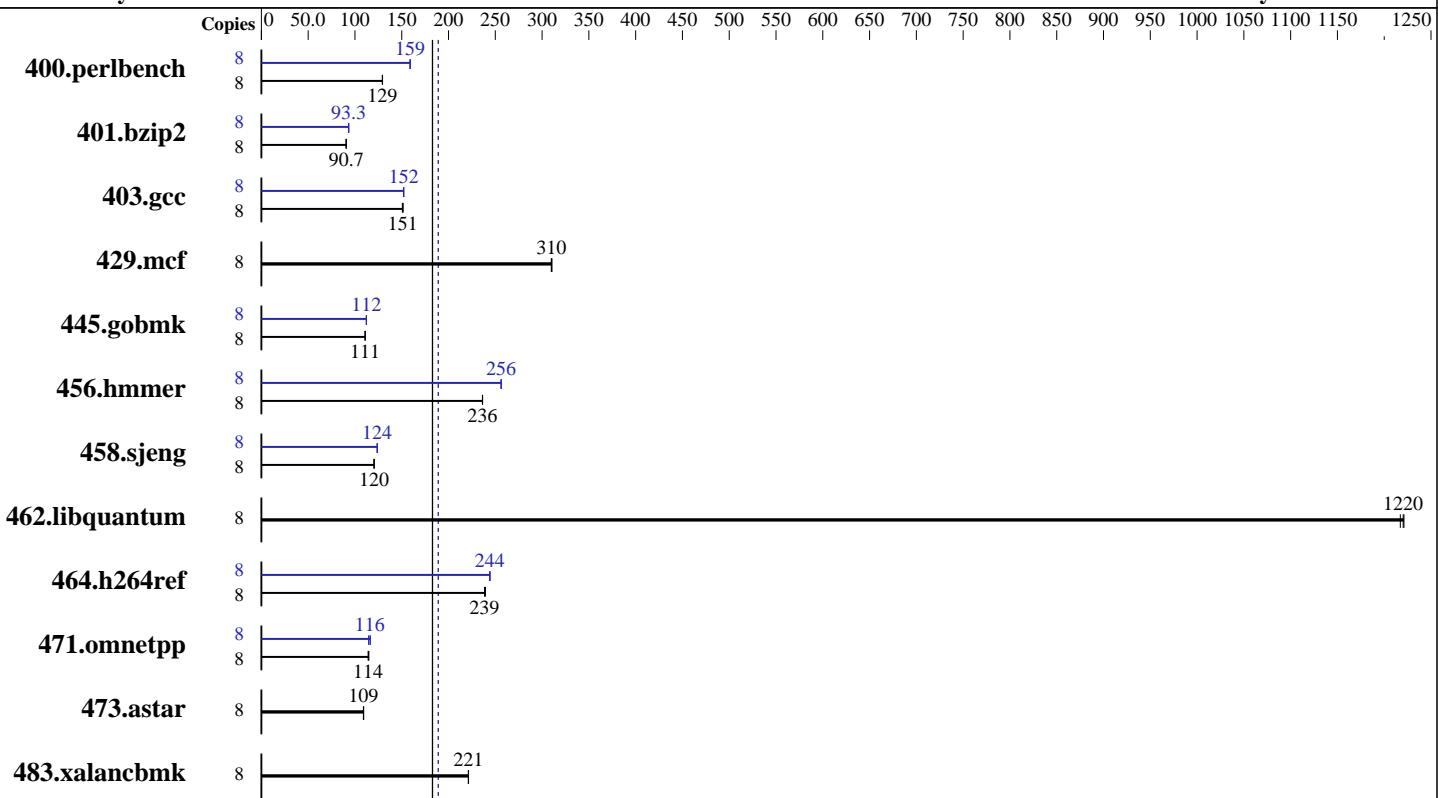

SPECint_rate_base2006 = 183

SPECint_rate2006 = 189

Hardware

CPU Name:	Intel Xeon E5-2603 v2
CPU Characteristics:	
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	10 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 189

Huawei RH2288H v2 (Intel Xeon E5-2603 v2)

SPECint_rate_base2006 = 183

CPU2006 license: 3175

Test date: Nov-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Jun-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	605	129	604	130	604	129	8	492	159	491	159	491	159
401.bzip2	8	851	90.7	851	90.7	852	90.6	8	828	93.2	827	93.3	827	93.4
403.gcc	8	427	151	426	151	426	151	8	423	152	423	152	424	152
429.mcf	8	235	311	236	310	235	310	8	235	311	236	310	235	310
445.gobmk	8	757	111	756	111	757	111	8	748	112	748	112	748	112
456.hammer	8	316	236	316	236	316	236	8	291	256	291	256	291	256
458.sjeng	8	803	121	804	120	804	120	8	781	124	782	124	782	124
462.libquantum	8	136	1220	136	1220	136	1220	8	136	1220	136	1220	136	1220
464.h264ref	8	739	240	742	239	742	239	8	724	244	726	244	725	244
471.omnetpp	8	435	115	438	114	438	114	8	431	116	437	115	429	117
473.astar	8	514	109	514	109	515	109	8	514	109	514	109	515	109
483.xalancbmk	8	249	221	249	221	250	221	8	249	221	249	221	250	221

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec15/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1

running on localhost.localdomain Mon Nov 24 04:11:55 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2603 v2 @ 1.80GHz
  2 "physical id"s (chips)
  8 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 189

Huawei RH2288H v2 (Intel Xeon E5-2603 v2)

SPECint_rate_base2006 = 183

CPU2006 license: 3175

Test date: Nov-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Jun-2014

Platform Notes (Continued)

```
caution.)  
    cpu cores : 4  
    siblings   : 4  
    physical 0: cores 0 1 2 3  
    physical 1: cores 0 1 2 3  
    cache size : 10240 KB  
  
From /proc/meminfo  
MemTotal:      263924204 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
From /etc/*release* /etc/*version*  
os-release:  
  NAME="Red Hat Enterprise Linux Server"  
  VERSION="7.0 (Maipo)"  
  ID="rhel"  
  ID_LIKE="fedora"  
  VERSION_ID="7.0"  
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"  
  ANSI_COLOR="0;31"  
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"  
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server  
  
uname -a:  
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57  
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Nov 24 04:06  
  
SPEC is set to: /spec15  
Filesystem           Type  Size  Used Avail Use% Mounted on  
/dev/mapper/rhel-root ext4  256G  67G  176G  28% /  
Additional information from dmidecode:  
  
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.  
  
BIOS Insyde Corp. RMIBV629 05/12/2014  
Memory:  
16x Hynix HMT42GR7BFR4C-RD 16 GB 2 rank 1867 MHz, configured at 1333 MHz  
8x NO DIMM NO DIMM  
  
(End of data from sysinfo program)
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288H v2 (Intel Xeon E5-2603 v2)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECint_rate2006 = 189

SPECint_rate_base2006 = 183

Test date: Nov-2014

Hardware Availability: Sep-2013

Software Availability: Jun-2014

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec15/libs/32:/spec15/libs/64:/spec15/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
memory using RedHat EL 7.0
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288H v2 (Intel Xeon E5-2603 v2)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECint_rate2006 = 189

SPECint_rate_base2006 = 183

Test date: Nov-2014

Hardware Availability: Sep-2013

Software Availability: Jun-2014

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288H v2 (Intel Xeon E5-2603 v2)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECint_rate2006 = 189

SPECint_rate_base2006 = 183

Test date: Nov-2014

Hardware Availability: Sep-2013

Software Availability: Jun-2014

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=__alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Dec 16 13:09:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 December 2014.