



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A6 PRO-7400B with Radeon R5 Graphics)

SPECint®_rate2006 = 35.7

SPECint_rate_base2006 = 34.1

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2014

Hardware Availability: Jul-2014

Software Availability: Oct-2013

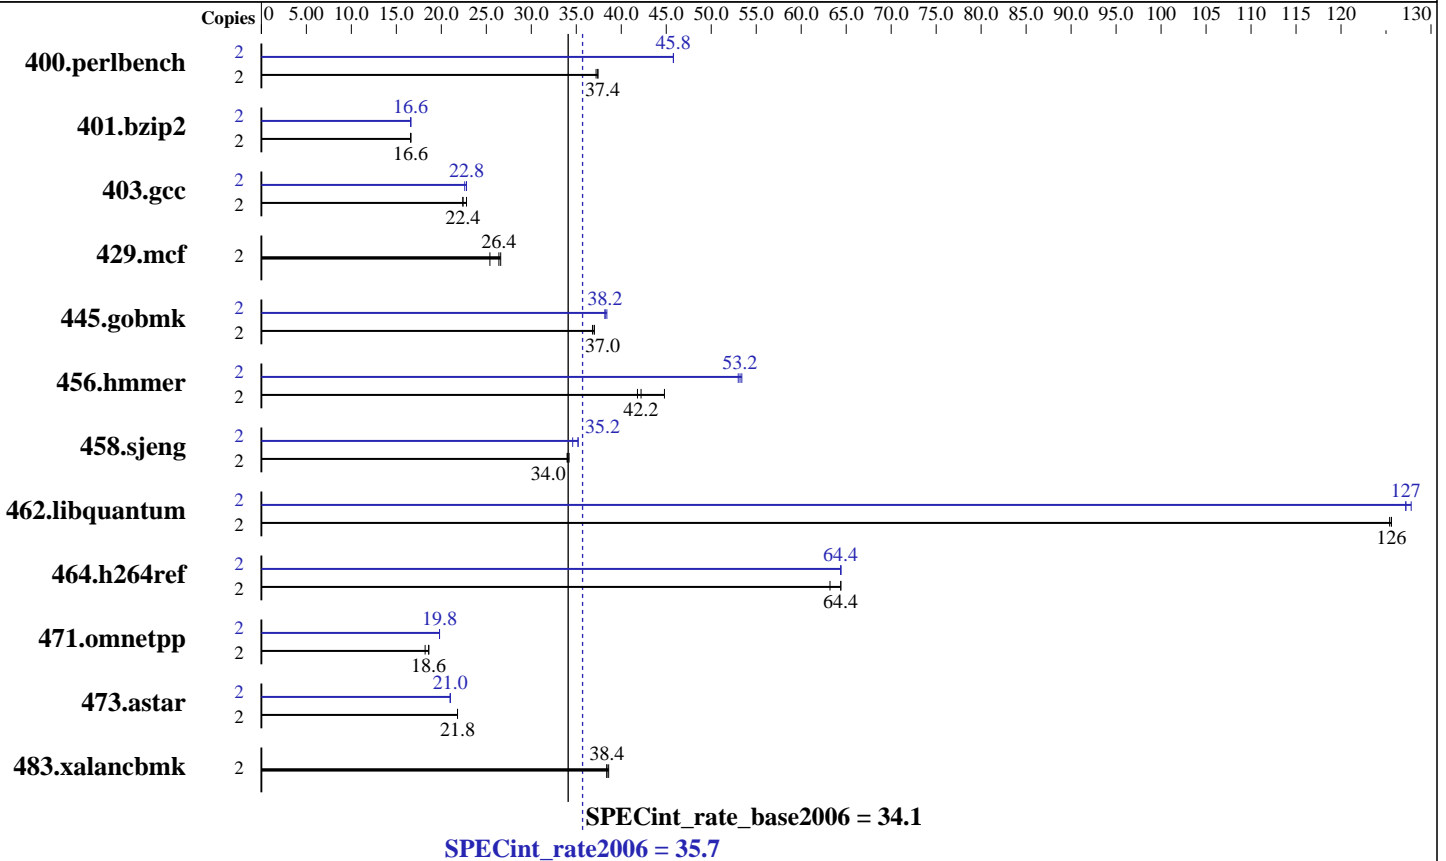

Hardware

CPU Name: AMD A6 PRO-7400B
 CPU Characteristics: AMD Turbo CORE technology up to 3.90 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 96 KB I on chip per chip; 16 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx4 PC3-14900U-13)
 Disk Subsystem: 160 GB Western Digital SATA HDD, 7200 RPM
 Other Hardware: None

Software

Operating System: Microsoft Windows 8.1 Pro
 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A6 PRO-7400B with Radeon R5 Graphics)

SPECint_rate2006 = 35.7

SPECint_rate_base2006 = 34.1

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2014

Hardware Availability: Jul-2014

Software Availability: Oct-2013

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	523	37.4	525	37.2	522	37.4	2	426	45.8	426	45.8	427	45.8
401.bzip2	2	1164	16.6	1161	16.6	1162	16.6	2	1161	16.6	1164	16.6	1160	16.6
403.gcc	2	705	22.8	716	22.4	718	22.4	2	704	22.8	708	22.8	712	22.6
429.mcf	2	692	26.4	685	26.6	719	25.4	2	692	26.4	685	26.6	719	25.4
445.gobmk	2	570	36.8	566	37.0	568	37.0	2	549	38.2	551	38.2	547	38.4
456.hammer	2	416	44.8	441	42.2	445	41.8	2	350	53.2	353	53.0	350	53.4
458.sjeng	2	708	34.2	713	34.0	714	34.0	2	687	35.2	700	34.6	689	35.2
462.libquantum	2	330	126	330	126	330	125	2	326	127	324	128	326	127
464.h264ref	2	687	64.4	700	63.2	688	64.4	2	688	64.4	688	64.4	686	64.4
471.omnetpp	2	670	18.6	686	18.2	671	18.6	2	632	19.8	634	19.8	633	19.8
473.astar	2	644	21.8	645	21.8	643	21.8	2	670	21.0	672	21.0	670	21.0
483.xalancbmk	2	359	38.4	358	38.6	360	38.4	2	359	38.4	358	38.6	360	38.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 32-bit binaries with the command:
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.

Platform Notes

Sysinfo program C:\SPEC14.0/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on CltE03F49B01B77 Fri Nov 7 00:13:12 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'
OS Name : Microsoft Windows 8.1 Pro
OS Version : 6.3.9600 N/A Build 9600
System Manufacturer: System manufacturer
System Model : System Product Name
Processor(s) : 1 Processor(s) Installed.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A6 PRO-7400B with Radeon R5 Graphics)

SPECint_rate2006 = 35.7

SPECint_rate_base2006 = 34.1

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2014

Hardware Availability: Jul-2014

Software Availability: Oct-2013

Platform Notes (Continued)

[01]: AMD64 Family 21 Model 48 Stepping 1 AuthenticAMD ~3500 Mhz
BIOS Version : American Megatrends Inc. 1301, 6/24/2014
Total Physical Memory: 7,105 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0

L2CacheSize : 25359

L3CacheSize : 0

MaxClockSpeed : 3500

Name : AMD A6 PRO-7400B R5, 6 Compute Cores 2C+4G

NumberOfCores : 1

NumberOfLogicalProcessors: 2

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32

464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES

483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:

/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A6 PRO-7400B with Radeon R5 Graphics)

SPECint_rate2006 = 35.7

SPECint_rate_base2006 = 34.1

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2014

Hardware Availability: Jul-2014

Software Availability: Oct-2013

Base Optimization Flags (Continued)

C++ benchmarks:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icl -Qvc10 -Qstd=c99
```

```
456.hmmmer: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
```

```
458.sjeng: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
```

```
462.libquantum: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
-Qstd=c99
```

C++ benchmarks (except as noted below):

```
icl -Qvc10
```

```
473.astar: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
```

Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
456.hmmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A6 PRO-7400B with Radeon R5 Graphics)

SPECint_rate2006 = 35.7

SPECint_rate_base2006 = 34.1

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2014

Hardware Availability: Jul-2014

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

400.perlbench: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

401.bzip2: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: basepeak = yes

445.gobmk: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

458.sjeng: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4
/F512000000

462.libquantum: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000

464.h264ref: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlw32M.lib
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000 shlw64M.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A6 PRO-7400B with Radeon R5 Graphics)

SPECint_rate2006 = 35.7

SPECint_rate_base2006 = 34.1

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2014

Hardware Availability: Jul-2014

Software Availability: Oct-2013

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

456.hmmr: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 27 13:35:11 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 January 2015.