



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECint_rate2006 = 1040

SPECint_rate_base2006 = 991

CPU2006 license: 9008


Test date: Jul-2016

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

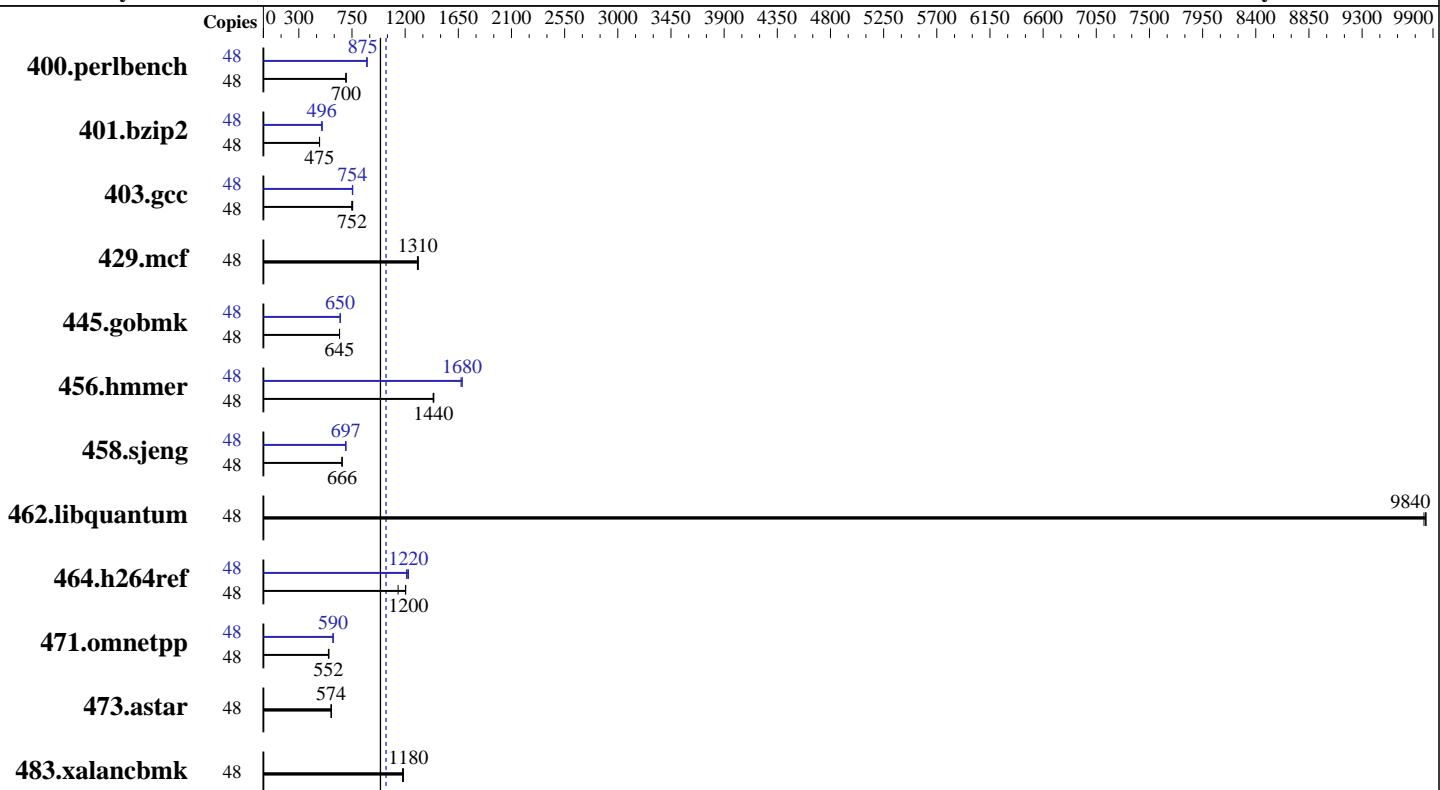

SPECint_rate_base2006 = 991

SPECint_rate2006 = 1040

Hardware

CPU Name: Intel Xeon E5-2650 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 1 x 240 GB SATA II SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Compiler: 3.10.0-327.18.2.el7.x86_64
 Auto Parallel: C/C++: Version 16.0.3.210 of Intel C++ Studio XE for Linux
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECint_rate2006 = 1040

SPECint_rate_base2006 = 991

CPU2006 license: 9008

Test date: Jul-2016

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|--------|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 48 | 671 | 699 | <u>670</u> | <u>700</u> | 670 | 700 | 48 | <u>536</u> | <u>875</u> | 536 | 875 | <u>534</u> | 879 |
| 401.bzip2 | 48 | 975 | 475 | <u>975</u> | <u>475</u> | 974 | 476 | 48 | <u>932</u> | <u>497</u> | <u>934</u> | <u>496</u> | 937 | 494 |
| 403.gcc | 48 | <u>514</u> | <u>752</u> | 511 | 756 | 516 | 748 | 48 | <u>511</u> | <u>757</u> | 513 | 753 | <u>512</u> | <u>754</u> |
| 429.mcf | 48 | <u>335</u> | <u>1310</u> | 334 | 1310 | 336 | 1300 | 48 | <u>335</u> | <u>1310</u> | 334 | 1310 | 336 | 1300 |
| 445.gobmk | 48 | 781 | 645 | <u>781</u> | <u>645</u> | 782 | 644 | 48 | <u>774</u> | <u>650</u> | 774 | 650 | 774 | 651 |
| 456.hammer | 48 | 312 | 1440 | <u>311</u> | <u>1440</u> | 310 | 1440 | 48 | 268 | 1670 | 266 | 1680 | <u>266</u> | <u>1680</u> |
| 458.sjeng | 48 | 872 | 666 | <u>872</u> | <u>666</u> | 872 | 666 | 48 | <u>833</u> | <u>697</u> | 831 | 699 | 834 | 697 |
| 462.libquantum | 48 | 101 | 9820 | 101 | 9840 | <u>101</u> | <u>9840</u> | 48 | 101 | 9820 | 101 | 9840 | <u>101</u> | <u>9840</u> |
| 464.h264ref | 48 | 931 | 1140 | 881 | 1210 | <u>883</u> | <u>1200</u> | 48 | <u>870</u> | <u>1220</u> | 865 | 1230 | 877 | 1210 |
| 471.omnetpp | 48 | 541 | 555 | 545 | 550 | <u>543</u> | <u>552</u> | 48 | 509 | 589 | 507 | 592 | <u>508</u> | <u>590</u> |
| 473.astar | 48 | 587 | 574 | <u>587</u> | <u>574</u> | 586 | 575 | 48 | <u>587</u> | <u>574</u> | <u>587</u> | <u>574</u> | 586 | 575 |
| 483.xalancbmk | 48 | 281 | 1180 | <u>280</u> | <u>1180</u> | 279 | 1190 | 48 | 281 | 1180 | <u>280</u> | <u>1180</u> | 279 | 1190 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings

Hyper-Threading (All) = Enable
Power Technology = Energy Efficient
Enforce POR = Disabled
Memory Frequency = 2133
COD Enable = Enable

BMC Setting

Fan Mode = Full Speed

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 ## e86d102572650a6e4d596a3cee98f191
running on SUT Fri Jul 22 07:28:19 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

| | |
|---|------------------------------------|
| ACTION S.A. | SPECint_rate2006 = 1040 |
| ACTINA SOLAR 222 S6 (Intel Xeon E5-2650 v4, 2.20 GHz) | SPECint_rate_base2006 = 991 |
| CPU2006 license: 9008 | Test date: Jul-2016 |
| Test sponsor: ACTION S.A. | Hardware Availability: Mar-2016 |
| Tested by: ACTION S.A. | Software Availability: Mar-2016 |

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 v4 @ 2.20GHz
  2 "physical id"s (chips)
  48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 12
  siblings : 24
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 15360 KB

From /proc/meminfo
MemTotal:      263856576 kB
HugePages_Total:       1
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.2 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.2"
  PRETTY_NAME="Red Hat Enterprise Linux"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
os-release.rpmsave:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.0 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.0"
  PRETTY_NAME="Red Hat Enterprise Linux"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:
Linux SUT 3.10.0-327.18.2.el7.x86_64 #2 SMP Wed Jun 1 17:37:13 CEST 2016
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jul 22 07:26

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4  212G  131G  70G  66% /
Continued on next page
```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

| | |
|---|------------------------------------|
| ACTION S.A. | SPECint_rate2006 = 1040 |
| ACTINA SOLAR 222 S6 (Intel Xeon E5-2650 v4, 2.20 GHz) | SPECint_rate_base2006 = 991 |
| CPU2006 license: 9008 | Test date: Jul-2016 |
| Test sponsor: ACTION S.A. | Hardware Availability: Mar-2016 |
| Tested by: ACTION S.A. | Software Availability: Mar-2016 |

Platform Notes (Continued)

Additional information from dmidecode:

BIOS American Megatrends Inc. 2.0 12/17/2015

Memory:

16x 16 GB

16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2400 MHz 2 rank

(End of data from sysinfo program)

dmidecode does not properly detect memory modules

16 modules of 16 GB were used to run the test (256 GB total)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/lib/32:/cpu2006.1.2/lib/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enable

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Binaries compiled on a system with 2x Xeon E5-2650 v4 chips + 256 GB memory
using RedHat EL 7.2

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/lib/ia32_lin

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

| | |
|---|------------------------------------|
| ACTION S.A. | SPECint_rate2006 = 1040 |
| ACTINA SOLAR 222 S6 (Intel Xeon E5-2650 v4, 2.20 GHz) | SPECint_rate_base2006 = 991 |
| CPU2006 license: 9008 | Test date: Jul-2016 |
| Test sponsor: ACTION S.A. | Hardware Availability: Mar-2016 |
| Tested by: ACTION S.A. | Software Availability: Mar-2016 |

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/lib/ia32_lin
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/lib/ia32_lin
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

| | |
|---|--|
| ACTION S.A. | SPECint_rate2006 = 1040 |
| ACTINA SOLAR 222 S6 (Intel Xeon E5-2650 v4, 2.20 GHz) | SPECint_rate_base2006 = 991 |
| CPU2006 license: 9008 | Test date: Jul-2016 |
| Test sponsor: ACTION S.A. | Hardware Availability: Mar-2016 |
| Tested by: ACTION S.A. | Software Availability: Mar-2016 |

Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevD-aug-2015-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevD-aug-2015-For-Supermicro-Platform.xml>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

| | |
|---|--|
| ACTION S.A. | SPECint_rate2006 = 1040 |
| ACTINA SOLAR 222 S6 (Intel Xeon E5-2650 v4, 2.20 GHz) | SPECint_rate_base2006 = 991 |
| CPU2006 license: 9008 | Test date: Jul-2016 |
| Test sponsor: ACTION S.A. | Hardware Availability: Mar-2016 |
| Tested by: ACTION S.A. | Software Availability: Mar-2016 |

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 9 17:03:26 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 August 2016.