



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp®_rate2006 = 630

Huawei 5288 V3(Intel Xeon E5-2630L v4)

SPECfp_rate_base2006 = 616

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

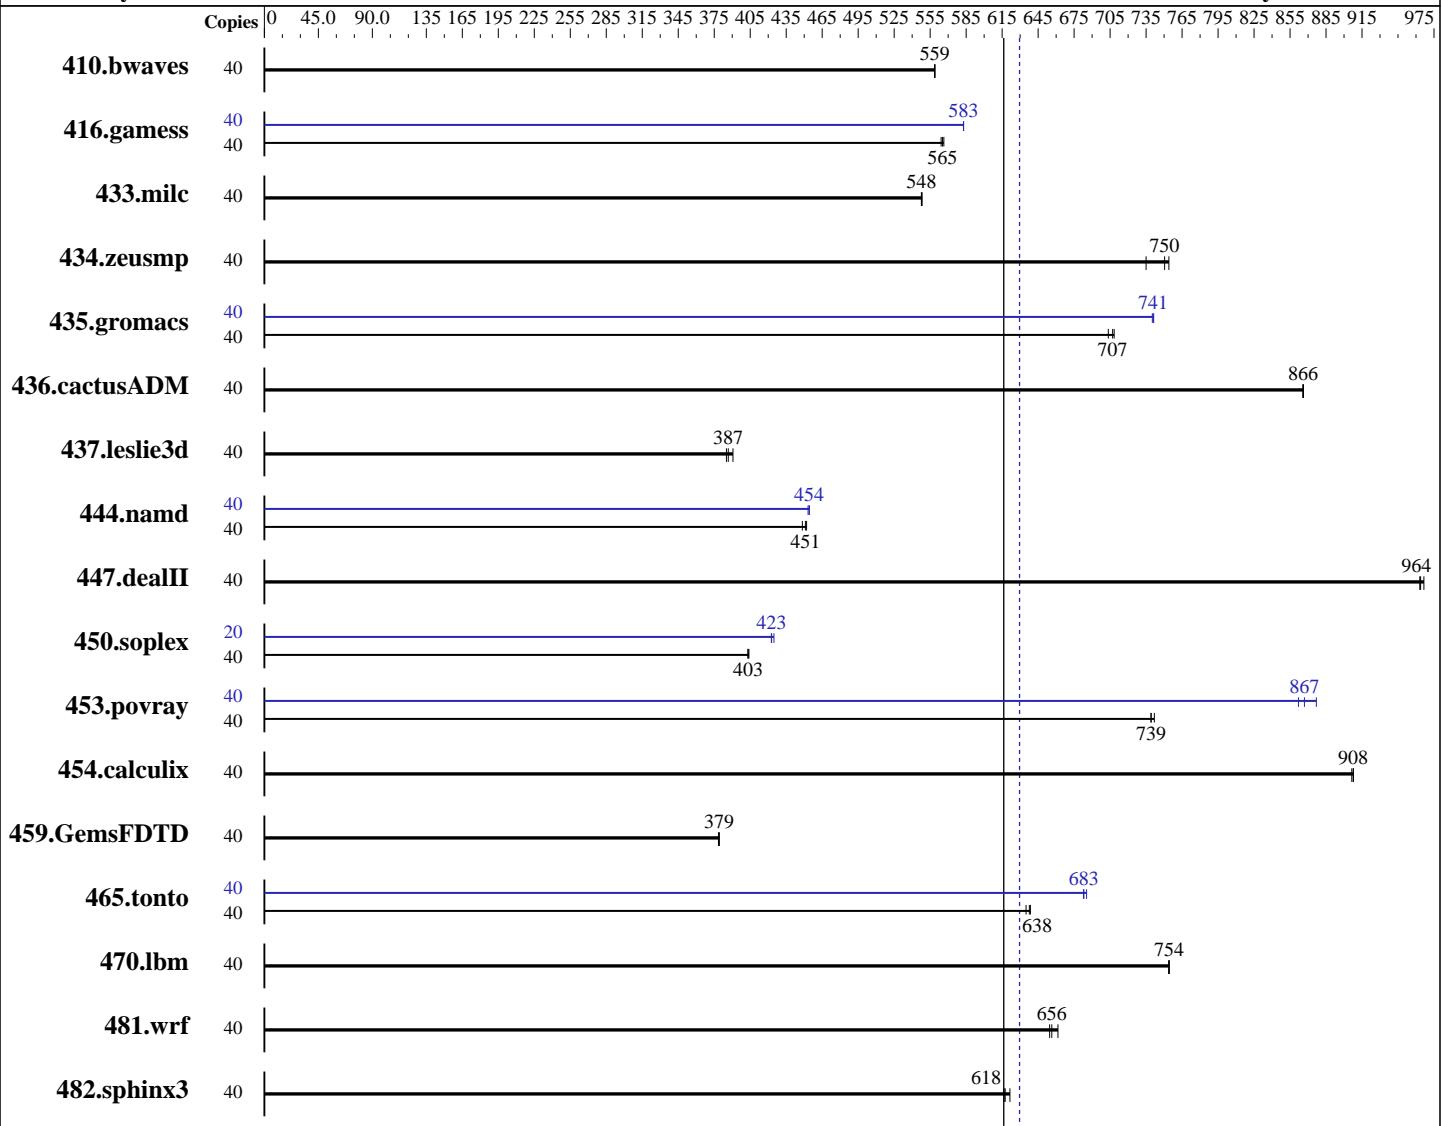

SPECfp_rate_base2006 = 616

SPECfp_rate2006 = 630

Hardware

CPU Name: Intel Xeon E5-2630L v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 630

Huawei 5288 V3(Intel Xeon E5-2630L v4)

SPECfp_rate_base2006 = 616

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	973	559	972	559	973	559	40	973	559	972	559	973	559
416.gamess	40	1386	565	1388	564	1383	566	40	1344	583	1344	583	1344	583
433.milc	40	670	548	670	548	670	548	40	670	548	670	548	670	548
434.zeusmp	40	483	754	485	750	495	735	40	483	754	485	750	495	735
435.gromacs	40	403	708	406	703	404	707	40	386	740	385	741	385	741
436.cactusADM	40	552	866	552	866	552	866	40	552	866	552	866	552	866
437.leslie3d	40	976	385	963	391	972	387	40	976	385	963	391	972	387
444.namd	40	715	448	711	451	710	452	40	708	453	706	454	706	454
447.dealII	40	475	963	475	964	473	967	40	475	963	475	964	473	967
450.soplex	40	828	403	827	403	826	404	20	395	423	393	425	394	423
453.povray	40	287	742	288	739	288	739	40	245	867	247	862	243	877
454.calculix	40	364	906	364	908	364	908	40	364	906	364	908	364	908
459.GemsFDTD	40	1121	379	1120	379	1119	379	40	1121	379	1120	379	1119	379
465.tonto	40	616	639	620	635	617	638	40	574	685	576	683	576	683
470.lbm	40	729	754	729	754	729	754	40	729	754	729	754	729	754
481.wrf	40	675	662	681	656	683	655	40	675	662	681	656	683	655
482.sphinx3	40	1262	618	1254	621	1264	617	40	1262	618	1254	621	1264	617

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Snoop Mode to ES mode

Set Patrol Scrub to Disable

Sysinfo program /spec16/config/sysinfo.rev6914

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 630

Huawei 5288 V3(Intel Xeon E5-2630L v4)

SPECfp_rate_base2006 = 616

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

Platform Notes (Continued)

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-jorn Sun Nov 6 20:35:48 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2630L v4 @ 1.80GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 10
    siblings : 20
    physical 0: cores 0 1 2 3 4 8 9 10 11 12
    physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
    MemTotal:       264061280 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 1
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
    Linux linux-jorn 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
    (8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 3 09:25
```

```
SPEC is set to: /spec16
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei 5288 V3(Intel Xeon E5-2630L v4)

SPECfp_rate2006 = 630

SPECfp_rate_base2006 = 616

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	884G	82G	801G	10%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 3.31 08/22/2016

Memory:

16x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec16/libs/32:/spec16/libs/64:/spec16/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 630

Huawei 5288 V3(Intel Xeon E5-2630L v4)

SPECfp_rate_base2006 = 616

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

Base Portability Flags (Continued)

```
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei 5288 V3(Intel Xeon E5-2630L v4)

SPECfp_rate2006 = 630

SPECfp_rate_base2006 = 616

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
  450.soplex: -D_FILE_OFFSET_BITS=64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei 5288 V3(Intel Xeon E5-2630L v4)

SPECfp_rate2006 = 630

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 630

Huawei 5288 V3(Intel Xeon E5-2630L v4)

SPECfp_rate_base2006 = 616

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 30 10:47:19 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 November 2016.