



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 7660

PRIMEQUEST 2800E3, Intel Xeon E7-8894 v4, 2.40GHz

SPECint_rate_base2006 = 7390

CPU2006 license: 19


Test date: Feb-2017

Test sponsor: Fujitsu

Hardware Availability: Feb-2017

Tested by: Fujitsu

Software Availability: Nov-2016

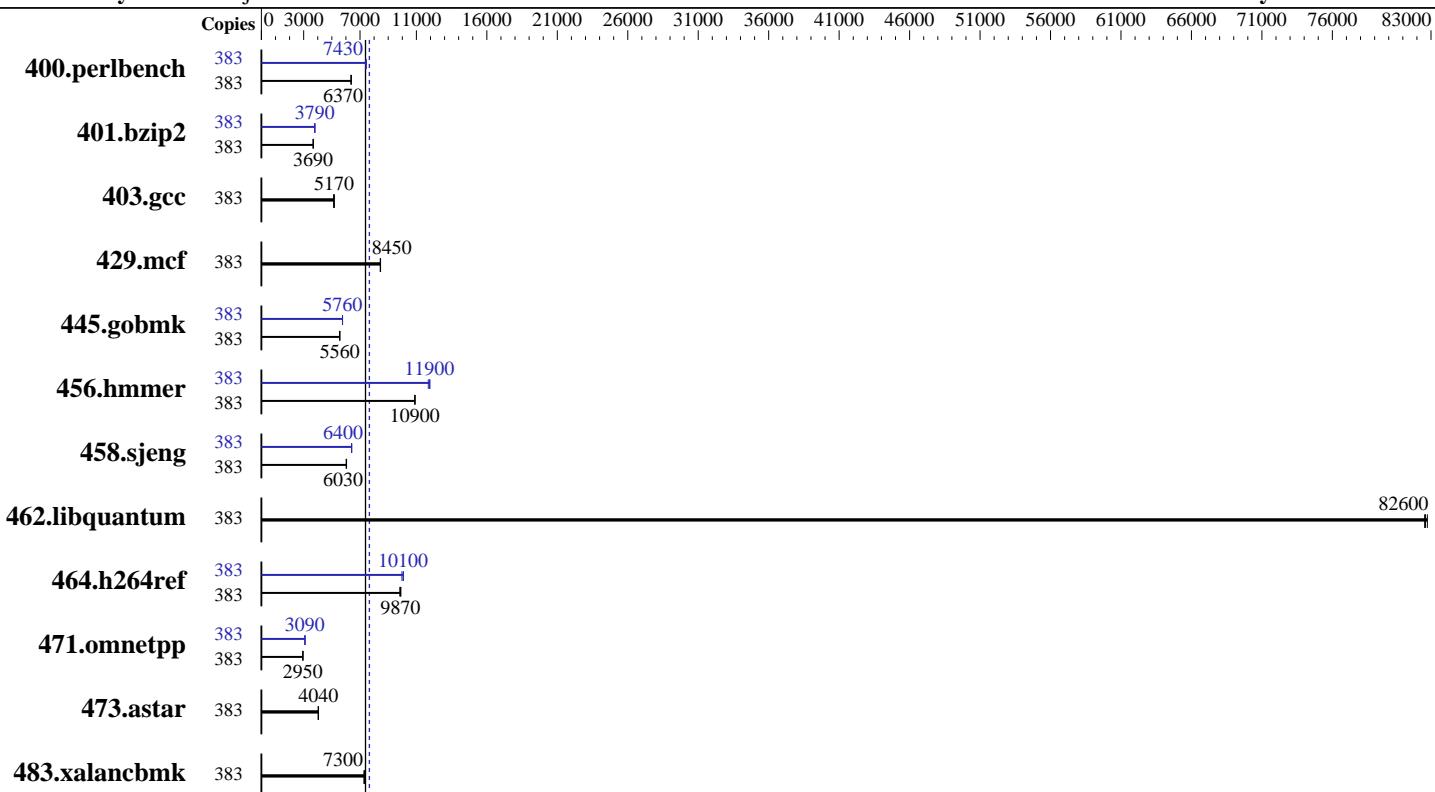

SPECint_rate_base2006 = 7390

SPECint_rate2006 = 7660

Hardware

CPU Name: Intel Xeon E7-8894 v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 192 cores, 8 chips, 24 cores/chip, 2 threads/core
CPU(s) orderable: 2,4,6,8 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 60 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2400T-R, running at 1600 MHz)
Disk Subsystem: 2014 GB tmpfs
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-68-default
Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel: No
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8894 v4, 2.40GHz

SPECint_rate2006 = 7660

SPECint_rate_base2006 = 7390

CPU2006 license: 19

Test date: Feb-2017

Test sponsor: Fujitsu

Hardware Availability: Feb-2017

Tested by: Fujitsu

Software Availability: Nov-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	383	588	6370	587	6370	587	6370	383	504	7430	504	7430	503	7430
401.bzip2	383	1002	3690	1003	3690	1008	3670	383	976	3790	973	3800	975	3790
403.gcc	383	597	5170	601	5130	597	5170	383	597	5170	601	5130	597	5170
429.mcf	383	414	8450	414	8440	413	8460	383	414	8450	414	8440	413	8460
445.gobmk	383	723	5560	722	5560	723	5560	383	698	5760	698	5750	698	5760
456.hammer	383	328	10900	328	10900	328	10900	383	299	11900	302	11800	299	12000
458.sjeng	383	769	6030	769	6030	767	6040	383	723	6410	724	6400	724	6400
462.libquantum	383	96.1	82500	96.1	82600	95.9	82700	383	96.1	82500	96.1	82600	95.9	82700
464.h264ref	383	859	9870	856	9900	863	9820	383	843	10100	850	9970	840	10100
471.omnetpp	383	812	2950	813	2940	813	2950	383	774	3090	774	3090	774	3090
473.astar	383	665	4040	665	4040	666	4040	383	665	4040	665	4040	666	4040
483.xalancbmk	383	360	7330	362	7300	363	7290	383	360	7330	362	7300	363	7290

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-383 isolcpus=1-383
Turbo mode set with :
cpupower -c all frequency-set -g performance
Tmpfs filesystem can be set with:
mkdir /home/memory
mount -t tmpfs -o size=2014g,rw tmpfs /home/memory
Process tunning setting:
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
cpu idle state set with:
cpupower idle-set -d 2
cpupower idle-set -d 3
cpupower idle-set -d 4
```

Platform Notes

BIOS configuration:
Energy Performance = Performance
Uncore Frequency Override = Enabled

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8894 v4, 2.40GHz

SPECint_rate2006 = 7660

SPECint_rate_base2006 = 7390

CPU2006 license: 19

Test date: Feb-2017

Test sponsor: Fujitsu

Hardware Availability: Feb-2017

Tested by: Fujitsu

Software Availability: Nov-2016

Platform Notes (Continued)

Intel Virtualization Technology = Disabled
QPI Link Frequency Select = 9.6 GT/s
Memory Power States = Performance Mode
Patrol Scrub = Disabled
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-i7dt Mon Feb 13 05:32:18 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8894 v4 @ 2.40GHz
  8 "physical id"s (chips)
  384 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 4: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 5: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 6: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 7: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
cache size : 61440 KB
```

```
From /proc/meminfo
MemTotal:      1056346020 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8894 v4, 2.40GHz

SPECint_rate2006 = 7660

SPECint_rate_base2006 = 7390

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2017

Hardware Availability: Feb-2017

Software Availability: Nov-2016

Platform Notes (Continued)

```
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.

os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-i7dt 4.4.21-68-default #1 SMP Tue Oct 18 18:19:37 UTC 2016
(63cf368) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 9 07:19

SPEC is set to: /home/memory/speccpu
Filesystem      Type   Size  Used Avail Use% Mounted on
tmpfs          tmpfs   2.0T  5.3G  2.0T   1% /home/memory
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU PRIMEQUEST 2000 Series BIOS Version 01.29 10/31/2016
Memory:
 64x Hynix HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at 1600 MHz
 128x Not Specified Not Specified

(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/memory/speccpu/libs/32:/home/memory/speccpu/libs/64:/home/memory/speccpu/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8894 v4, 2.40GHz

SPECint_rate2006 = 7660

SPECint_rate_base2006 = 7390

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2017

Hardware Availability: Feb-2017

Software Availability: Nov-2016

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -D_FILE_OFFSET_BITS=64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmr: -D_FILE_OFFSET_BITS=64

458.sjeng: -D_FILE_OFFSET_BITS=64

462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

464.h264ref: -D_FILE_OFFSET_BITS=64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -D_FILE_OFFSET_BITS=64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8894 v4, 2.40GHz

SPECint_rate2006 = 7660

SPECint_rate_base2006 = 7390

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2017

Hardware Availability: Feb-2017

Software Availability: Nov-2016

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-D_FILE_OFFSET_BITS=64`

429.mcf: `-D_FILE_OFFSET_BITS=64`

445.gobmk: `-D_FILE_OFFSET_BITS=64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

464.h264ref: `-D_FILE_OFFSET_BITS=64`

471.omnetpp: `-D_FILE_OFFSET_BITS=64`

473.astar: `-D_FILE_OFFSET_BITS=64`

483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)`
`-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)`
`-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3`

401.bzip2: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)`
`-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)`
`-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32`
`-qopt-mem-layout-trans=3`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)`
`-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)`
`-no-prec-div(pass 2) -qopt-mem-layout-trans=3`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8894 v4, 2.40GHz

SPECint_rate2006 = 7660

SPECint_rate_base2006 = 7390

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2017

Hardware Availability: Feb-2017

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll14 -auto-ilp32
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll12 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)
-qopt-ra-region-strategy=block
-qopt-mem-layout-trans=3 -Wl,-z,muldefs
-L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevC.xml>



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8894 v4, 2.40GHz

SPECint_rate2006 = 7660

SPECint_rate_base2006 = 7390

CPU2006 license: 19

Test date: Feb-2017

Test sponsor: Fujitsu

Hardware Availability: Feb-2017

Tested by: Fujitsu

Software Availability: Nov-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Oct 2 16:52:56 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 March 2017.