



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp[®]2006 = **Not Run**

HPC S2600WF (Intel Xeon Silver 4112, 2.60 GHz)

SPECfp_base2006 = **96.3**

CPU2006 license: 4204


Test date: Aug-2017

Test sponsor: M Computers s.r.o.

Hardware Availability: Jul-2017

Tested by: M Computers s.r.o.

Software Availability: Apr-2017

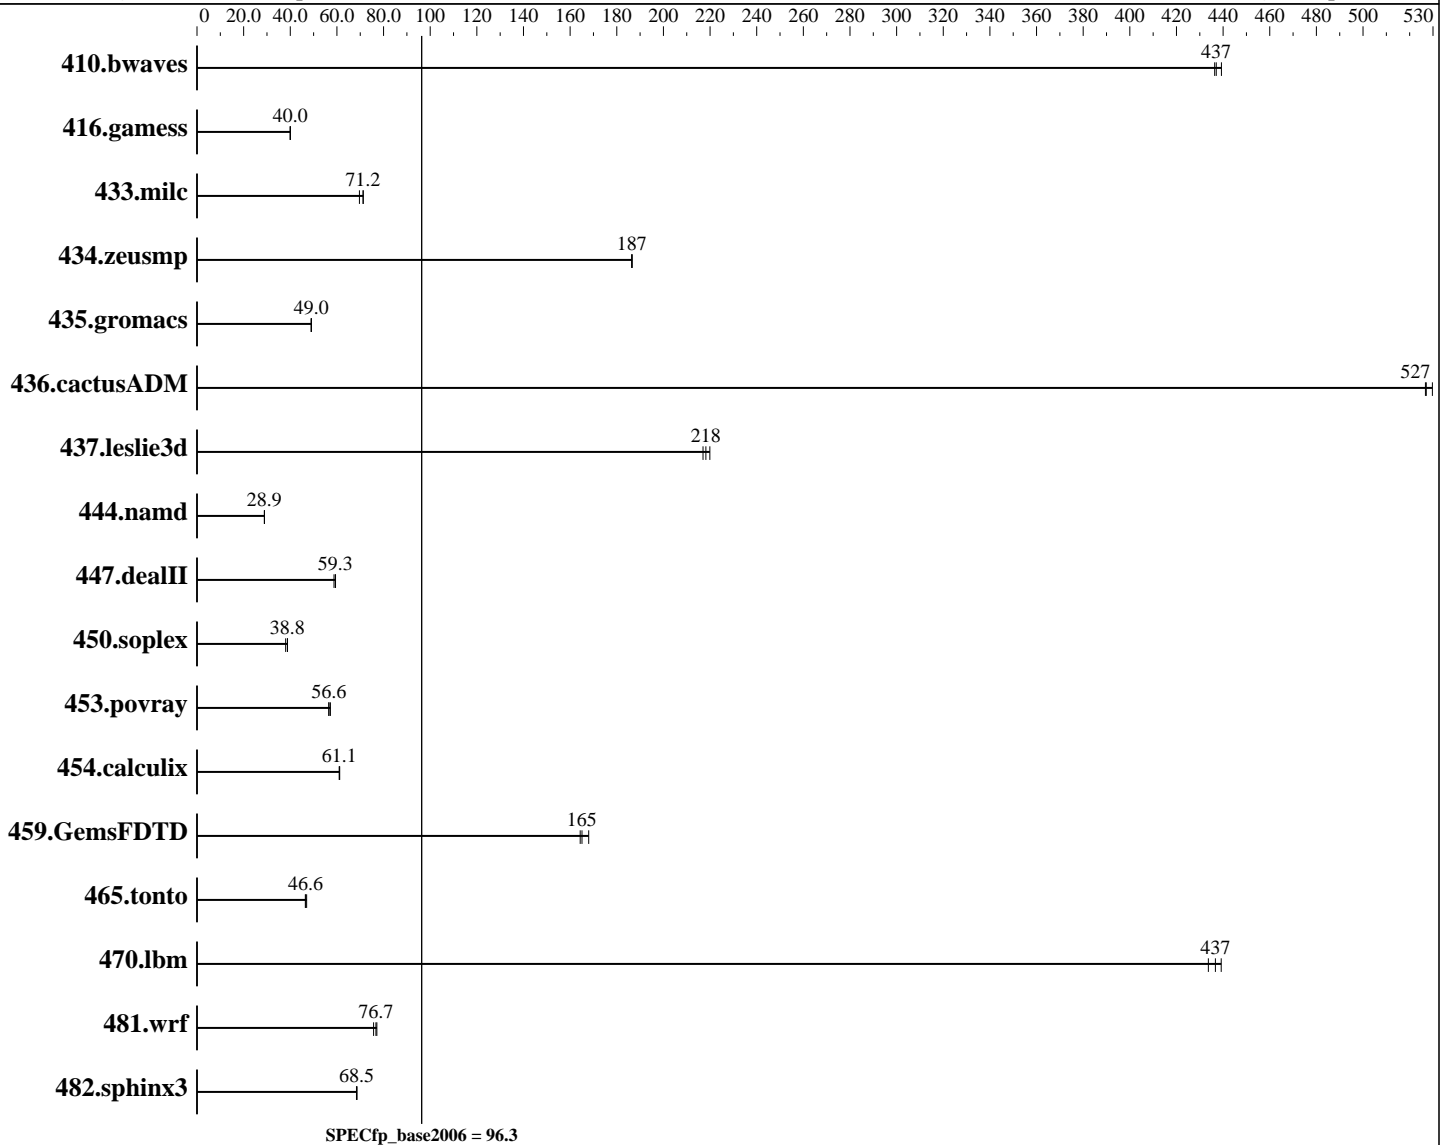

Hardware

CPU Name: Intel Xeon Silver 4112
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
 Compiler: C/C++: Version 17.0.4.196 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.4.196 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp2006 = Not Run

HPC S2600WF (Intel Xeon Silver 4112, 2.60 GHz)

SPECfp_base2006 = 96.3

CPU2006 license: 4204

Test date: Aug-2017

Test sponsor: M Computers s.r.o.

Hardware Availability: Jul-2017

Tested by: M Computers s.r.o.

Software Availability: Apr-2017

L3 Cache: 8.25 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2400V-R, running at 2400 MT/s)
Disk Subsystem: 1 x 1600 GB SATA SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	31.1	437	30.9	439	31.1	436						
416.gamess	489	40.0	490	40.0	489	40.0						
433.milc	129	71.3	129	71.2	132	69.6						
434.zeusmp	48.8	186	48.8	187	48.8	187						
435.gromacs	146	49.0	146	49.0	146	49.1						
436.cactusADM	22.7	527	22.6	530	22.7	527						
437.leslie3d	43.3	217	43.1	218	42.7	220						
444.namd	278	28.9	277	28.9	277	28.9						
447.dealII	195	58.7	193	59.4	193	59.3						
450.soplex	219	38.0	215	38.8	215	38.8						
453.povray	94.0	56.6	93.0	57.2	94.2	56.5						
454.calculix	135	61.0	135	61.2	135	61.1						
459.GemsFDTD	64.3	165	64.6	164	63.2	168						
465.tonto	209	47.0	212	46.5	211	46.6						
470.lbm	31.7	434	31.3	439	31.5	437						
481.wrf	145	77.1	146	76.7	148	75.7						
482.sphinx3	284	68.6	285	68.4	285	68.5						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Intel(R) Hyper-Threading Tech=Disabled
Patrol Scrub=Disabled
CPU and Power Performance Policy=Performance
Set Fan Profile=Performance
Sysinfo program /spec/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (300de342723409e6453f54e8c50448c3)
running on kvasir Tue Aug 22 11:09:51 2017

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp2006 = Not Run

HPC S2600WF (Intel Xeon Silver 4112, 2.60 GHz)

SPECfp_base2006 = 96.3

CPU2006 license: 4204

Test date: Aug-2017

Test sponsor: M Computers s.r.o.

Hardware Availability: Jul-2017

Tested by: M Computers s.r.o.

Software Availability: Apr-2017

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Silver 4112 CPU @ 2.60GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 4
  siblings     : 4
  physical 0   : cores 1 2 4 5
  physical 1   : cores 1 2 4 5
cache size     : 8448 KB

```

```

From /proc/meminfo
MemTotal:      394667280 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

```

uname -a:
Linux kvasir 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Aug 22 10:57

```

SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       xfs   650G  68G  583G  11% /

```

Additional information from dmidecode:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp2006 = **Not Run**

HPC S2600WF (Intel Xeon Silver 4112, 2.60 GHz)

SPECfp_base2006 = **96.3**

CPU2006 license: 4204

Test date: Aug-2017

Test sponsor: M Computers s.r.o.

Hardware Availability: Jul-2017

Tested by: M Computers s.r.o.

Software Availability: Apr-2017

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C620.86B.0X.01.0007.060920171037 06/09/2017

Memory:

1x Hynix HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz

23x Samsung M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/spec/lib/ia32:/spec/lib/intel64:/spec/sh11.2"

OMP_NUM_THREADS = "8"

Binaries compiled on a system with 2x Intel Xeon-SP 4112 CPU + 192GB RAM memory using Redhat Enterprise Linux 7.3

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp2006 = Not Run

HPC S2600WF (Intel Xeon Silver 4112, 2.60 GHz)

SPECfp_base2006 = 96.3

CPU2006 license: 4204

Test date: Aug-2017

Test sponsor: M Computers s.r.o.

Hardware Availability: Jul-2017

Tested by: M Computers s.r.o.

Software Availability: Apr-2017

Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/MComputers-Platform-Settings-V1.2-revB.20170920.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/MComputers-Platform-Settings-V1.2-revB.20170920.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 20 11:01:34 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 September 2017.