



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECspeed2017\_fp\_base = 156

SPECspeed2017\_fp\_peak = 158

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

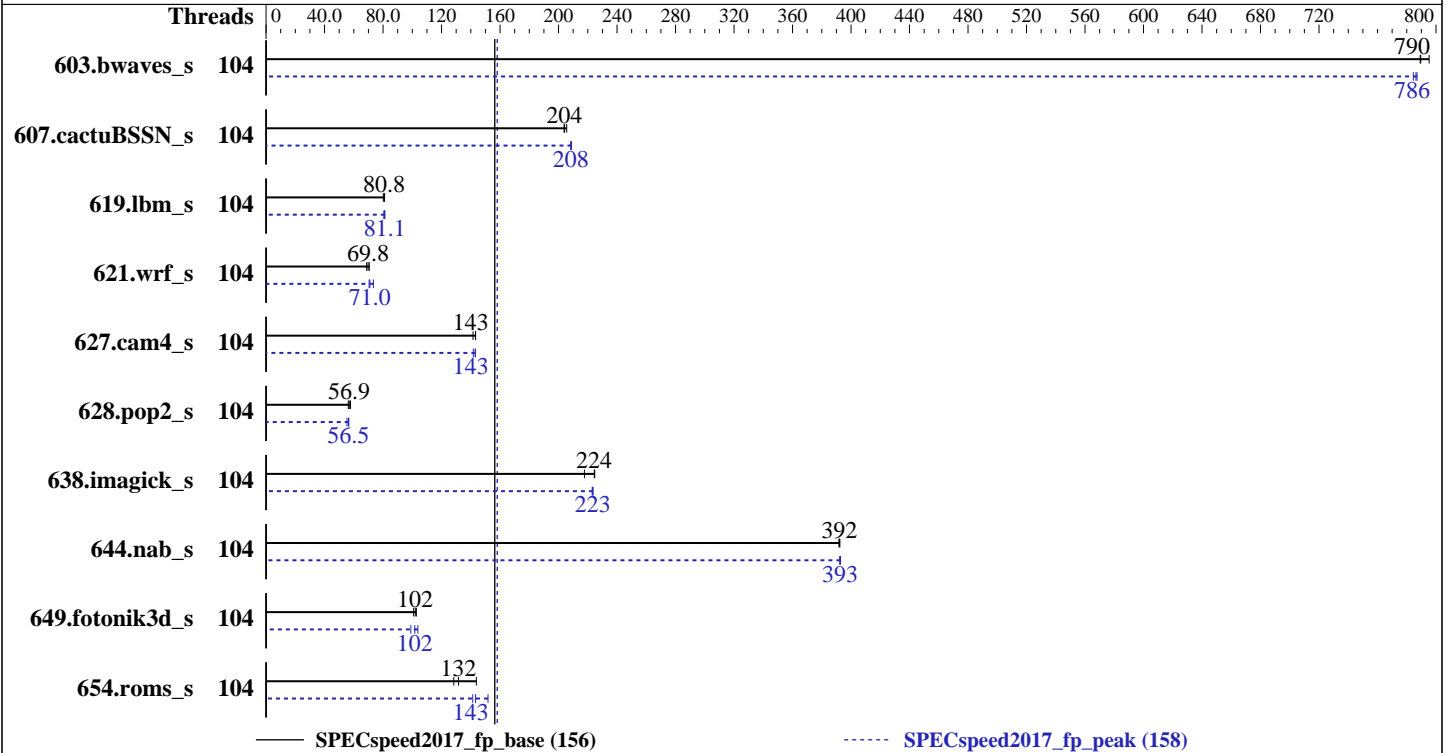

### Hardware

CPU Name: Intel Xeon Platinum 8170  
 Max MHz.: 3700  
 Nominal: 2100  
 Enabled: 104 cores, 4 chips  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 800 GB SAS SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
 Kernel 3.10.0-693.el7.x86\_64  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version TEE1171 1.10 released Oct-2017  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECSpeed2017\_fp\_base = 156

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECSpeed2017\_fp\_peak = 158

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2017  
**Hardware Availability:** Nov-2017  
**Software Availability:** Sep-2017

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	104	<b>74.7</b>	<b>790</b>	74.2	795	74.8	789	104	75.2	784	75.0	787	<b>75.0</b>	<b>786</b>
607.cactuBSSN_s	104	<b>81.7</b>	<b>204</b>	81.1	206	81.8	204	104	79.8	209	80.0	208	<b>80.0</b>	<b>208</b>
619.lbm_s	104	64.6	81.0	<b>64.8</b>	<b>80.8</b>	65.3	80.2	104	64.5	81.2	<b>64.6</b>	<b>81.1</b>	65.0	80.5
621.wrf_s	104	187	70.6	192	68.8	<b>190</b>	<b>69.8</b>	104	<b>186</b>	<b>71.0</b>	188	70.5	180	73.4
627.cam4_s	104	<b>61.9</b>	<b>143</b>	62.6	142	61.9	143	104	<b>62.0</b>	<b>143</b>	62.6	142	61.9	143
628.pop2_s	104	<b>209</b>	<b>56.9</b>	206	57.8	211	56.2	104	215	55.3	210	56.5	<b>210</b>	<b>56.5</b>
638.imagick_s	104	<b>64.3</b>	<b>224</b>	64.2	225	66.3	218	104	64.7	223	64.5	224	<b>64.6</b>	<b>223</b>
644.nab_s	104	<b>44.5</b>	<b>392</b>	44.5	392	44.6	392	104	44.5	393	<b>44.5</b>	<b>393</b>	44.5	392
649.fotonik3d_s	104	90.3	101	88.7	103	<b>89.3</b>	<b>102</b>	104	87.8	104	92.1	99.0	<b>89.6</b>	<b>102</b>
654.roms_s	104	123	128	<b>120</b>	<b>132</b>	109	144	104	104	152	111	141	<b>110</b>	<b>143</b>

SPECSpeed2017\_fp\_base = **156**

SPECSpeed2017\_fp\_peak = **158**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

## Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
Hyper-Threading set to Disable  
Adjacent Cache Prefetch set to Disable  
MONITORMWAIT set to Enable  
Per Core P-state set to Disable  
XPT Prefetcher set to Enable  
StaleAtoS set to Enable  
LLC deadline alloc set to Disable

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_fp\_base = 156

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECspeed2017\_fp\_peak = 158

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2017  
**Hardware Availability:** Nov-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on SR860 Wed Dec 13 15:21:07 2017

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
 4 "physical id"s (chips)
104 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 26
siblings : 26
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                104
On-line CPU(s) list:   0-103
Thread(s) per core:    1
Core(s) per socket:    26
Socket(s):             4
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                85
Model name:            Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
Stepping:              4
CPU MHz:               2100.000
BogoMIPS:              4200.00
Virtualization:        VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:              1024K
L3 cache:              36608K
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_fp\_base = 156

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECspeed2017\_fp\_peak = 158

CPU2017 License: 9017

Test Date: Dec-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

### Platform Notes (Continued)

NUMA node0 CPU(s): 0-25  
NUMA node1 CPU(s): 26-51  
NUMA node2 CPU(s): 52-77  
NUMA node3 CPU(s): 78-103

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch epb cat\_l3 cdp\_l3 intel\_pt tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts

/proc/cpuinfo cache data  
cache size : 36608 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25  
node 0 size: 196285 MB  
node 0 free: 191674 MB  
node 1 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51  
node 1 size: 196608 MB  
node 1 free: 192147 MB  
node 2 cpus: 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77  
node 2 size: 196608 MB  
node 2 free: 192179 MB  
node 3 cpus: 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103  
node 3 size: 196608 MB  
node 3 free: 192108 MB  
node distances:  
node 0 1 2 3  
0: 10 21 21 31  
1: 21 10 31 21  
2: 21 31 10 21  
3: 31 21 21 10

From /proc/meminfo  
MemTotal: 792255244 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECspeed2017\_fp\_base = 156

SPECspeed2017\_fp\_peak = 158

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2017  
**Hardware Availability:** Nov-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

uname -a:
Linux SR860 3.10.0-693.el7.x86_64 #1 SMP Thu Jul 6 19:56:57 EDT 2017 x86_64 x86_64
x86_64 GNU/Linux

run-level 3 Dec 13 15:20

SPEC is set to: /home/cpu2017.1.0.2.ic18.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   686G  202G  485G  30% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS Lenovo -[TEE117I-1.10]- 10/19/2017
  Memory:
    48x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

```

### Compiler Version Notes

```

=====
CC  619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
CC  619.lbm_s(peak)

```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECspeed2017\_fp\_base = 156

SPECspeed2017\_fp\_peak = 158

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2017  
**Hardware Availability:** Nov-2017  
**Software Availability:** Sep-2017

### Compiler Version Notes (Continued)

-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====

```
FC 607.cactuBSSN_s(base)
```

-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====

```
FC 607.cactuBSSN_s(peak)
```

-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====

```
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
```

-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====

```
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)
```

-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====

```
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)
```

-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
-----

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed2017\_fp\_base = 156

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECspeed2017\_fp\_peak = 158

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2017  
**Hardware Availability:** Nov-2017  
**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 621.wrf\_s(peak) 628.pop2\_s(peak)  
=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

-assume byterecl

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECspeed2017\_fp\_base = 156

SPECspeed2017\_fp\_peak = 158

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Sep-2017

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

Fortran benchmarks:

```
ifort
```

(Continued on next page)





# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017\_fp\_base = 156

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECspeed2017\_fp\_peak = 158

CPU2017 License: 9017

Test Date: Dec-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP
```

```
638.imagick_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP
```

644.nab\_s: Same as 638.imagick\_s

Fortran benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp  
-nonstandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -nonstandard-realloc-lhs -align array32byte
```

```
627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP -nonstandard-realloc-lhs -align array32byte
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017\_fp\_base = 156

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECspeed2017\_fp\_peak = 158

CPU2017 License: 9017

Test Date: Dec-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512 -qopt-prefetch  
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs  
-align array32byte
```

## Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-12-13 02:21:07-0500.

Report generated on 2018-10-31 17:05:44 by CPU2017 PDF formatter v6067.

Originally published on 2018-01-10.