



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E9(KNPP-D32) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_fp_base = 267

SPECrate2017_fp_peak = 278

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2018

Hardware Availability: Jul-2018

Software Availability: Feb-2018

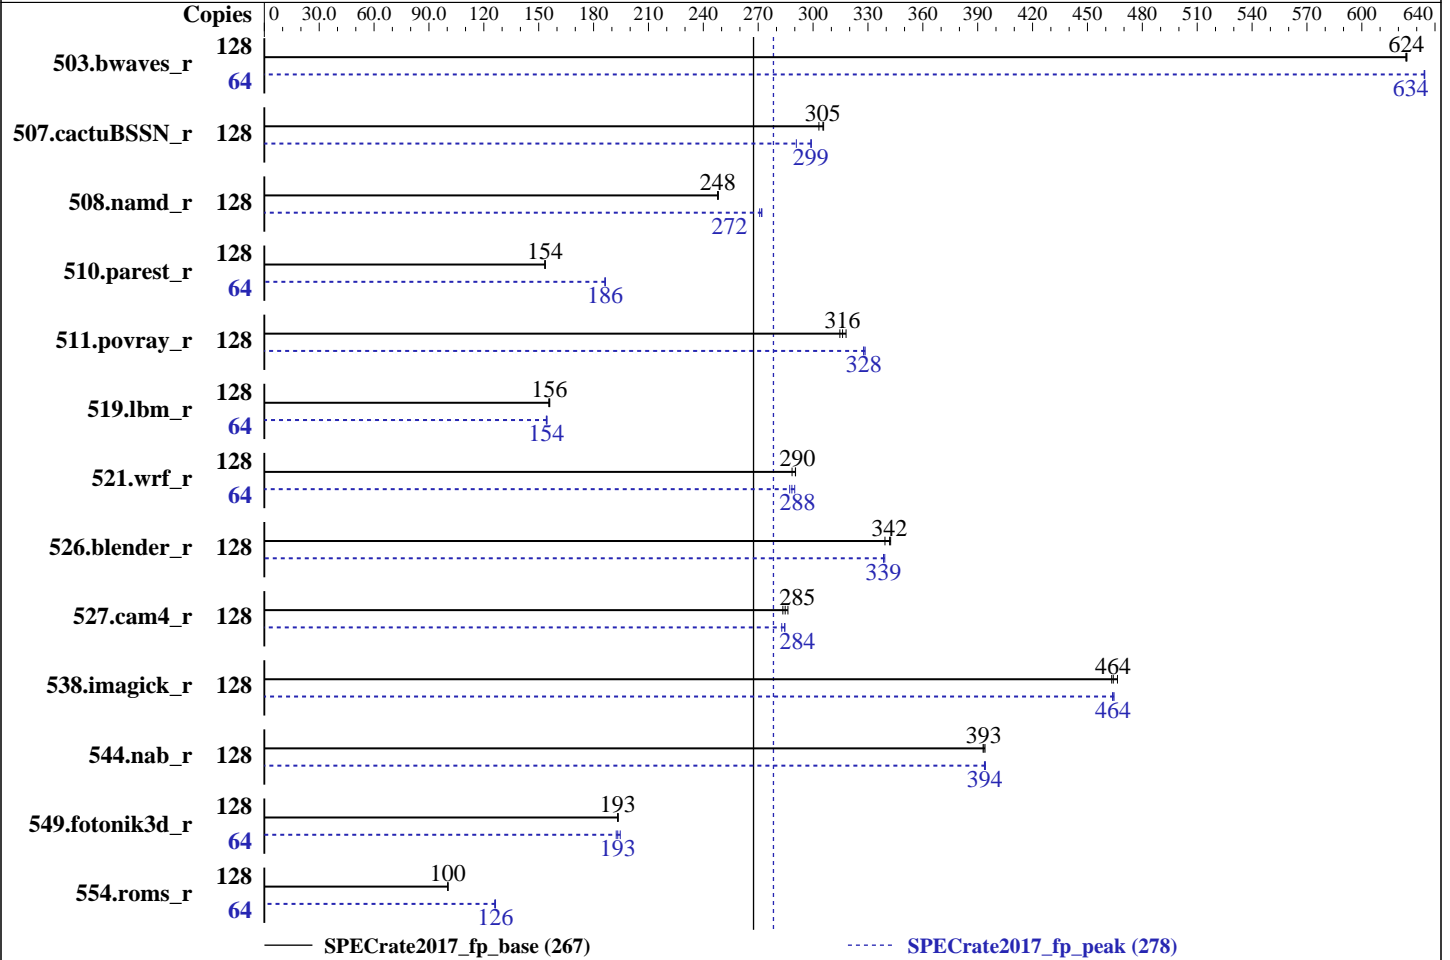

Hardware

CPU Name: AMD EPYC 7601
 Max MHz.: 3200
 Nominal: 2200
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2667V-L)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP3
 Kernel 4.4.114-94.11-default
 Compiler: C/C++: Version 1.0.0 of AOCC
 Fortran: Version 4.8.2 of GCC
 Parallel: No
 Firmware: Version 0902 released Jul-2018
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc general purpose malloc implementation V4.5.0



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E9(KNPP-D32) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_fp_base = 267

SPECrate2017_fp_peak = 278

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2018

Hardware Availability: Jul-2018

Software Availability: Feb-2018

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	2057	624	2056	624	2055	625	64	1012	634	1012	634	1012	634
507.cactuBSSN_r	128	531	305	534	303	530	306	128	542	299	542	299	557	291
508.namd_r	128	490	248	491	248	490	248	128	449	271	447	272	447	272
510.parest_r	128	2181	154	2180	154	2184	153	64	899	186	899	186	898	186
511.povray_r	128	945	316	940	318	950	315	128	912	328	912	328	910	328
519.lbm_r	128	865	156	868	155	865	156	64	437	154	438	154	436	155
521.wrf_r	128	994	289	987	290	988	290	64	497	288	499	287	494	290
526.blender_r	128	575	339	570	342	569	342	128	575	339	576	339	576	339
527.cam4_r	128	786	285	790	283	782	286	128	787	284	787	285	791	283
538.imagick_r	128	687	463	686	464	683	466	128	685	465	687	464	686	464
544.nab_r	128	547	394	548	393	548	393	128	547	394	547	394	547	394
549.fotonik3d_r	128	2581	193	2583	193	2578	193	64	1282	195	1296	192	1291	193
554.roms_r	128	2029	100	2025	100	2027	100	64	808	126	805	126	805	126

SPECrate2017_fp_base = 267

SPECrate2017_fp_peak = 278

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E9(KNPP-D32) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_fp_base = 267

SPECrate2017_fp_peak = 278

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2018

Hardware Availability: Jul-2018

Software Availability: Feb-2018

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/spec2017amd/amd1704-rate-libs-revC/64;/spec2017amd/amd1704-rate-libs-revC/32:"  
MALLOC_CONF = "lg_chunk:28"
```

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.
jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
narenas: sets the maximum number of arenas to use for automatic multiplexing
of threads and arenas.
lg_chunk: set the virtual memory chunk size (log base 2). For example,
lg_chunk:21 sets the default chunk size to $2^{21} = 2\text{MiB}$.

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers
with gfortran. It is available here:
<http://developer.amd.com/amd-aocc/>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

Determinism Slider = Power

cTDP Control = Manual

cTDP = 200

Sysinfo program /spec2017amd/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-pmm5 Tue Aug 7 11:30:52 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E9(KNPP-D32) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_fp_base = 267

SPECrate2017_fp_peak = 278

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2018

Hardware Availability: Jul-2018

Software Availability: Feb-2018

Platform Notes (Continued)

model name : AMD EPYC 7601 32-Core Processor

2 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 32

siblings : 64

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 128

On-line CPU(s) list: 0-127

Thread(s) per core: 2

Core(s) per socket: 32

Socket(s): 2

NUMA node(s): 8

Vendor ID: AuthenticAMD

CPU family: 23

Model: 1

Model name: AMD EPYC 7601 32-Core Processor

Stepping: 2

CPU MHz: 2200.000

CPU max MHz: 2200.0000

CPU min MHz: 1200.0000

BogoMIPS: 4399.97

Virtualization: AMD-V

L1d cache: 32K

L1i cache: 64K

L2 cache: 512K

L3 cache: 8192K

NUMA node0 CPU(s): 0-7,64-71

NUMA node1 CPU(s): 8-15,72-79

NUMA node2 CPU(s): 16-23,80-87

NUMA node3 CPU(s): 24-31,88-95

NUMA node4 CPU(s): 32-39,96-103

NUMA node5 CPU(s): 40-47,104-111

NUMA node6 CPU(s): 48-55,112-119

NUMA node7 CPU(s): 56-63,120-127

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov

pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm

constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E9(KNPP-D32) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_fp_base = 267

SPECrate2017_fp_peak = 278

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2018

Hardware Availability: Jul-2018

Software Availability: Feb-2018

Platform Notes (Continued)

pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
ibpb overflow_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 128825 MB
node 0 free: 128642 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 129021 MB
node 1 free: 128864 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 129021 MB
node 2 free: 128820 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 129021 MB
node 3 free: 128856 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 129021 MB
node 4 free: 128899 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 129021 MB
node 5 free: 128904 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 129021 MB
node 6 free: 128886 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 116923 MB
node 7 free: 116807 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  16  16  16  32  32  32  32
  1:  16  10  16  16  32  32  32  32
  2:  16  16  10  16  32  32  32  32
  3:  16  16  16  10  32  32  32  32
  4:  32  32  32  32  10  16  16  16
  5:  32  32  32  32  16  10  16  16
  6:  32  32  32  32  16  16  10  16
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E9(KNPP-D32) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_fp_base = 267

SPECrate2017_fp_peak = 278

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2018

Hardware Availability: Jul-2018

Software Availability: Feb-2018

Platform Notes (Continued)

7: 32 32 32 32 16 16 16 10

From /proc/meminfo

MemTotal: 1044353268 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 3

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

VERSION_ID="12.3"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-pmm5 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 7 11:30

SPEC is set to: /spec2017amd

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	873G	16G	857G	2%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0902 07/19/2018

Memory:

16x Micron Technology 72ASS8G72LZ-2G6B2 64 GB 4 rank 2666

16x Unknown Unknown

(End of data from sysinfo program)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E9(KNPP-D32) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_fp_base = 267

SPECrate2017_fp_peak = 278

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2018

Hardware Availability: Jul-2018

Software Availability: Feb-2018

Compiler Version Notes

=====
CC 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CC 511.povray_r(base, peak) 526.blender_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
FC 507.cactuBSSN_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E9(KNPP-D32) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_fp_base = 267

SPECrate2017_fp_peak = 278

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2018

Hardware Availability: Jul-2018

Software Availability: Feb-2018

Compiler Version Notes (Continued)

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====
CC 521.wrf_r(base, peak) 527.cam4_r(base, peak)

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E9(KNPP-D32) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_fp_base = 267

SPECrate2017_fp_peak = 278

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2018

Hardware Availability: Jul-2018

Software Availability: Feb-2018

Base Compiler Invocation (Continued)

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64

526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64

527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop

-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2

-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2

-inline-threshold=1000 -z muldefs -ljemalloc

C++ benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop

-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100

-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs

-ljemalloc

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E9(KNPP-D32) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_fp_base = 267

SPECrate2017_fp_peak = 278

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2018

Hardware Availability: Jul-2018

Software Availability: Feb-2018

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -mavx -madx -funroll-loops -ffast-math
-z muldefs -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-disable-vect-cmp" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -mavx -madx -funroll-loops -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-disable-vect-cmp" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -finline-aggressive -z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -finline-aggressive -mavx -madx -funroll-loops
-z muldefs -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-disable-vect-cmp" -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E9(KNPP-D32) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_fp_base = 267

SPECrate2017_fp_peak = 278

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2018

Hardware Availability: Jul-2018

Software Availability: Feb-2018

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000
-ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast
-march=znver1 -finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -O3
-mavx2 -madox -funroll-loops -ffast-math -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -inline-threshold:1000" -ljemalloc
-lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -O3 -mavx -ffast-math -funroll-loops
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

```
527.cam4_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -O3 -mavx2 -madox -funroll-loops
-ffast-math -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E9(KNPP-D32) Server System
(2.20 GHz, AMD EPYC 7601)

SPECrate2017_fp_base = 267

SPECrate2017_fp_peak = 278

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Aug-2018

Hardware Availability: Jul-2018

Software Availability: Feb-2018

Peak Optimization Flags (Continued)

527.cam4_r (continued):

```
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast  
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-finline-aggressive -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast  
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-finline-aggressive -O3 -mavx2 -madox -funroll-loops -ffast-math  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="  
-inline-threshold:1000" -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-z11-V2.0-revA.html>
<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>
<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-z11-V2.0-revA.xml>
<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>
<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-08-06 23:30:51-0400.

Report generated on 2019-02-21 18:17:57 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-18.