



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L,  
2.70GHz

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = 357

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

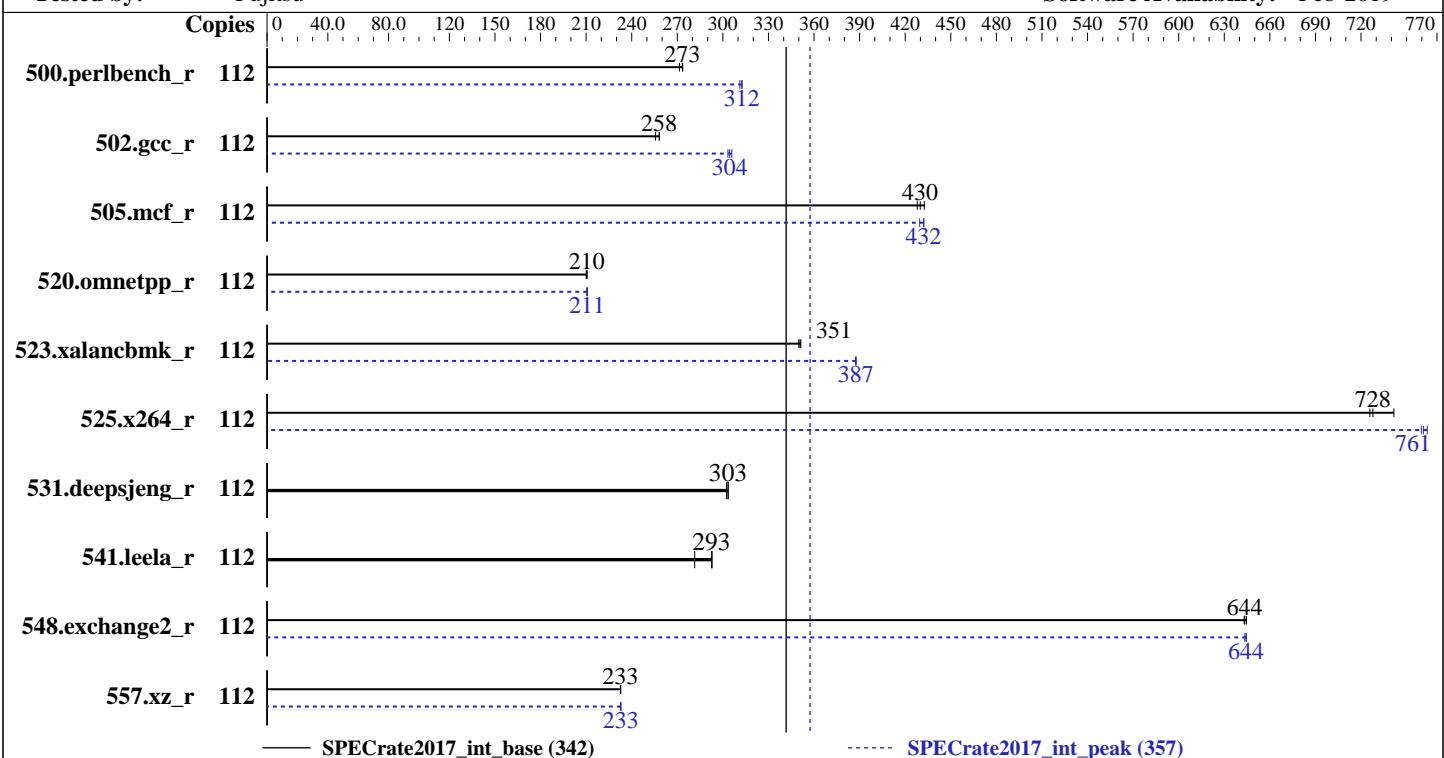

— SPECrate2017\_int\_base (342)

----- SPECrate2017\_int\_peak (357)

## Hardware

CPU Name: Intel Xeon Platinum 8280L  
Max MHz.: 4000  
Nominal: 2700  
Enabled: 56 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 38.5 MB I+D on chip per chip  
Other: None  
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x SATA M.2 SSD, 240GB  
Other: None

## Software

OS: SUSE Linux Enterprise Server 15  
Compiler: 4.12.14-25.28-default  
Compiler: C/C++: Version 19.0.1.144 of Intel C/C++  
Compiler Build for Linux;  
Fortran: Version 19.0.1.144 of Intel Fortran  
Compiler Build for Linux  
Parallel: No  
Firmware:  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Fujitsu BIOS Version V5.0.0.14 R1.8.0 for D3383-B1x. Released Jun-2019 tested as V5.0.0.14 R1.2.0 for D3383-B1x Feb-2019



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L,  
2.70GHz

**SPECrate2017\_int\_base = 342**

**SPECrate2017\_int\_peak = 357**

CPU2017 License: 19

Test Date: Mar-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	<b>652</b>	<b>273</b>	652	274	657	271	112	<b>573</b>	<b>311</b>	570	313	<b>571</b>	<b>312</b>
502.gcc_r	112	614	258	620	256	<b>614</b>	<b>258</b>	112	<b>523</b>	<b>303</b>	<b>521</b>	<b>304</b>	518	306
505.mcf_r	112	<b>421</b>	<b>430</b>	423	428	418	433	112	<b>421</b>	<b>430</b>	<b>419</b>	<b>432</b>	419	432
520.omnetpp_r	112	698	211	700	210	<b>698</b>	<b>210</b>	112	697	211	<b>698</b>	<b>211</b>	698	210
523.xalancbmk_r	112	337	351	338	350	<b>337</b>	<b>351</b>	112	<b>305</b>	<b>387</b>	305	388	305	387
525.x264_r	112	<b>269</b>	<b>728</b>	270	726	264	742	112	258	760	<b>258</b>	<b>761</b>	257	764
531.deepsjeng_r	112	424	302	<b>423</b>	<b>303</b>	423	303	112	424	302	<b>423</b>	<b>303</b>	423	303
541.leela_r	112	659	281	<b>634</b>	<b>293</b>	633	293	112	659	281	<b>634</b>	<b>293</b>	633	293
548.exchange2_r	112	<b>456</b>	<b>644</b>	455	645	456	643	112	456	644	<b>455</b>	<b>644</b>	455	644
557.xz_r	112	520	233	<b>520</b>	<b>233</b>	520	233	112	<b>520</b>	<b>233</b>	520	233	519	233

**SPECrate2017\_int\_base = 342**

**SPECrate2017\_int\_peak = 357**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-111

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-1.0.5/lib/ia32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-1.0.5/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-1.0.5/je5.0.1-32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-1.0.5/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L,  
2.70GHz

SPECCrate2017\_int\_base = 342

SPECCrate2017\_int\_peak = 357

CPU2017 License: 19

Test Date: Mar-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

## General Notes (Continued)

jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
jemalloc: sources available via jemalloc.net

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Patrol Scrub = Disabled

DCU Ip Prefetcher = Disabled

DCU Streamer Prefetcher = Disabled

Fan Control = Full

Stale AtoS = Enable

WR CRC feature Control = Disabled

Sysinfo program /home/Benchmark/speccpu2017-1.0.5/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on RX2530M5 Fri Mar 15 00:01:10 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8280L CPU @ 2.70GHz

2 "physical id"s (chips)

112 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 28

siblings : 56

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 112

On-line CPU(s) list: 0-111

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L,  
2.70GHz

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = 357

CPU2017 License: 19

Test Date: Mar-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

## Platform Notes (Continued)

Thread(s) per core: 2  
Core(s) per socket: 28  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Platinum 8280L CPU @ 2.70GHz  
Stepping: 6  
CPU MHz: 2700.000  
CPU max MHz: 4000.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 5400.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 39424K  
NUMA node0 CPU(s): 0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79  
NUMA node1 CPU(s): 4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83  
NUMA node2 CPU(s): 28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107  
NUMA node3 CPU(s): 32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req pku ospke avx512\_vnni flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 39424 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78 79  
node 0 size: 191966 MB  
node 0 free: 191520 MB  
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81 82 83

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L,  
2.70GHz

SPECCrate2017\_int\_base = 342

SPECCrate2017\_int\_peak = 357

CPU2017 License: 19

Test Date: Mar-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

## Platform Notes (Continued)

```
node 1 size: 193501 MB
node 1 free: 193212 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100
101 105 106 107
node 2 size: 193530 MB
node 2 free: 193122 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
108 109 110 111
node 3 size: 193318 MB
node 3 free: 192994 MB
node distances:
node   0   1   2   3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10
```

From /proc/meminfo

```
MemTotal:      790851788 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="SLES"
  VERSION="15"
  VERSION_ID="15"
  PRETTY_NAME="SUSE Linux Enterprise Server 15"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15"
```

uname -a:

```
Linux RX2530M5 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling
```

run-level 3 Mar 14 23:59

SPEC is set to: /home/Benchmark/speccpu2017-1.0.5

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L,  
2.70GHz

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = 357

CPU2017 License: 19

Test Date: Mar-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda5	xfs	191G	62G	130G	33%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. v5.0.0.14 R1.2.0 for D3383-B1x  
02/28/2019

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)

## Compiler Version Notes

=====

CC 502.gcc\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

CC 500.perlbench\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

CXXC 523.xalancbmk\_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.1.144 Build 20181018

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L,  
2.70GHz

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = 357

CPU2017 License: 19

Test Date: Mar-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

## Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CXXC 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base, peak)

=====  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 548.exchange2\_r(base, peak)

=====  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L,  
2.70GHz

**SPECrate2017\_int\_base = 342**

**SPECrate2017\_int\_peak = 357**

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

502.gcc\_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.1.144/linux/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

```
icpc -m64
```

523.xalancbmk\_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.1.144/linux/compiler/lib/ia32\_lin

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L,  
2.70GHz

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = 357

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Peak Portability Flags (Continued)

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: basepeak = yes

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L,  
2.70GHz

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = 357

CPU2017 License: 19

Test Date: Mar-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

## Peak Optimization Flags (Continued)

541.leela\_r: basepeak = yes

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>  
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>  
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-03-14 11:01:09-0400.

Report generated on 2019-05-23 12:40:44 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-02.