



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge M640 (Intel Xeon Platinum 8260L,  
2.40GHz)

**SPECrate2017\_int\_base = 284**

**SPECrate2017\_int\_peak = 296**

CPU2017 License: 55


Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

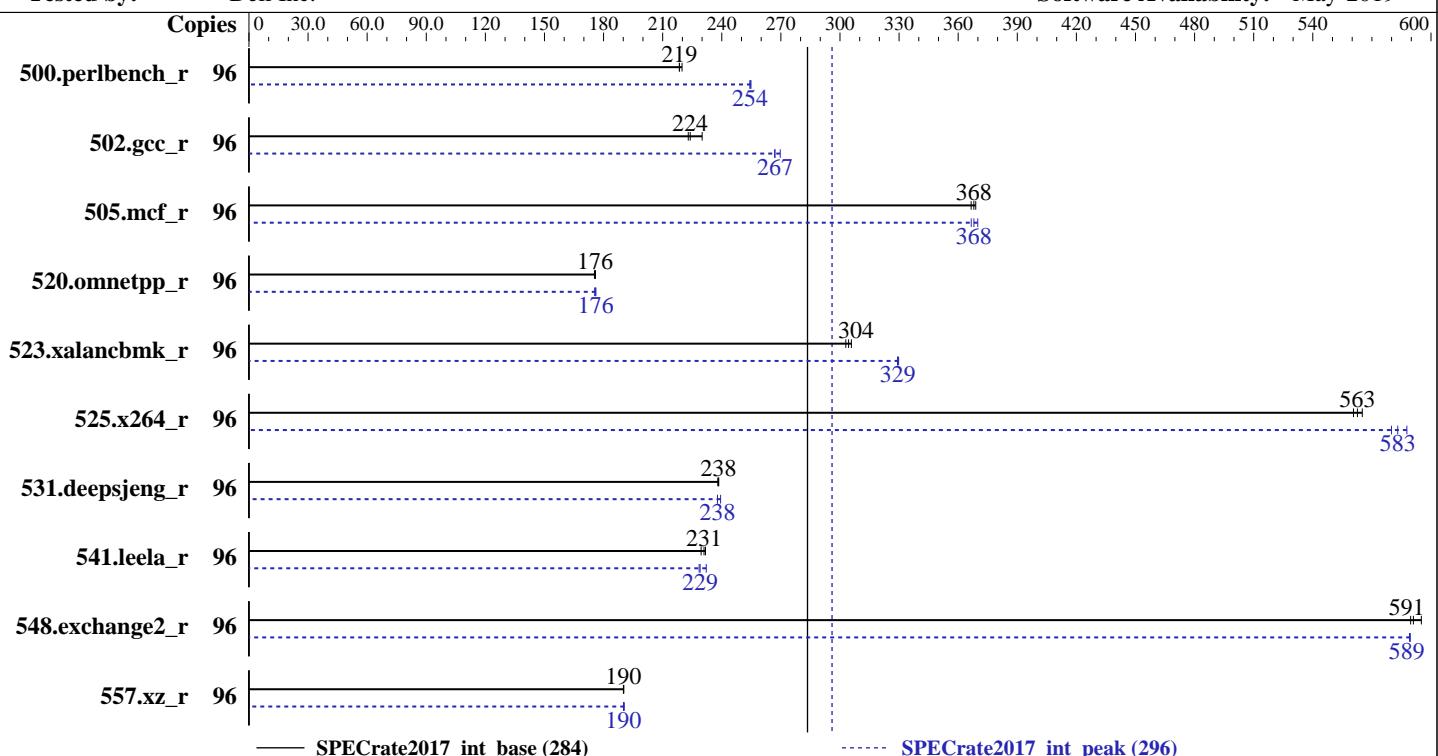

## Hardware

CPU Name: Intel Xeon Platinum 8260L  
 Max MHz.: 3900  
 Nominal: 2400  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

## Software

OS: Ubuntu 18.04.2 LTS  
 Compiler: kernel 4.15.0-50-generic  
 C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version 2.2.9 released May-2019  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8260L,  
2.40GHz)

**SPECrate2017\_int\_base = 284**

**SPECrate2017\_int\_peak = 296**

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	695	220	<b>699</b>	<b>219</b>	700	218	96	600	255	601	254	<b>601</b>	<b>254</b>		
502.gcc_r	96	591	230	<b>607</b>	<b>224</b>	610	223	96	<b>509</b>	<b>267</b>	509	267	<b>504</b>	<b>270</b>		
505.mcf_r	96	423	367	<b>422</b>	<b>368</b>	421	369	96	<b>422</b>	<b>368</b>	423	367	<b>419</b>	<b>370</b>		
520.omnetpp_r	96	716	176	718	175	<b>717</b>	<b>176</b>	96	<b>716</b>	<b>176</b>	718	175	<b>715</b>	<b>176</b>		
523.xalancbmk_r	96	<b>333</b>	<b>304</b>	335	303	332	306	96	307	330	308	329	<b>308</b>	<b>329</b>		
525.x264_r	96	297	565	300	561	<b>299</b>	<b>563</b>	96	286	588	<b>288</b>	<b>583</b>	290	580		
531.deepsjeng_r	96	<b>462</b>	<b>238</b>	462	238	461	238	96	460	239	<b>463</b>	<b>238</b>	463	238		
541.leela_r	96	686	232	693	230	<b>688</b>	<b>231</b>	96	685	232	696	228	<b>694</b>	<b>229</b>		
548.exchange2_r	96	<b>426</b>	<b>591</b>	423	595	427	590	96	427	589	<b>427</b>	<b>589</b>	427	589		
557.xz_r	96	<b>545</b>	<b>190</b>	545	190	545	190	96	544	191	545	190	<b>545</b>	<b>190</b>		

**SPECrate2017\_int\_base = 284**

**SPECrate2017\_int\_peak = 296**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8260L,  
2.40GHz)

SPECrate2017\_int\_base = 284

SPECrate2017\_int\_peak = 296

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## General Notes (Continued)

```
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

BIOS settings:

ADDDC setting disabled

Sub NUMA Cluster enabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on intel-sut Fri Jul 5 16:00:33 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8260L CPU @ 2.40GHz

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 6 8 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 96

On-line CPU(s) list: 0-95

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8260L,  
2.40GHz)

SPECrate2017\_int\_base = 284

SPECrate2017\_int\_peak = 296

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Platform Notes (Continued)

Thread(s) per core: 2  
Core(s) per socket: 24  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Platinum 8260L CPU @ 2.40GHz  
Stepping: 6  
CPU MHz: 3260.398  
BogoMIPS: 4800.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 36608K  
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92  
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93  
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94  
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperf mpf perf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt aes xsave avx f16c rdrandlahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni md\_clear flush\_lld arch\_capabilities

/proc/cpuinfo cache data  
cache size : 36608 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92  
node 0 size: 95145 MB  
node 0 free: 94798 MB  
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93  
node 1 size: 96763 MB

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8260L,  
2.40GHz)

SPECCrate2017\_int\_base = 284

SPECCrate2017\_int\_peak = 296

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Platform Notes (Continued)

```
node 1 free: 96412 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94
node 2 size: 96763 MB
node 2 free: 96396 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95
node 3 size: 96740 MB
node 3 free: 96525 MB
node distances:
node   0   1   2   3
  0: 10 21 11 21
  1: 21 10 21 11
  2: 11 21 10 21
  3: 21 11 21 10

From /proc/meminfo
MemTotal:           394663452 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS

From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="18.04.2 LTS (Bionic Beaver)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 18.04.2 LTS"
  VERSION_ID="18.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"

uname -a:
Linux intel-sut 4.15.0-50-generic #54-Ubuntu SMP Mon May 6 18:46:08 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling

run-level 5 Jul 5 15:59
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8260L,  
2.40GHz)

SPECCrate2017\_int\_base = 284

SPECCrate2017\_int\_peak = 296

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	439G	34G	384G	8%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.2.9 05/08/2019

Memory:

6x	00AD00B300AD	HMA84GR7CJR4N-WM	32 GB	2	rank	2933
1x	00AD063200AD	HMA84GR7CJR4N-WM	32 GB	2	rank	2933
5x	00AD069D00AD	HMA84GR7CJR4N-WM	32 GB	2	rank	2933
4x	Not Specified	Not Specified				

(End of data from sysinfo program)

## Compiler Version Notes

=====

CC 502.gcc\_r(peak)

-----

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

CC 500.perlbench\_r(peak)

-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

CXXC 523.xalancbmk\_r(peak)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8260L,  
2.40GHz)

**SPECrate2017\_int\_base = 284**

**SPECrate2017\_int\_peak = 296**

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
CXXC 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
FC 548.exchange2\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8260L,  
2.40GHz)

**SPECrate2017\_int\_base = 284**

**SPECrate2017\_int\_peak = 296**

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Base Portability Flags (Continued)

541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64 -std=c11

502.gcc\_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

icpc -m64

523.xalancbmk\_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/ia32\_lin

Fortran benchmarks:

ifort -m64



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8260L,  
2.40GHz)

SPECRate2017\_int\_base = 284

SPECRate2017\_int\_peak = 296

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

502.gcc\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

525.x264\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Platinum 8260L,  
2.40GHz)

SPECrate2017\_int\_base = 284

SPECrate2017\_int\_peak = 296

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Peak Optimization Flags (Continued)

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-07-05 12:00:33-0400.

Report generated on 2019-08-06 17:56:30 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-06.