



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

# Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7742)

SPECspeed2017\_int\_base = 8.33

SPECspeed2017\_int\_peak = 8.67

CPU2017 License: 001176


**Test Date:** Jul-2019

**Test Sponsor:** Supermicro

## **Hardware Availability:** Aug-2019

**Tested by:** Supermicro

### **Software Availability:** Apr-2019

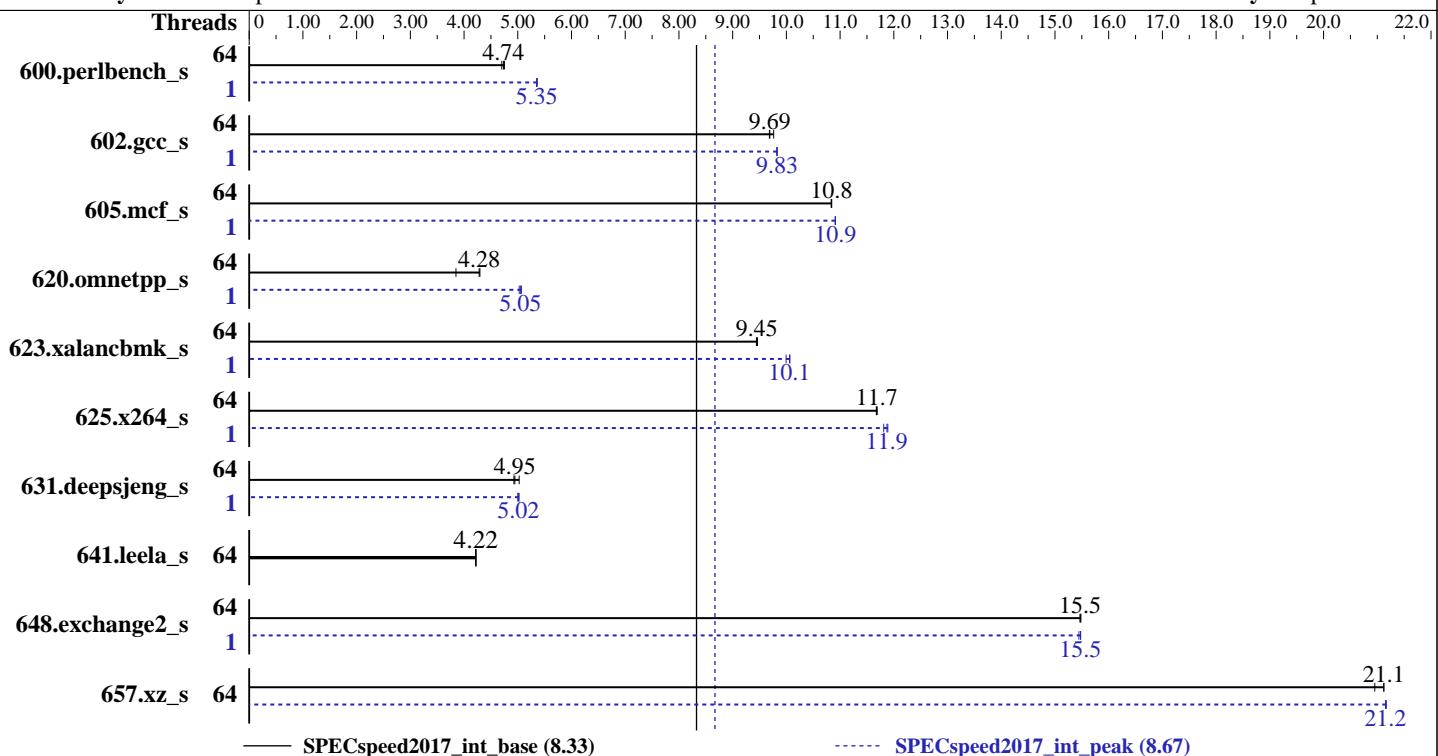

<b>Hardware</b>		<b>Software</b>	
CPU Name:	AMD EPYC 7742	OS:	Ubuntu 19.04
Max MHz.:	3400		kernel 5.0.0-20-generic
Nominal:	2250	Compiler:	C/C++: Version 1.3.0 of AOCC Fortran: Version 4.8.2 of GCC
Enabled:	128 cores, 2 chips, 2 threads/core	Parallel:	Yes
Orderable:	1,2 chips	Firmware:	Version 2.0 released Jul-2019
Cache L1:	32 KB I + 32 KB D on chip per core	File System:	ext4
L2:	512 KB I+D on chip per core	System State:	Run level 5 (multi-user)
L3:	256 MB I+D on chip per chip, 16 MB shared / 4 cores	Base Pointers:	64-bit
Other:	None	Peak Pointers:	32/64-bit
Memory:	1 TB (32 x 32 GB 2Rx4 PC4-3200AA-R)	Other:	jemalloc memory allocator library v5.1.0
Storage:	1 x 4 TB SATAIII, 7200 RPM		
Other:	None		



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7742)

**SPECspeed2017\_int\_base = 8.33**

**SPECspeed2017\_int\_peak = 8.67**

CPU2017 License: 001176

Test Date: Jul-2019

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Apr-2019

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	374	4.75	<b>375</b>	<b>4.74</b>	377	4.70	1	331	5.36	332	5.35	<b>332</b>	<b>5.35</b>		
602.gcc_s	64	<b>411</b>	<b>9.69</b>	408	9.76	411	9.68	1	405	9.83	405	9.82	<b>405</b>	<b>9.83</b>		
605.mcf_s	64	435	10.8	<b>436</b>	<b>10.8</b>	436	10.8	1	433	10.9	433	10.9	<b>433</b>	<b>10.9</b>		
620.omnetpp_s	64	380	4.30	424	3.85	<b>381</b>	<b>4.28</b>	1	324	5.03	<b>323</b>	<b>5.05</b>	322	5.07		
623.xalancbmk_s	64	150	9.44	<b>150</b>	<b>9.45</b>	150	9.46	1	142	10.0	<b>141</b>	<b>10.1</b>	141	10.1		
625.x264_s	64	<b>151</b>	<b>11.7</b>	151	11.7	151	11.7	1	148	11.9	149	11.8	<b>149</b>	<b>11.9</b>		
631.deepsjeng_s	64	291	4.93	285	5.03	<b>290</b>	<b>4.95</b>	1	285	5.02	<b>286</b>	<b>5.02</b>	287	5.00		
641.leela_s	64	405	4.22	<b>404</b>	<b>4.22</b>	404	4.22	64	405	4.22	<b>404</b>	<b>4.22</b>	404	4.22		
648.exchange2_s	64	<b>190</b>	<b>15.5</b>	190	15.5	190	15.5	1	190	15.4	<b>190</b>	<b>15.5</b>	190	15.5		
657.xz_s	64	<b>293</b>	<b>21.1</b>	293	21.1	295	21.0	64	<b>292</b>	<b>21.2</b>	292	21.2	292	21.2		
SPECspeed2017_int_base = 8.33								SPECspeed2017_int_peak = 8.67								

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

The AOCC Fortran Plugin version 1.3.0 was used to leverage AOCC optimizers with gfortran. It is available here:  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7742)

SPECspeed2017\_int\_base = 8.33

SPECspeed2017\_int\_peak = 8.67

CPU2017 License: 001176

Test Date: Jul-2019

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Apr-2019

## Operating System Notes (Continued)

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-63"

LD\_LIBRARY\_PATH = "/home/cpu2017/amd\_speed\_aocc130\_naples\_A/lib/64;/home/cpu2017/amd\_speed\_aocc130\_naples\_A/lib/32:"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "128"

Binaries were compiled on a system with 2p AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.5 in RHEL v7.2 under default conditions.

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS Settings:

Determinism Control = Manual

Determinism Slider = Power

cTDP Control = Manual

cTDP = 240

IOMMU = Enabled

APBDIS = 1

NUMA Nodes Per Socket = NPS4

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on cpu2017 Sat Jul 20 11:53:47 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7742)

SPECspeed2017\_int\_base = 8.33

SPECspeed2017\_int\_peak = 8.67

CPU2017 License: 001176

Test Date: Jul-2019

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Apr-2019

## Platform Notes (Continued)

```
model name : AMD EPYC 7742 64-Core Processor
  2 "physical id"s (chips)
  256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 64
siblings : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         43 bits physical, 48 bits virtual
CPU(s):                256
On-line CPU(s) list:  0-255
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):             2
NUMA node(s):          8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7742 64-Core Processor
Stepping:               0
CPU MHz:                3239.889
CPU max MHz:           2250.0000
CPU min MHz:           1500.0000
BogoMIPS:              4500.37
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:                512K
L3 cache:                16384K
NUMA node0 CPU(s):     0-15,128-143
NUMA node1 CPU(s):     16-31,144-159
NUMA node2 CPU(s):     32-47,160-175
NUMA node3 CPU(s):     48-63,176-191
NUMA node4 CPU(s):     64-79,192-207
NUMA node5 CPU(s):     80-95,208-223
NUMA node6 CPU(s):     96-111,224-239
NUMA node7 CPU(s):     112-127,240-255
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7742)

SPECspeed2017\_int\_base = 8.33

SPECspeed2017\_int\_peak = 8.67

CPU2017 License: 001176

Test Date: Jul-2019

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Apr-2019

## Platform Notes (Continued)

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm constant\_tsc rep\_good nopl xtopology nonstop\_tsc cpuid extd\_apicid aperfmpfperf pnpi pclmulqdq monitor ssse3 fma cx16 sse4\_1 sse4\_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_llc mwaitx cpb cat\_13 cdp\_13 hw\_pstate sme ssbd mba dev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 cqm rdt\_a rdseed adx smap clflushopt clwb sha\_ni xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm\_lock nrrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold avic v\_vmsave\_vmload vgif umip rdpid overflow\_recov succor smca

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143  
node 0 size: 128877 MB  
node 0 free: 127735 MB  
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159  
node 1 size: 129015 MB  
node 1 free: 128413 MB  
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175  
node 2 size: 129015 MB  
node 2 free: 128426 MB  
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191  
node 3 size: 129003 MB  
node 3 free: 128395 MB  
node 4 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207  
node 4 size: 129015 MB  
node 4 free: 128377 MB  
node 5 cpus: 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223  
node 5 size: 128992 MB  
node 5 free: 128313 MB  
node 6 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239  
node 6 size: 129015 MB  
node 6 free: 128365 MB

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7742)

SPECspeed2017\_int\_base = 8.33

SPECspeed2017\_int\_peak = 8.67

CPU2017 License: 001176

Test Date: Jul-2019

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Apr-2019

## Platform Notes (Continued)

```
node 7 cpus: 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 240 241
242 243 244 245 246 247 248 249 250 251 252 253 254 255
```

```
node 7 size: 129014 MB
```

```
node 7 free: 128352 MB
```

```
node distances:
```

node	0	1	2	3	4	5	6	7
0:	10	12	12	12	32	32	32	32
1:	12	10	12	12	32	32	32	32
2:	12	12	10	12	32	32	32	32
3:	12	12	12	10	32	32	32	32
4:	32	32	32	32	10	12	12	12
5:	32	32	32	32	12	10	12	12
6:	32	32	32	32	12	12	10	12
7:	32	32	32	32	12	12	12	10

```
From /proc/meminfo
```

```
MemTotal: 1056718148 kB
```

```
HugePages_Total: 0
```

```
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Ubuntu 19.04
```

```
From /etc/*release* /etc/*version*
```

```
debian_version: buster/sid
```

```
os-release:
```

```
NAME="Ubuntu"
```

```
VERSION="19.04 (Disco Dingo)"
```

```
ID=ubuntu
```

```
ID_LIKE=debian
```

```
PRETTY_NAME="Ubuntu 19.04"
```

```
VERSION_ID="19.04"
```

```
HOME_URL="https://www.ubuntu.com/"
```

```
SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
```

```
Linux cpu2017 5.0.0-20-generic #21-Ubuntu SMP Mon Jun 24 09:32:09 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

```
Kernel self-reported vulnerability status:
```

```
CVE-2017-5754 (Meltdown): Not affected
```

```
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
```

```
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
IBRS_FW, STIBP: conditional, RSB filling
```

```
run-level 5 Jul 19 18:49
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7742)

SPECspeed2017\_int\_base = 8.33

SPECspeed2017\_int\_peak = 8.67

CPU2017 License: 001176

Test Date: Jul-2019

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Apr-2019

## Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	3.6T	15G	3.4T	1%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0 07/19/2019

Memory:

32x SK Hynix HMA84GR7CJR4N-XN 32 kB 2 rank 3200

(End of data from sysinfo program)

## Compiler Version Notes

=====

CXXC 623.xalancbmk\_s(peak)

=====

AOCC\_LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC\_LLVM.1.3.0.B34.2018\_10\_22)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin

=====

=====

CC 600.perlbench\_s(base) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak)  
625.x264\_s(base) 657.xz\_s(base, peak)

=====

AOCC\_LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC\_LLVM.1.3.0.B34.2018\_10\_22)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin

=====

=====

CXXC 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base,  
peak) 641.leela\_s(base)

=====

AOCC\_LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins

AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC\_LLVM.1.3.0.B34.2018\_10\_22)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7742)

SPECspeed2017\_int\_base = 8.33

SPECspeed2017\_int\_peak = 8.67

CPU2017 License: 001176

Test Date: Jul-2019

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Apr-2019

## Compiler Version Notes (Continued)

InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin

=====

CC 600.perlbench\_s(peak) 625.x264\_s(peak)

=====

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin

=====

CXXC 641.leela\_s(peak)

=====

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin

=====

FC 648.exchange2\_s(base, peak)

=====

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7742)

SPECspeed2017\_int\_base = 8.33

SPECspeed2017\_int\_peak = 8.67

CPU2017 License: 001176

Test Date: Jul-2019

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Apr-2019

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-flicht -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compare -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -ljemalloc -lamdlibm
```

C++ benchmarks:

```
-flicht -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compare -O3 -march=znver1
-mllvm -unroll-threshold=100 -finline-aggressive -freemap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-vectorize-compare=false
-z muldefs -DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread
-ldl -ljemalloc -lamdlibm
```

Fortran benchmarks:

```
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsrc-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-merge-constant
-Wl,-mllvm -Wl,-unroll-aggressive -Wl,-mllvm -Wl,-unroll-threshold=150
-flicht -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compare -O3 -mavx -madx
-funroll-loops -ffast-math -frepack-arrays -z muldefs
-fplugin=dragonegg.so -specs=integrated-as.specs
-fplugin-arg-dragonegg-llvm-option=-disable-indvar-simplify
-fplugin-arg-dragonegg-llvm-option=-unroll-aggressive
-fplugin-arg-dragonegg-llvm-option=-unroll-threshold:150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lpthread -ldl -ljemalloc -lamdlibm
-lgfortran
```



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7742)

SPECspeed2017\_int\_base = 8.33

SPECspeed2017\_int\_peak = 8.67

CPU2017 License: 001176

Test Date: Jul-2019

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Apr-2019

## Base Other Flags

C benchmarks:

-Wno-return-type -DUSE\_OPENMP

C++ benchmarks:

-Wno-return-type -DUSE\_OPENMP

Fortran benchmarks:

-DUSE\_OPENMP -Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Peak Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -D\_FILE\_OFFSET\_BITS=64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: -fsto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-enable-vectorize-compare  
-fprofile-instr-generate(pass 1)

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7742)

SPECspeed2017\_int\_base = 8.33

SPECspeed2017\_int\_peak = 8.67

CPU2017 License: 001176

Test Date: Jul-2019

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Apr-2019

## Peak Optimization Flags (Continued)

600.perlbench\_s (continued):

```
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -ljemalloc
```

602.gcc\_s: -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-enable-vectorize-compare -Ofast
-march=znver1 -fstruct-layout=3
-mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -z muldefs -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lamdlibm
```

605.mcf\_s: -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-enable-vectorize-compare -Ofast
-march=znver1 -fstruct-layout=3
-mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -ljemalloc
-lamdlibm
```

625.x264\_s: -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-enable-vectorize-compare
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-mno-avx2 -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-lamdlibm -fopenmp=libomp -lomp -ljemalloc -lpthread
-ldl
```

657.xz\_s: Same as 605.mcf\_s

C++ benchmarks:

620.omnetpp\_s: -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-enable-vectorize-compare -Ofast
-march=znver1 -finline-aggressive
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7742)

SPECSPEED2017\_int\_base = 8.33

SPECSPEED2017\_int\_peak = 8.67

CPU2017 License: 001176

Test Date: Jul-2019

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Apr-2019

## Peak Optimization Flags (Continued)

620.omnetpp\_s (continued):

```
-fopenmp=libomp -lomp -lpthread -ldl -ljemalloc  
-lamdlibm
```

```
623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-enable-vectorize-compare -Ofast  
-march=znver1 -finline-aggressive  
-mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -z muldefs -DSPEC_OPENMP  
-fopenmp -fopenmp=libomp -lomp -lpthread -ldl  
-ljemalloc
```

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: basepeak = yes

Fortran benchmarks:

```
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-merge-constant  
-Wl,-mllvm -Wl,-unroll-aggressive -Wl,-mllvm -Wl,-unroll-threshold=150  
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-enable-vectorize-compare -O3 -mavx -madx  
-funroll-loops -ffast-math -frepck-arrays -fplugin=dragonegg.so  
-specs=integrated-as.specs  
-fplugin-arg-dragonegg-llvm-option=-disable-indvar-simplify  
-fplugin-arg-dragonegg-llvm-option=-unroll-aggressive  
-fplugin-arg-dragonegg-llvm-option=-unroll-threshold:150 -DSPEC_OPENMP  
-fopenmp -fopenmp=libomp -lomp -lpthread -ldl -ljemalloc -lamdlibm  
-lgfortran
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -DUSE_OPENMP
```

C++ benchmarks (except as noted below):

```
-Wno-return-type -DUSE_OPENMP
```

```
623.xalancbmk_s: -Wno-return-type -DUSE_OPENMP  
-L/root/work/compilers/aoocl.3.0/AOCC-1.3.0-Compiler/lib32/lib  
-L/root/work/lib/jemalloc510/lib32
```

Fortran benchmarks:

```
-DUSE_OPENMP -Wno-return-type
```



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7742)

SPECspeed2017\_int\_base = 8.33

SPECspeed2017\_int\_peak = 8.67

CPU2017 License: 001176

Test Date: Jul-2019

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Apr-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc130-flags-revA21.html>

<http://www.spec.org/cpu2017/flags/gcc.2019-08-07.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc130-flags-revA21.xml>

<http://www.spec.org/cpu2017/flags/gcc.2019-08-07.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-07-20 07:53:47-0400.

Report generated on 2019-08-07 19:43:11 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-07.