



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7525 (AMD EPYC 7542, 2.90 GHz)

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

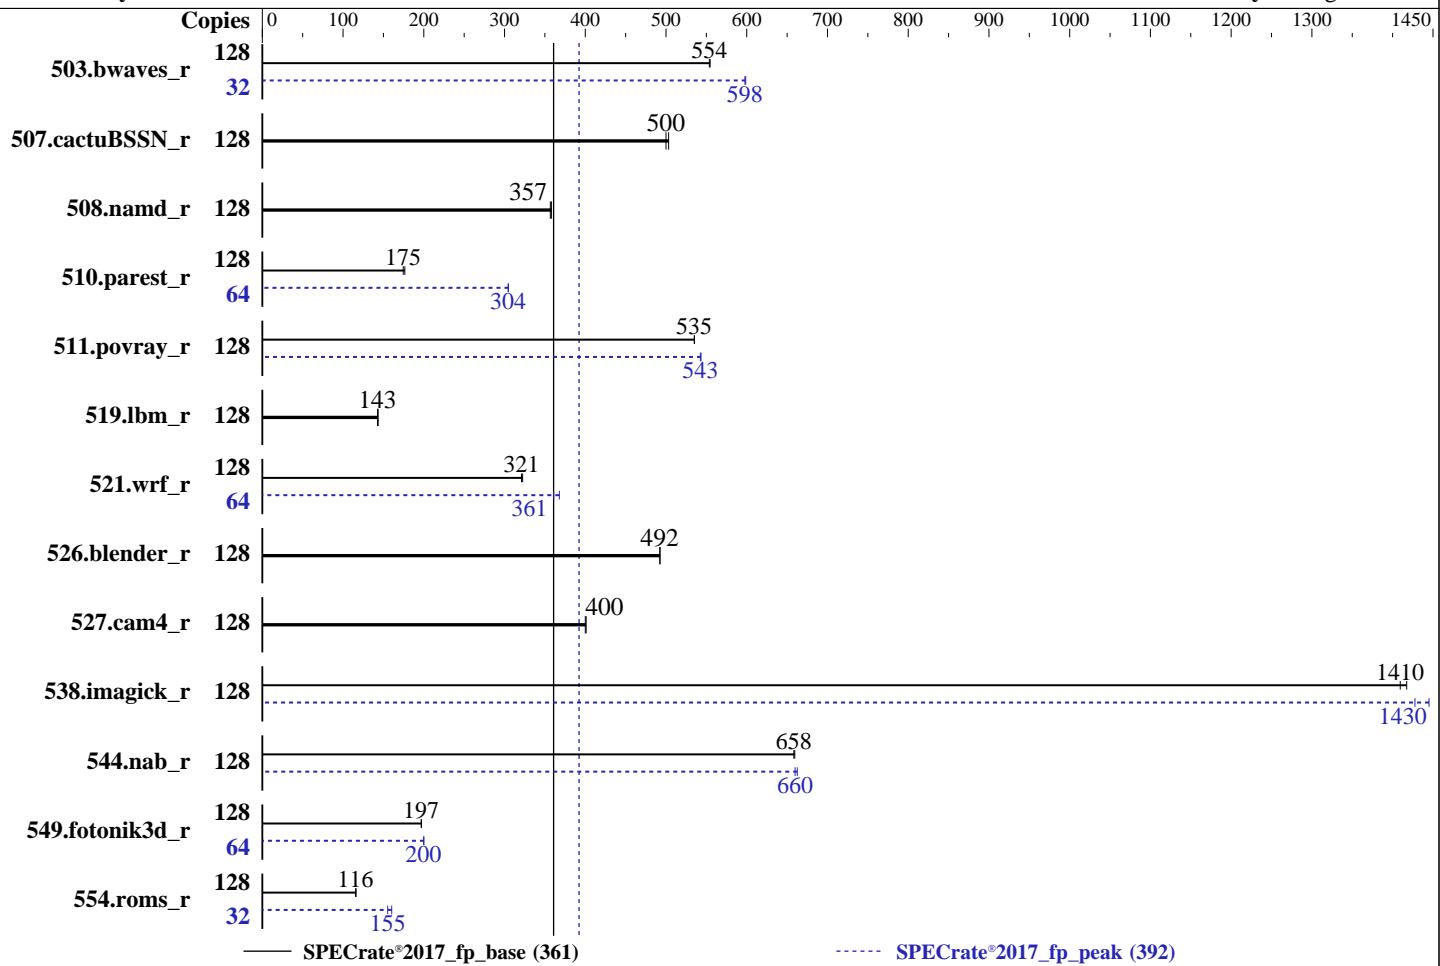

Hardware

CPU Name: AMD EPYC 7542
 Max MHz: 3400
 Nominal: 2900
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 2 x 960 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1
 Compiler: kernel 4.12.14-195-default
 Parallel: C/C++/Fortran: Version 2.0.0 of AOCC
 Firmware: No
 File System: Version 1.2.6 released Nov-2019
 System State: xfs
 Base Pointers: Run level 3 (multi-user)
 Peak Pointers: 64-bit
 Other: 64-bit
 Power Management: jemalloc: jemalloc memory allocator library v5.2.0
 BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7525 (AMD EPYC 7542, 2.90 GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	2314	555	<u>2318</u>	<u>554</u>			32	<u>537</u>	<u>598</u>	536	599				
507.cactusBSSN_r	128	<u>324</u>	<u>500</u>	322	503			128	<u>324</u>	<u>500</u>	322	503				
508.namd_r	128	340	358	<u>341</u>	<u>357</u>			128	340	358	<u>341</u>	<u>357</u>				
510.parest_r	128	1897	177	<u>1918</u>	<u>175</u>			64	549	305	<u>550</u>	<u>304</u>				
511.povray_r	128	<u>559</u>	<u>535</u>	558	535			128	550	543	<u>551</u>	<u>543</u>				
519.lbm_r	128	941	143	<u>945</u>	<u>143</u>			128	941	143	<u>945</u>	<u>143</u>				
521.wrf_r	128	<u>893</u>	<u>321</u>	889	322			64	<u>397</u>	<u>361</u>	390	368				
526.blender_r	128	396	493	<u>396</u>	<u>492</u>			128	396	493	<u>396</u>	<u>492</u>				
527.cam4_r	128	558	401	<u>560</u>	<u>400</u>			128	558	401	<u>560</u>	<u>400</u>				
538.imagick_r	128	<u>226</u>	<u>1410</u>	225	1420			128	220	1450	<u>223</u>	<u>1430</u>				
544.nab_r	128	<u>327</u>	<u>658</u>	327	659			128	325	663	<u>326</u>	<u>660</u>				
549.fotonik3d_r	128	2532	197	<u>2534</u>	<u>197</u>			64	1246	200	<u>1249</u>	<u>200</u>				
554.roms_r	128	1751	116	<u>1761</u>	<u>116</u>			32	317	160	<u>327</u>	<u>155</u>				

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
 Set swappiness=1 to swap only if necessary
 Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2019
Hardware Availability: Feb-2020
Software Availability: Aug-2019

Operating System Notes (Continued)

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/root/cpu2017-1.1.0/amd_rate_aocc200_rome_C_lib/64;/root/cpu2017-1.1.0/
     amd_rate_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fno-jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS settings:
NUMA Nodes Per Socket set to 4
CCX as NUMA Domain set to Enabled
System Profile set to Custom
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost Enabled
Cstates set to Enabled
Memory Patrol Scrub Disabled
Memory Refresh Rate set to 1x
PCI ASPM L1 Link Power Management Disabled
Determinism Slider set to Power Determinism
Efficiency Optimized Mode Disabled

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2019
Hardware Availability: Feb-2020
Software Availability: Aug-2019

Platform Notes (Continued)

Memory Interleaving set to Disabled

Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-g3ob Tue Nov 26 22:38:36 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7542 32-Core Processor
2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 43 bits physical, 48 bits virtual
CPU(s): 128
On-line CPU(s) list: 0-127
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
NUMA node(s): 16
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7542 32-Core Processor
Stepping: 0
CPU MHz: 2894.710
BogoMIPS: 5789.42
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-3,64-67

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2019
Hardware Availability: Feb-2020
Software Availability: Aug-2019

Platform Notes (Continued)

NUMA node1 CPU(s): 4-7,68-71
NUMA node2 CPU(s): 8-11,72-75
NUMA node3 CPU(s): 12-15,76-79
NUMA node4 CPU(s): 16-19,80-83
NUMA node5 CPU(s): 20-23,84-87
NUMA node6 CPU(s): 24-27,88-91
NUMA node7 CPU(s): 28-31,92-95
NUMA node8 CPU(s): 32-35,96-99
NUMA node9 CPU(s): 36-39,100-103
NUMA node10 CPU(s): 40-43,104-107
NUMA node11 CPU(s): 44-47,108-111
NUMA node12 CPU(s): 48-51,112-115
NUMA node13 CPU(s): 52-55,116-119
NUMA node14 CPU(s): 56-59,120-123
NUMA node15 CPU(s): 60-63,124-127
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmpfperf pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb cat_13 cdp_13 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 cqmq rdta rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmlload vgif umip rdpid overflow_recov succor smca

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 64 65 66 67
node 0 size: 31804 MB
node 0 free: 31589 MB
node 1 cpus: 4 5 6 7 68 69 70 71
node 1 size: 32253 MB
node 1 free: 32027 MB
node 2 cpus: 8 9 10 11 72 73 74 75
node 2 size: 32254 MB
node 2 free: 32056 MB
node 3 cpus: 12 13 14 15 76 77 78 79
node 3 size: 32253 MB
node 3 free: 32050 MB
node 4 cpus: 16 17 18 19 80 81 82 83
node 4 size: 32254 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2019
Hardware Availability: Feb-2020
Software Availability: Aug-2019

Platform Notes (Continued)

```
node 4 free: 32058 MB
node 5 cpus: 20 21 22 23 84 85 86 87
node 5 size: 32253 MB
node 5 free: 31987 MB
node 6 cpus: 24 25 26 27 88 89 90 91
node 6 size: 32254 MB
node 6 free: 32012 MB
node 7 cpus: 28 29 30 31 92 93 94 95
node 7 size: 32241 MB
node 7 free: 32029 MB
node 8 cpus: 32 33 34 35 96 97 98 99
node 8 size: 32254 MB
node 8 free: 32029 MB
node 9 cpus: 36 37 38 39 100 101 102 103
node 9 size: 32253 MB
node 9 free: 32055 MB
node 10 cpus: 40 41 42 43 104 105 106 107
node 10 size: 32254 MB
node 10 free: 32050 MB
node 11 cpus: 44 45 46 47 108 109 110 111
node 11 size: 32253 MB
node 11 free: 32057 MB
node 12 cpus: 48 49 50 51 112 113 114 115
node 12 size: 32254 MB
node 12 free: 32057 MB
node 13 cpus: 52 53 54 55 116 117 118 119
node 13 size: 32224 MB
node 13 free: 32028 MB
node 14 cpus: 56 57 58 59 120 121 122 123
node 14 size: 32254 MB
node 14 free: 32057 MB
node 15 cpus: 60 61 62 63 124 125 126 127
node 15 size: 32252 MB
node 15 free: 32058 MB
node distances:
node   0    1    2    3    4    5    6    7    8    9    10   11   12   13   14   15
  0: 10   11   11   11   12   12   12   12   32   32   32   32   32   32   32   32
  1: 11   10   11   11   12   12   12   12   32   32   32   32   32   32   32   32
  2: 11   11   10   11   12   12   12   12   32   32   32   32   32   32   32   32
  3: 11   11   11   10   12   12   12   12   32   32   32   32   32   32   32   32
  4: 12   12   12   12   10   11   11   11   32   32   32   32   32   32   32   32
  5: 12   12   12   12   11   10   11   11   32   32   32   32   32   32   32   32
  6: 12   12   12   12   11   11   10   11   32   32   32   32   32   32   32   32
  7: 12   12   12   12   11   11   11   10   32   32   32   32   32   32   32   32
  8: 32   32   32   32   32   32   32   32   10   11   11   11   12   12   12   12
  9: 32   32   32   32   32   32   32   32   11   10   11   11   12   12   12   12
 10: 32   32   32   32   32   32   32   32   11   11   10   11   12   12   12   12
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2019
Hardware Availability: Feb-2020
Software Availability: Aug-2019

Platform Notes (Continued)

```
11: 32 32 32 32 32 32 32 32 32 11 11 11 10 12 12 12 12  
12: 32 32 32 32 32 32 32 32 32 12 12 12 12 10 11 11 11  
13: 32 32 32 32 32 32 32 32 32 12 12 12 12 11 10 11 11  
14: 32 32 32 32 32 32 32 32 32 12 12 12 12 11 11 10 11  
15: 32 32 32 32 32 32 32 32 32 12 12 12 12 11 11 11 10
```

```
From /proc/meminfo  
MemTotal:      527946176 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*  
os-release:  
NAME="SLES"  
VERSION="15-SP1"  
VERSION_ID="15.1"  
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"  
ID="sles"  
ID_LIKE="suse"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:  
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)  
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

```
run-level 3 Nov 26 17:20 last=5
```

```
SPEC is set to: /root/cpu2017-1.1.0  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda2        xfs   440G   46G  395G  11%  /
```

```
From /sys/devices/virtual/dmi/id  
BIOS:    Dell Inc. 1.2.6 11/21/2019  
Vendor:  Dell Inc.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2019
Hardware Availability: Feb-2020
Software Availability: Aug-2019

Platform Notes (Continued)

Product: PowerEdge R7525
Product Family: PowerEdge

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
16x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2019
Hardware Availability: Feb-2020
Software Availability: Aug-2019

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7525 (AMD EPYC 7542, 2.90 GHz)

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64

527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2019
Hardware Availability: Feb-2020
Software Availability: Aug-2019

Base Optimization Flags

C benchmarks:

```
-futto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-std=c++98 -futto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-futto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-futto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -futto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7525 (AMD EPYC 7542, 2.90 GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs  
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -ftlo -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch  
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only  
-lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7525 (AMD EPYC 7542, 2.90 GHz)

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes

538.imagick_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

```
508.namd_r: basepeak = yes

510.parest_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -Ofast -march=znver2
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

Fortran benchmarks:

```
503.bwaves_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7525 (AMD EPYC 7542, 2.90 GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

503.bwaves_r (continued):

```
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3  
-march=znver2 -funroll-loops -Mrecursive  
-mllvm -vector-library=LIBMVEC -Kieee  
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc  
-lflang
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2  
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC  
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc  
-lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -O3 -funroll-loops  
-Mrecursive -Kieee -fno-finite-math-only -lmvec  
-lamdlibm -ljemalloc -lflang
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7525 (AMD EPYC 7542, 2.90 GHz)

SPECrate®2017_fp_base = 361

SPECrate®2017_fp_peak = 392

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-26 23:38:36-0500.

Report generated on 2019-12-26 11:35:45 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-24.