



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 330

BrainSphere R365 F4 (AMD EPYC 7402)

SPECrate®2017_int_peak = 349

CPU2017 License: 97


Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Sep-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2020

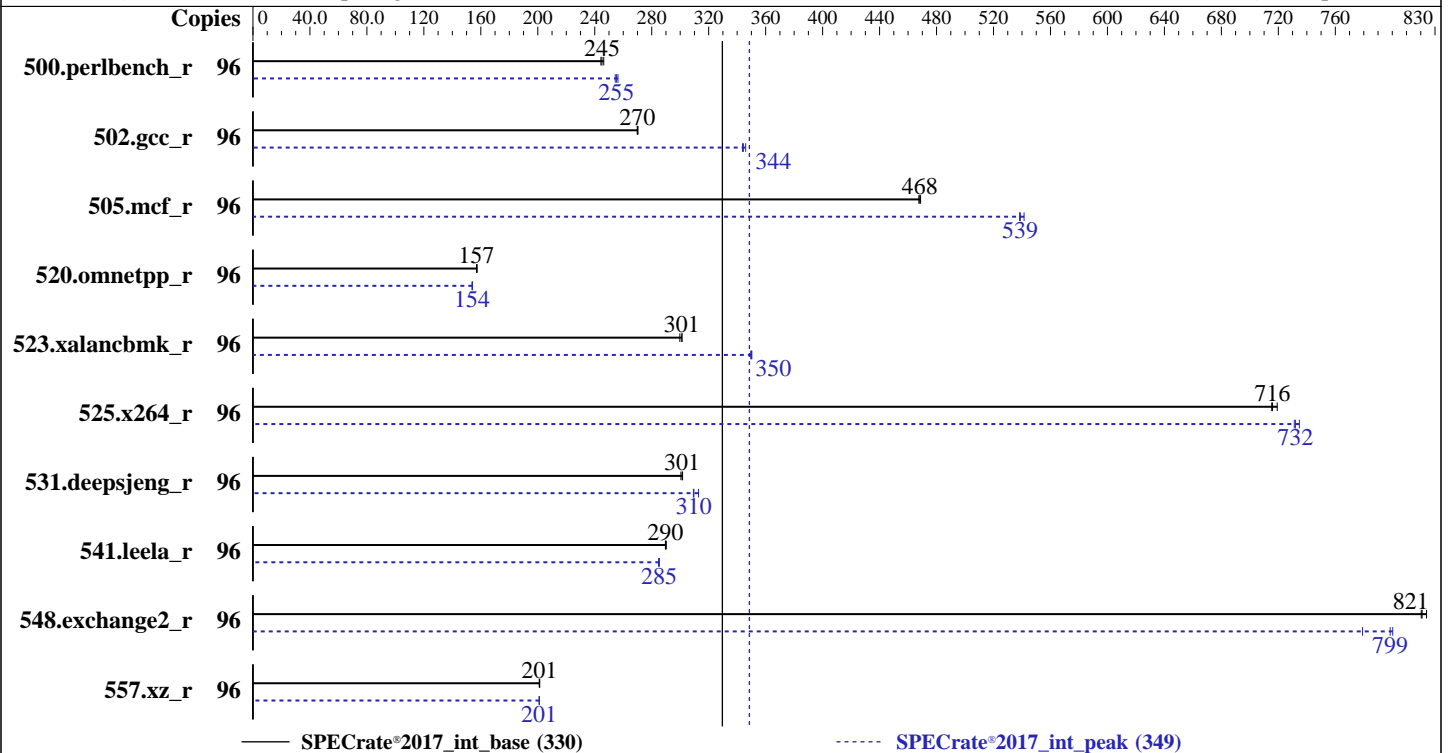

Hardware

CPU Name: AMD EPYC 7402
 Max MHz: 3350
 Nominal: 2800
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip,
 16 MB shared / 3 cores
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 1.6 TB SATA SSD
 Other: None

Software

OS: Ubuntu 18.04.2 LTS
 kernel 4.15.0-117-generic
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: Version R11 released Oct-2019
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.2.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 330

BrainSphere R365 F4 (AMD EPYC 7402)

SPECrate®2017_int_peak = 349

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Sep-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2020

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|--------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 96 | 620 | 246 | <u>624</u> | <u>245</u> | 625 | 244 | 96 | 596 | 256 | 601 | 254 | <u>599</u> | <u>255</u> |
| 502.gcc_r | 96 | 503 | 270 | <u>503</u> | <u>270</u> | 504 | 270 | 96 | 395 | 344 | <u>395</u> | <u>344</u> | 393 | 346 |
| 505.mcf_r | 96 | <u>331</u> | <u>468</u> | 332 | 468 | 331 | 469 | 96 | 288 | 538 | 287 | 541 | <u>288</u> | <u>539</u> |
| 520.omnetpp_r | 96 | <u>802</u> | <u>157</u> | 800 | 157 | 802 | 157 | 96 | 818 | 154 | <u>818</u> | <u>154</u> | 818 | 154 |
| 523.xalancbmk_r | 96 | 337 | 301 | <u>337</u> | <u>301</u> | 338 | 300 | 96 | 290 | 350 | 289 | 350 | <u>290</u> | <u>350</u> |
| 525.x264_r | 96 | 234 | 719 | 235 | 715 | <u>235</u> | <u>716</u> | 96 | <u>230</u> | <u>732</u> | 229 | 735 | 230 | 731 |
| 531.deepsjeng_r | 96 | 366 | 300 | <u>365</u> | <u>301</u> | 365 | 302 | 96 | 352 | 313 | 356 | 309 | <u>355</u> | <u>310</u> |
| 541.leela_r | 96 | <u>549</u> | <u>290</u> | 548 | 290 | 549 | 290 | 96 | 557 | 285 | 558 | 285 | <u>558</u> | <u>285</u> |
| 548.exchange2_r | 96 | 307 | 820 | <u>306</u> | <u>821</u> | 305 | 824 | 96 | <u>315</u> | <u>799</u> | 314 | 800 | 323 | 779 |
| 557.xz_r | 96 | <u>515</u> | <u>201</u> | 516 | 201 | 515 | 201 | 96 | <u>516</u> | <u>201</u> | 515 | 201 | 516 | 201 |

SPECrate®2017_int_base = 330

SPECrate®2017_int_peak = 349

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 330

BrainSphere R365 F4 (AMD EPYC 7402)

SPECrate®2017_int_peak = 349

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Sep-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2020

Operating System Notes (Continued)

Transparent huge pages set to 'always' for this run (OS default)

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc200_rome_C_lib/64:/home/cpu2017/amd_rate_aoc
c200_rome_C_lib/32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS Configuration:

Power Policy Quick Settings set to Best Performance

NUMA Nodes Per Socket set to NPS4

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on r365f4 Sat Sep 26 06:20:23 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7402 24-Core Processor

2 "physical id"s (chips)

96 "processors"

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 330

BrainSphere R365 F4 (AMD EPYC 7402)

SPECrate®2017_int_peak = 349

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Sep-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2020

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 96

On-line CPU(s) list: 0-95

Thread(s) per core: 2

Core(s) per socket: 24

Socket(s): 2

NUMA node(s): 8

Vendor ID: AuthenticAMD

CPU family: 23

Model: 49

Model name: AMD EPYC 7402 24-Core Processor

Stepping: 0

CPU MHz: 1781.486

CPU max MHz: 2800.0000

CPU min MHz: 1500.0000

BogoMIPS: 5599.81

Virtualization: AMD-V

L1d cache: 32K

L1i cache: 32K

L2 cache: 512K

L3 cache: 16384K

NUMA node0 CPU(s): 0-5,48-53

NUMA node1 CPU(s): 6-11,54-59

NUMA node2 CPU(s): 12-17,60-65

NUMA node3 CPU(s): 18-23,66-71

NUMA node4 CPU(s): 24-29,72-77

NUMA node5 CPU(s): 30-35,78-83

NUMA node6 CPU(s): 36-41,84-89

NUMA node7 CPU(s): 42-47,90-95

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 330

BrainSphere R365 F4 (AMD EPYC 7402)

SPECrate®2017_int_peak = 349

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Sep-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2020

Platform Notes (Continued)

cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53
node 0 size: 64387 MB
node 0 free: 64038 MB
node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
node 1 size: 64505 MB
node 1 free: 64125 MB
node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
node 2 size: 64505 MB
node 2 free: 64172 MB
node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
node 3 size: 64493 MB
node 3 free: 64130 MB
node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
node 4 size: 64484 MB
node 4 free: 64223 MB
node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83
node 5 size: 64505 MB
node 5 free: 64273 MB
node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89
node 6 size: 64505 MB
node 6 free: 64182 MB
node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
node 7 size: 64503 MB
node 7 free: 64240 MB
```

```
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 12 12 12 32 32 32 32
 1:  12 10 12 12 32 32 32 32
 2:  12 12 10 12 32 32 32 32
 3:  12 12 12 10 32 32 32 32
 4:  32 32 32 32 10 12 12 12
 5:  32 32 32 32 12 10 12 12
 6:  32 32 32 32 12 12 10 12
 7:  32 32 32 32 12 12 12 10
```

```
From /proc/meminfo
MemTotal: 528272868 kB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 330

BrainSphere R365 F4 (AMD EPYC 7402)

SPECrate®2017_int_peak = 349

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Sep-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2020

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="18.04.2 LTS (Bionic Beaver)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 18.04.2 LTS"
  VERSION_ID="18.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux r365f4 4.15.0-117-generic #118-Ubuntu SMP Fri Sep 4 20:02:41 UTC 2020 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
itlb_multihit: Not affected
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: conditional, RSB
filling
srbds: Not affected
tsx_async_abort: Not affected
```

```
run-level 5 Sep 14 06:57
```

```
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 1.5T 704G 688G 51% /
```

```
From /sys/devices/virtual/dmi/id
BIOS: GIGABYTE R11 10/25/2019
Vendor: Acer
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 330

BrainSphere R365 F4 (AMD EPYC 7402)

SPECrate®2017_int_peak = 349

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Sep-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2020

Platform Notes (Continued)

Product: Altos R365 F4
Product Family: Server
Serial: DJ7002921A0002

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200
16x Unknown Unknown

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 502.gcc_r(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C | 502.gcc_r(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 330

BrainSphere R365 F4 (AMD EPYC 7402)

SPECrate®2017_int_peak = 349

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Sep-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2020

Compiler Version Notes (Continued)

```
=====
C          | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base, peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====
```

```
=====
C++       | 523.xalancbmk_r(peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====
```

```
=====
C++       | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====
```

```
=====
C++       | 523.xalancbmk_r(peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====
```

```
=====
C++       | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 330

BrainSphere R365 F4 (AMD EPYC 7402)

SPECrate®2017_int_peak = 349

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Sep-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2020

Compiler Version Notes (Continued)

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
-----
Fortran | 548.exchange2_r(base, peak)
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 330

BrainSphere R365 F4 (AMD EPYC 7402)

SPECrate®2017_int_peak = 349

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Sep-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2020

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 330

BrainSphere R365 F4 (AMD EPYC 7402)

SPECrate®2017_int_peak = 349

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Sep-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2020

Peak Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 330

BrainSphere R365 F4 (AMD EPYC 7402)

SPECrate®2017_int_peak = 349

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Sep-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2020

Peak Optimization Flags (Continued)

```
505.mcf_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

525.x264_r: Same as 500.perlbench_r

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 330

BrainSphere R365 F4 (AMD EPYC 7402)

SPECrate®2017_int_peak = 349

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Sep-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2020

Peak Optimization Flags (Continued)

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

502.gcc_r: -L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32

C++ benchmarks:

523.xalancbmk_r: -L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.html>

<http://www.spec.org/cpu2017/flags/Altos-Platform-Settings-V1.0-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.xml>

<http://www.spec.org/cpu2017/flags/Altos-Platform-Settings-V1.0-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-09-26 02:20:23-0400.

Report generated on 2020-10-27 16:15:26 by CPU2017 PDF formatter v6255.

Originally published on 2020-10-27.