



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019


Test Date: Dec-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

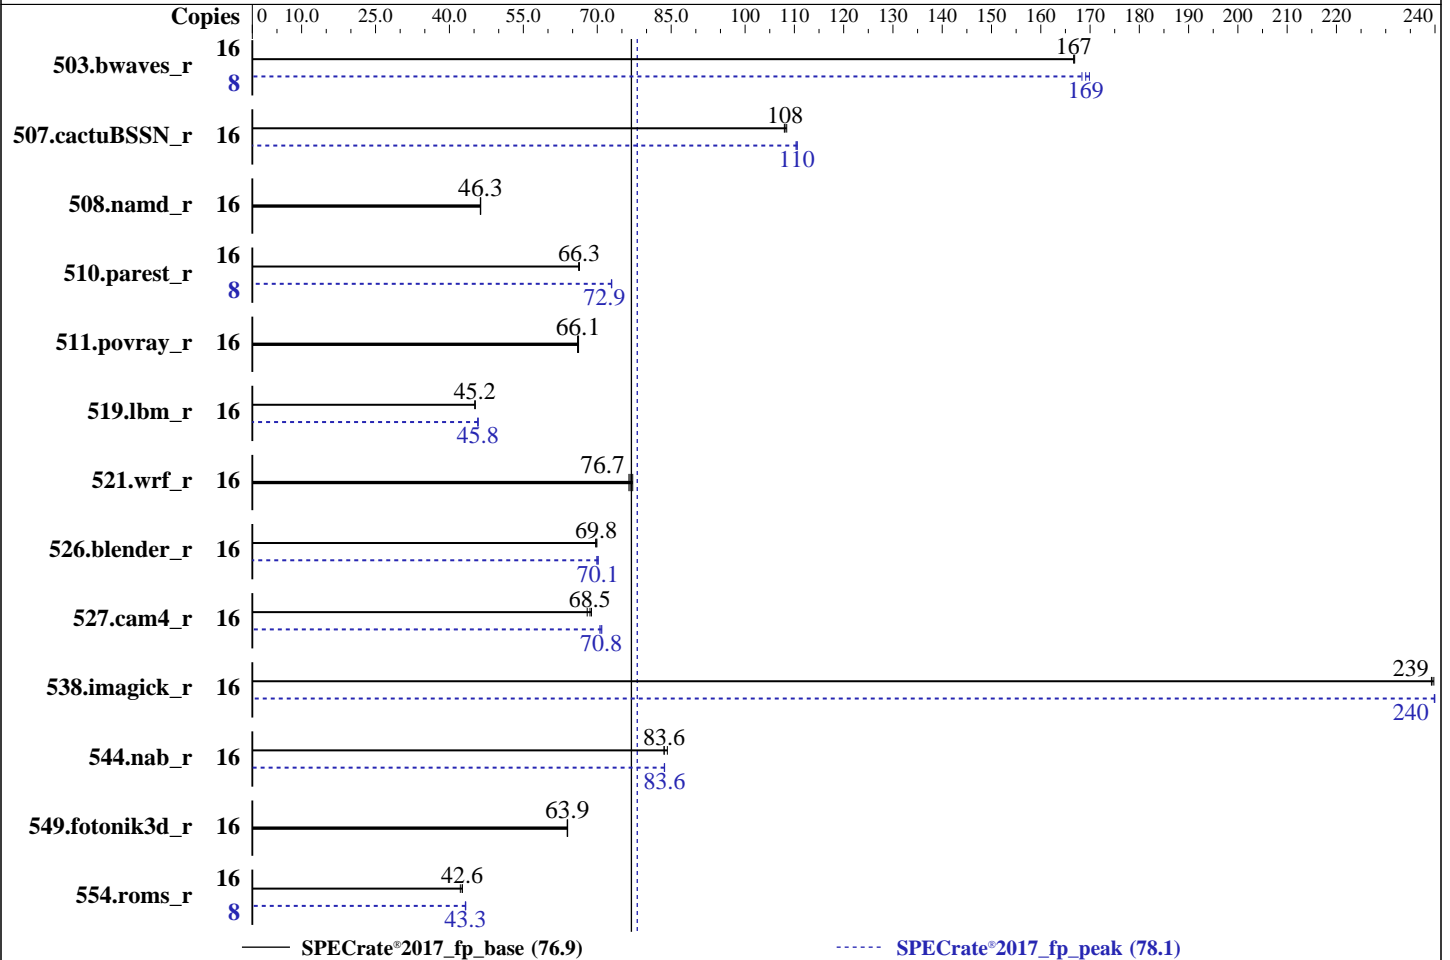

Hardware

CPU Name: AMD EPYC 7252
 Max MHz: 3200
 Nominal: 3100
 Enabled: 8 cores, 1 chip, 2 threads/core
 Orderable: 1 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 64 MB I+D on chip per chip,
 16 MB shared / 2 cores
 Other: None
 Memory: 1 TB (8 x 128 GB 4Rx4 PC4-3200V-L)
 Storage: 1 x 960 GB M.2 SSD SATA
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP3 (x86_64)
 kernel version
 5.3.18-57-default
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: No
 Firmware: Version 4.2.1c released Aug-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	962	167	963	167	961	167	8	477	168	474	169	472	170
507.cactuBSSN_r	16	187	108	188	108	187	108	16	183	110	183	111	184	110
508.namd_r	16	328	46.3	329	46.3	328	46.3	16	328	46.3	329	46.3	328	46.3
510.parest_r	16	631	66.4	632	66.2	631	66.3	8	287	72.9	287	72.9	287	72.9
511.povray_r	16	566	66.0	565	66.1	564	66.2	16	566	66.0	565	66.1	564	66.2
519.lbm_r	16	373	45.2	373	45.2	373	45.2	16	368	45.8	368	45.8	368	45.8
521.wrf_r	16	464	77.2	467	76.7	469	76.4	16	464	77.2	467	76.7	469	76.4
526.blender_r	16	350	69.7	349	69.8	348	69.9	16	347	70.2	348	70.1	349	69.9
527.cam4_r	16	412	68.0	408	68.5	407	68.8	16	395	70.9	397	70.5	395	70.8
538.imagick_r	16	166	240	166	239	166	239	16	166	240	166	240	166	240
544.nab_r	16	320	84.2	322	83.6	322	83.6	16	322	83.7	322	83.6	322	83.6
549.fotonik3d_r	16	974	64.0	975	63.9	975	63.9	16	974	64.0	975	63.9	975	63.9
554.roms_r	16	596	42.6	597	42.6	602	42.2	8	294	43.3	294	43.2	294	43.3

SPECrate®2017_fp_base = **76.9**

SPECrate®2017_fp_peak = **78.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2017/amd_rate_aocc300_milan_B_lib/lib;/home/cpu2017/amd_rate_a  
    occ300_milan_B_lib/lib32:"  
MALLOCONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration

SMT Mode set to Auto

NUMA nodes per socket set to NPS4

ACPI SRAT L3 Cache As NUMA Domain set to Enabled

DRAM Scrub Time set to Disabled

Determinism Slider set to Power

Memory Interleaving set to Auto

APBDIS set to 1

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Platform Notes (Continued)

sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Wed Dec 15 23:03:25 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7252 8-Core Processor
 1 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 4 5 8 9 12 13
```

From lscpu from util-linux 2.36.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 43 bits physical, 48 bits virtual
CPU(s): 16
On-line CPU(s) list: 0-15
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 1
NUMA node(s): 1
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7252 8-Core Processor
Stepping: 0
Frequency boost: enabled
CPU MHz: 3190.868
CPU max MHz: 3100.0000
CPU min MHz: 1500.0000
BogoMIPS: 6187.84
Virtualization: AMD-V
L1d cache: 256 KiB
L1i cache: 256 KiB
L2 cache: 4 MiB
L3 cache: 64 MiB
NUMA node0 CPU(s): 0-15
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Date: Dec-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

Platform Notes (Continued)

Vulnerability Mds: Not affected
 Vulnerability Meltdown: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
 Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP conditional, RSB filling
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected
 Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall sev_es fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	256K	8	Data	1	64	1	64
L1i	32K	256K	8	Instruction	1	64	1	64
L2	512K	4M	8	Unified	2	1024	1	64
L3	16M	64M	16	Unified	3	16384	1	64

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.
 available: 1 nodes (0)
 node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 node 0 size: 1019477 MB
 node 0 free: 1018851 MB
 node distances:
 node 0
 0: 10

From /proc/meminfo

MemTotal: 1043944960 kB
 HugePages_Total: 0
 Hugepagesize: 2048 kB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Platform Notes (Continued)

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

os-release:

NAME="SLES"

VERSION="15-SP3"

VERSION_ID="15.3"

PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"

ID="sles"

ID_LIKE="suse"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:15:sp3"

uname -a:

Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9) x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swappgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling):

Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

run-level 3 Dec 15 16:16

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	223G	11G	213G	5%	/

From /sys/devices/virtual/dmi/id

Vendor: Cisco Systems Inc

Product: UCSC-C225-M6N

Serial: WZP25230TMR

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Platform Notes (Continued)

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x 0xCE00 M386AAG40AM3-CWE 128 GB 4 rank 3200

BIOS:

BIOS Vendor: Cisco Systems Inc

BIOS Version: C225M6.4.2.1c.0.0806211349

BIOS Date: 08/06/2021

BIOS Revision: 5.14

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)  
 | 544.nab_r(base, peak)  
=====
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
=====
```

```
=====  
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)  
=====
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
=====
```

```
=====  
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)  
=====
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Compiler Version Notes (Continued)

```

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

```

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

```

=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

```

=====
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64

527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Peak Optimization Flags (Continued)

503.bwaves_r (continued):

```
-march=znver3 -fveclib=AMDLIBM -Kieeee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang -lflangrti
```

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieeee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
-ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -ffast-math
-funroll-loops -mllvm -extra-vectorizer-passes
-mllvm -lsr-in-nested-loop -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

```
526.blender_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Peak Optimization Flags (Continued)

526.blender_r (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -finline-aggressive
-mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Kieee -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti
```

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate®2017_fp_base = 76.9

Cisco UCS C225 M6 (AMD EPYC 7252 8-Core)

SPECrate®2017_fp_peak = 78.1

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-12-16 02:03:24-0500.

Report generated on 2022-01-05 13:34:09 by CPU2017 PDF formatter v6442.

Originally published on 2022-01-04.