



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 13.6

Cisco UCS C225 M6 (AMD EPYC 73F3 16-Core)

SPECspeed®2017\_int\_peak = 13.7

CPU2017 License: 9019


Test Date: Dec-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

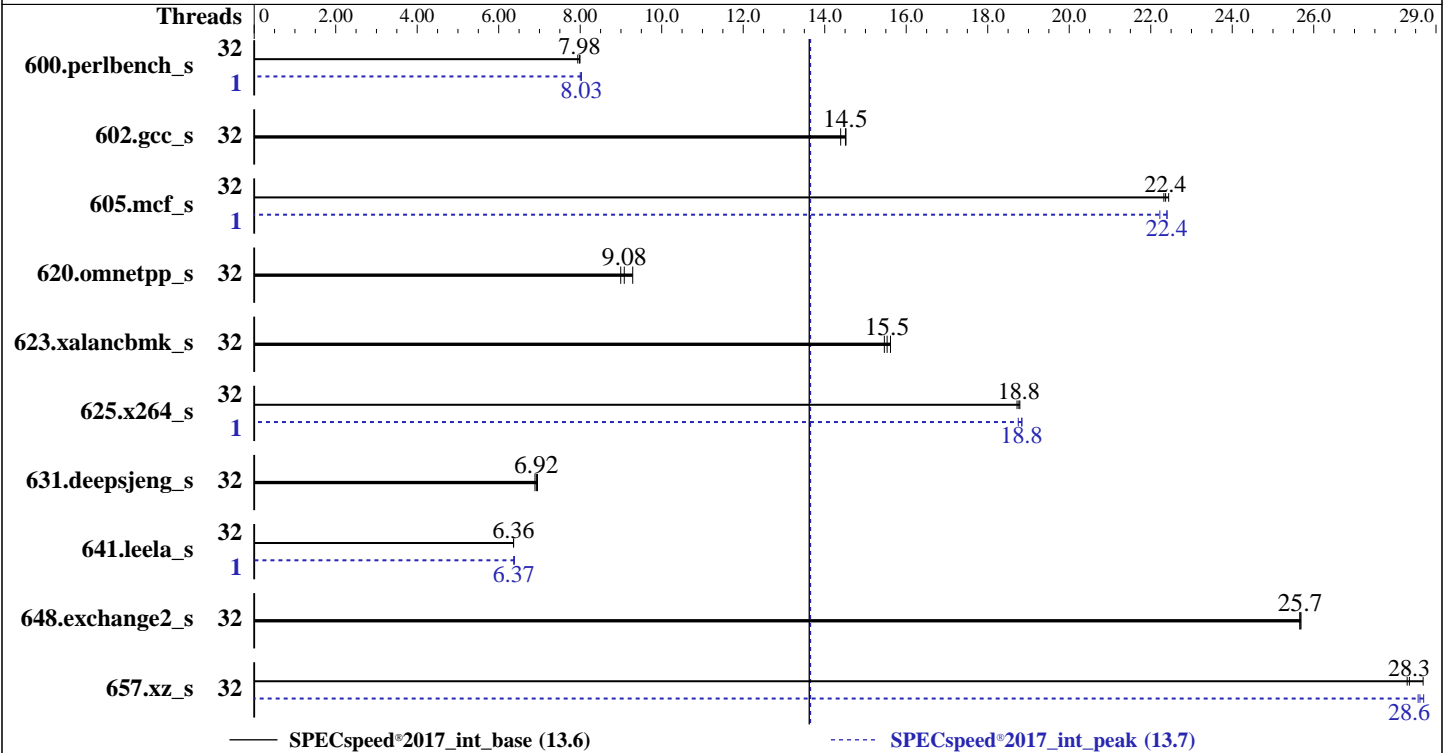

### Hardware

CPU Name: AMD EPYC 73F3  
 Max MHz: 4000  
 Nominal: 3500  
 Enabled: 32 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 2 cores  
 Other: None  
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200V-L)  
 Storage: 1 x 960 GB M.2 SSD SATA  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP3 (x86\_64)  
 kernel version 5.3.18-57-default  
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 4.2.1c released Aug-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 13.6

Cisco UCS C225 M6 (AMD EPYC 73F3 16-Core)

SPECspeed®2017\_int\_peak = 13.7

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	224	7.94	<u>222</u>	<u>7.98</u>	222	8.00	1	221	8.03	222	8.00	<u>221</u>	<u>8.03</u>
602.gcc_s	32	<u>274</u>	<u>14.5</u>	274	14.5	277	14.4	32	<u>274</u>	<u>14.5</u>	274	14.5	277	14.4
605.mcf_s	32	<u>211</u>	<u>22.4</u>	210	22.4	211	22.3	1	212	22.2	<u>211</u>	<u>22.4</u>	211	22.4
620.omnetpp_s	32	181	8.99	<u>180</u>	<u>9.08</u>	176	9.29	32	181	8.99	<u>180</u>	<u>9.08</u>	176	9.29
623.xalancbmk_s	32	91.6	15.5	90.8	15.6	<u>91.2</u>	<u>15.5</u>	32	91.6	15.5	90.8	15.6	<u>91.2</u>	<u>15.5</u>
625.x264_s	32	94.2	18.7	<u>94.0</u>	<u>18.8</u>	93.9	18.8	1	<u>93.7</u>	<u>18.8</u>	93.6	18.8	94.1	18.7
631.deepsjeng_s	32	208	6.89	206	6.95	<u>207</u>	<u>6.92</u>	32	208	6.89	206	6.95	<u>207</u>	<u>6.92</u>
641.leela_s	32	268	6.36	268	6.37	<u>268</u>	<u>6.36</u>	1	267	6.39	268	6.37	<u>268</u>	<u>6.37</u>
648.exchange2_s	32	<u>115</u>	<u>25.7</u>	115	25.7	114	25.7	32	<u>115</u>	<u>25.7</u>	115	25.7	114	25.7
657.xz_s	32	218	28.3	216	28.7	<u>218</u>	<u>28.3</u>	32	<u>216</u>	<u>28.6</u>	215	28.7	216	28.6

SPECspeed®2017\_int\_base = **13.6**

SPECspeed®2017\_int\_peak = **13.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_int\_base = 13.6

Cisco UCS C225 M6 (AMD EPYC 73F3 16-Core)

SPECspeed®2017\_int\_peak = 13.7

CPU2017 License: 9019

Test Date: Dec-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:  
GOMP_CPU_AFFINITY = "0-31"  
LD_LIBRARY_PATH =  
    "/home/cpu2017/amd_speed_aocc300_milan_B_lib/lib;/home/cpu2017/amd_speed  
    _aocc300_milan_B_lib/lib32:"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "32"
```

```
Environment variables set by runcpu during the 600.perlbench_s peak run:  
GOMP_CPU_AFFINITY = "0"
```

```
Environment variables set by runcpu during the 605.mcf_s peak run:  
GOMP_CPU_AFFINITY = "0"
```

```
Environment variables set by runcpu during the 625.x264_s peak run:  
GOMP_CPU_AFFINITY = "0"
```

```
Environment variables set by runcpu during the 641.leela_s peak run:  
GOMP_CPU_AFFINITY = "0"
```

```
Environment variables set by runcpu during the 657.xz_s peak run:  
GOMP_CPU_AFFINITY = "0-31"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 13.6

Cisco UCS C225 M6 (AMD EPYC 73F3 16-Core)

SPECspeed®2017\_int\_peak = 13.7

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Dec-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

### General Notes (Continued)

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

### Platform Notes

SMT Mode set to Disabled  
NUMA nodes per socket set to NPS1  
ACPI SRAT L3 Cache As NUMA Domain set to Enabled  
DRAM Scrub Time set to Disabled  
Determinism Slider set to Power  
L1 Stream HW Prefetcher set to Enabled  
APBDIS set to 1

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost Tue Dec 7 07:40:04 2021

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 73F3 16-Core Processor  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 16  
siblings : 16  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu from util-linux 2.36.2:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
Address sizes: 48 bits physical, 48 bits virtual  
CPU(s): 32  
On-line CPU(s) list: 0-31  
Thread(s) per core: 1  
Core(s) per socket: 16  
Socket(s): 2  
NUMA node(s): 16  
Vendor ID: AuthenticAMD  
CPU family: 25  
Model: 1

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 13.6

Cisco UCS C225 M6 (AMD EPYC 73F3 16-Core)

SPECspeed®2017\_int\_peak = 13.7

CPU2017 License: 9019

Test Date: Dec-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

### Platform Notes (Continued)

```

Model name: AMD EPYC 73F3 16-Core Processor
Stepping: 1
Frequency boost: enabled
CPU MHz: 1495.923
CPU max MHz: 3500.0000
CPU min MHz: 1500.0000
BogoMIPS: 6986.27
Virtualization: AMD-V
L1d cache: 1 MiB
L1i cache: 1 MiB
L2 cache: 16 MiB
L3 cache: 512 MiB
NUMA node0 CPU(s): 0,1
NUMA node1 CPU(s): 2,3
NUMA node2 CPU(s): 4,5
NUMA node3 CPU(s): 6,7
NUMA node4 CPU(s): 8,9
NUMA node5 CPU(s): 10,11
NUMA node6 CPU(s): 12,13
NUMA node7 CPU(s): 14,15
NUMA node8 CPU(s): 16,17
NUMA node9 CPU(s): 18,19
NUMA node10 CPU(s): 20,21
NUMA node11 CPU(s): 22,23
NUMA node12 CPU(s): 24,25
NUMA node13 CPU(s): 26,27
NUMA node14 CPU(s): 28,29
NUMA node15 CPU(s): 30,31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 13.6

Cisco UCS C225 M6 (AMD EPYC 73F3 16-Core)

SPECspeed®2017\_int\_peak = 13.7

CPU2017 License: 9019

Test Date: Dec-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

### Platform Notes (Continued)

ibpb stibp vmcall fsgsbase bml avx2 smep bmi2 erms invpcid cqm rdt\_a rdseed adx smap clflushopt clwb sha\_ni xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local clzero irperf xsaveerptr wbnoinvd amd\_ppin arat npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold v\_vmsave\_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow\_recov succor smca fsrm

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	512K	16M	8	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

```
node 0 cpus: 0 1
node 0 size: 128763 MB
node 0 free: 126267 MB
node 1 cpus: 2 3
node 1 size: 129023 MB
node 1 free: 128885 MB
node 2 cpus: 4 5
node 2 size: 129023 MB
node 2 free: 128750 MB
node 3 cpus: 6 7
node 3 size: 129023 MB
node 3 free: 128786 MB
node 4 cpus: 8 9
node 4 size: 129023 MB
node 4 free: 128913 MB
node 5 cpus: 10 11
node 5 size: 129023 MB
node 5 free: 128893 MB
node 6 cpus: 12 13
node 6 size: 129023 MB
node 6 free: 128941 MB
node 7 cpus: 14 15
node 7 size: 116910 MB
node 7 free: 116842 MB
node 8 cpus: 16 17
node 8 size: 129023 MB
node 8 free: 128848 MB
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 13.6

Cisco UCS C225 M6 (AMD EPYC 73F3 16-Core)

SPECspeed®2017\_int\_peak = 13.7

CPU2017 License: 9019

Test Date: Dec-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

### Platform Notes (Continued)

```

node 9 cpus: 18 19
node 9 size: 129023 MB
node 9 free: 127290 MB
node 10 cpus: 20 21
node 10 size: 129023 MB
node 10 free: 128335 MB
node 11 cpus: 22 23
node 11 size: 129023 MB
node 11 free: 128377 MB
node 12 cpus: 24 25
node 12 size: 128989 MB
node 12 free: 128690 MB
node 13 cpus: 26 27
node 13 size: 129023 MB
node 13 free: 128111 MB
node 14 cpus: 28 29
node 14 size: 129023 MB
node 14 free: 128799 MB
node 15 cpus: 30 31
node 15 size: 128791 MB
node 15 free: 128520 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 11 11 11 11 11 11 11 32 32 32 32 32 32 32 32
1:  11 10 11 11 11 11 11 11 32 32 32 32 32 32 32 32
2:  11 11 10 11 11 11 11 11 32 32 32 32 32 32 32 32
3:  11 11 11 10 11 11 11 11 32 32 32 32 32 32 32 32
4:  11 11 11 11 10 11 11 11 32 32 32 32 32 32 32 32
5:  11 11 11 11 11 10 11 11 32 32 32 32 32 32 32 32
6:  11 11 11 11 11 11 10 11 32 32 32 32 32 32 32 32
7:  11 11 11 11 11 11 11 10 32 32 32 32 32 32 32 32
8:  32 32 32 32 32 32 32 32 10 11 11 11 11 11 11 11
9:  32 32 32 32 32 32 32 32 11 10 11 11 11 11 11 11
10: 32 32 32 32 32 32 32 32 11 11 10 11 11 11 11 11
11: 32 32 32 32 32 32 32 32 11 11 11 10 11 11 11 11
12: 32 32 32 32 32 32 32 32 11 11 11 11 10 11 11 11
13: 32 32 32 32 32 32 32 32 11 11 11 11 11 10 11 11
14: 32 32 32 32 32 32 32 32 11 11 11 11 11 11 10 11
15: 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 10

```

```

From /proc/meminfo
MemTotal:      2100973492 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
ondemand

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 13.6

Cisco UCS C225 M6 (AMD EPYC 73F3 16-Core)

SPECspeed®2017\_int\_peak = 13.7

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Dec-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Platform Notes (Continued)

From /etc/\*release\* /etc/\*version\*

os-release:

```
NAME="SLES"
VERSION="15-SP3"
VERSION_ID="15.3"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp3"
```

uname -a:

```
Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swappg barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Dec 7 04:17

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb3	xfs	181G	18G	164G	10%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Cisco Systems Inc
Product:	UCSC-C225-M6S
Serial:	WZP25230TN2

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 13.6

Cisco UCS C225 M6 (AMD EPYC 73F3 16-Core)

SPECspeed®2017\_int\_peak = 13.7

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Dec-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

### Platform Notes (Continued)

allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 0xCE00 M386AAG40AM3-CWE 128 GB 4 rank 3200

BIOS:

BIOS Vendor: Cisco Systems, Inc.

BIOS Version: C225M6.4.2.1c.0.0806211349

BIOS Date: 08/06/2021

BIOS Revision: 5.22

(End of data from sysinfo program)

### Compiler Version Notes

```

=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
=====

```

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

=====
C++   | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
      | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

```

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

=====
Fortran | 648.exchange2_s(base, peak)
=====

```

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_int\_base = 13.6

Cisco UCS C225 M6 (AMD EPYC 73F3 16-Core)

SPECspeed®2017\_int\_peak = 13.7

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

```

C++ benchmarks:

```

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_int\_base = 13.6

Cisco UCS C225 M6 (AMD EPYC 73F3 16-Core)

SPECspeed®2017\_int\_peak = 13.7

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_int\_base = 13.6

Cisco UCS C225 M6 (AMD EPYC 73F3 16-Core)

SPECspeed®2017\_int\_peak = 13.7

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```

600.perlbench_s: -m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

```

602.gcc\_s: basepeak = yes

605.mcf\_s: Same as 600.perlbench\_s

625.x264\_s: Same as 600.perlbench\_s

657.xz\_s: Same as 600.perlbench\_s

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 13.6

Cisco UCS C225 M6 (AMD EPYC 73F3 16-Core)

SPECspeed®2017\_int\_peak = 13.7

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Dec-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Peak Optimization Flags (Continued)

631.deepsjeng\_s: basepeak = yes

```

641.leela_s: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

```

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revC.xml>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 13.6

Cisco UCS C225 M6 (AMD EPYC 73F3 16-Core)

SPECspeed®2017\_int\_peak = 13.7

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Dec-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-12-07 10:40:04-0500.

Report generated on 2022-01-05 13:33:30 by CPU2017 PDF formatter v6442.

Originally published on 2022-01-04.