



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

SPECrate®2017_fp_peak = 405

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

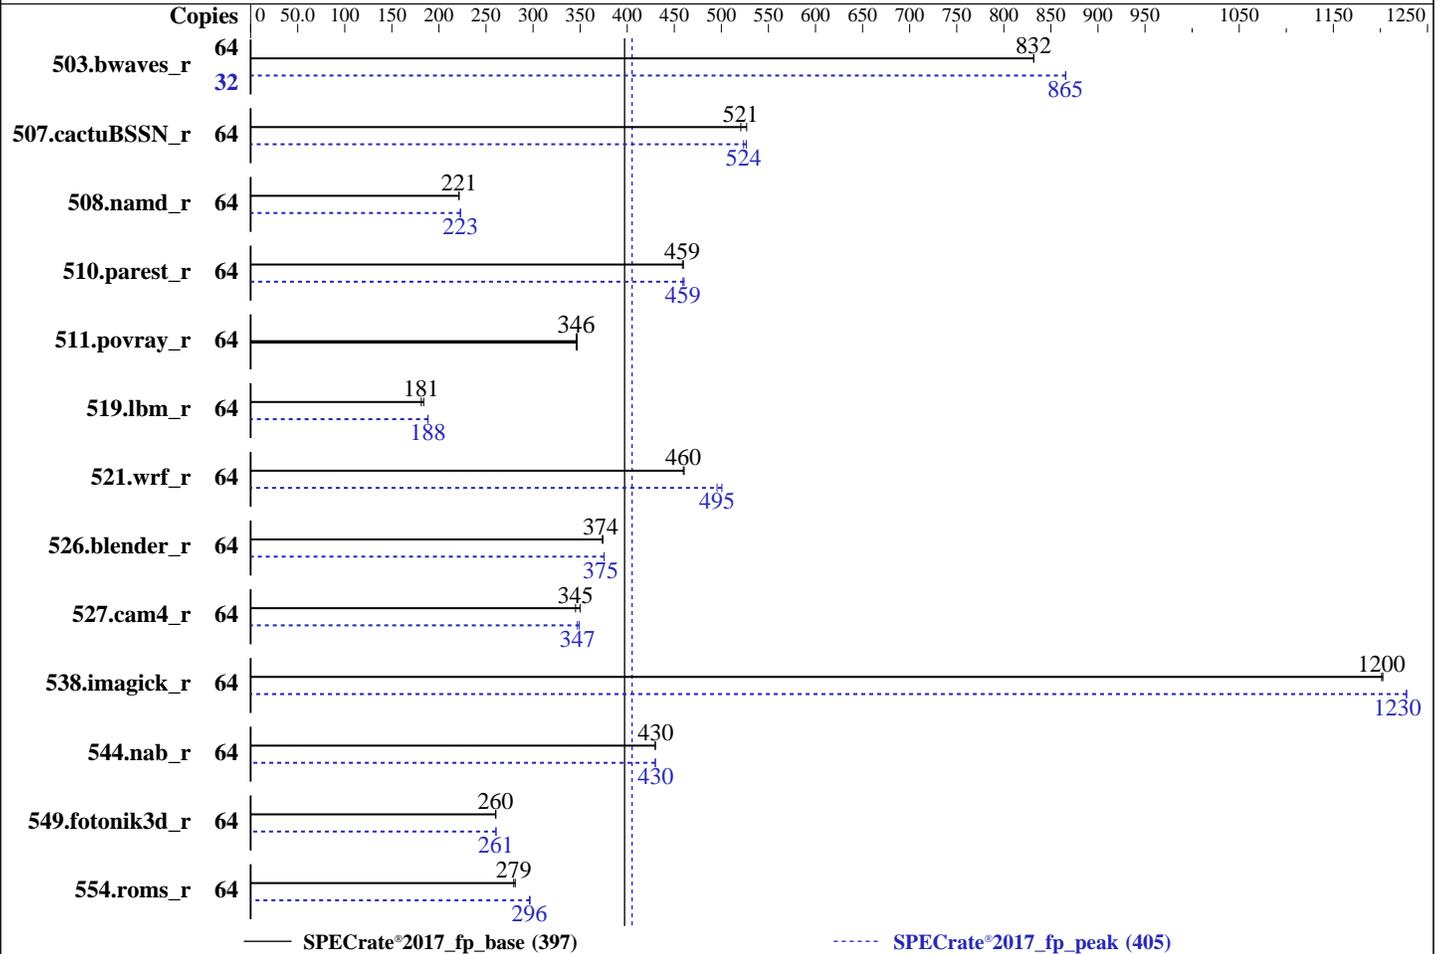

Hardware

CPU Name: AMD EPYC 7373X
 Max MHz: 3800
 Nominal: 3050
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 768 MB I+D on chip per chip, 96 MB shared / 2 cores
 Other: None
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)
 Storage: 125 GB on tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)
 4.18.0-240.el8.x86_64
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
 Parallel: No
 Firmware: Version 2.6.5 released Dec-2021
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	<u>772</u>	<u>832</u>	771	832			32	371	866	<u>371</u>	<u>865</u>		
507.cactuBSSN_r	64	154	527	<u>156</u>	<u>521</u>			64	<u>155</u>	<u>524</u>	154	526		
508.namd_r	64	<u>275</u>	<u>221</u>	275	221			64	273	223	<u>273</u>	<u>223</u>		
510.parest_r	64	<u>365</u>	<u>459</u>	364	460			64	364	460	<u>365</u>	<u>459</u>		
511.povray_r	64	431	347	<u>432</u>	<u>346</u>			64	431	347	<u>432</u>	<u>346</u>		
519.lbm_r	64	367	184	<u>372</u>	<u>181</u>			64	358	188	<u>358</u>	<u>188</u>		
521.wrf_r	64	311	460	<u>312</u>	<u>460</u>			64	286	501	<u>289</u>	<u>495</u>		
526.blender_r	64	<u>261</u>	<u>374</u>	261	374			64	<u>260</u>	<u>375</u>	260	375		
527.cam4_r	64	320	350	<u>324</u>	<u>345</u>			64	<u>323</u>	<u>347</u>	321	349		
538.imagick_r	64	<u>132</u>	<u>1200</u>	132	1200			64	130	1230	<u>130</u>	<u>1230</u>		
544.nab_r	64	<u>251</u>	<u>430</u>	251	430			64	<u>251</u>	<u>430</u>	251	430		
549.fotonik3d_r	64	957	261	<u>959</u>	<u>260</u>			64	<u>957</u>	<u>261</u>	957	261		
554.roms_r	64	<u>364</u>	<u>279</u>	362	281			64	343	297	<u>343</u>	<u>296</u>		

SPECrate®2017_fp_base = **397**

SPECrate®2017_fp_peak = **405**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/mnt/ramdisk/cpu2017-1.1.8-aocc320-A1/amd_rate_aocc320_milanx_A_lib/lib  
    ;/mnt/ramdisk/cpu2017-1.1.8-aocc320-A1/amd_rate_aocc320_milanx_A_lib/lib  
    32:"  
MALLOCONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

NUMA Nodes per Socket : 4

L3 Cache as NUMA Domain : Enabled

Virtualization Technology : Disabled

DRAM Refresh Delay : Performance

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes (Continued)

System Profile : Custom
 CPU Power Management : Maximum Performance
 Memory Patrol Scrub : Disabled
 PCI ASPM L1 Link
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-aocc320-A1/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost.localdomain Tue Feb 22 16:01:50 2022

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
 model name : AMD EPYC 7373X 16-Core Processor
 2 "physical id"s (chips)
 64 "processors"
 cores, siblings (Caution: counting these is hw and system dependent. The following
 excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
 cpu cores : 16
 siblings : 32
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu from util-linux 2.32.1:
 Architecture: x86_64
 CPU op-mode(s): 32-bit, 64-bit
 Byte Order: Little Endian
 CPU(s): 64
 On-line CPU(s) list: 0-63
 Thread(s) per core: 2
 Core(s) per socket: 16
 Socket(s): 2
 NUMA node(s): 16
 Vendor ID: AuthenticAMD
 CPU family: 25
 Model: 1
 Model name: AMD EPYC 7373X 16-Core Processor
 Stepping: 2
 CPU MHz: 1821.366
 BogoMIPS: 6088.24
 Virtualization: AMD-V
 L1d cache: 32K
 L1i cache: 32K
 L2 cache: 512K

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Platform Notes (Continued)

```

L3 cache:                98304K
NUMA node0 CPU(s):       0,1,32,33
NUMA node1 CPU(s):       2,3,34,35
NUMA node2 CPU(s):       4,5,36,37
NUMA node3 CPU(s):       6,7,38,39
NUMA node4 CPU(s):       8,9,40,41
NUMA node5 CPU(s):       10,11,42,43
NUMA node6 CPU(s):       12,13,44,45
NUMA node7 CPU(s):       14,15,46,47
NUMA node8 CPU(s):       16,17,48,49
NUMA node9 CPU(s):       18,19,50,51
NUMA node10 CPU(s):      20,21,52,53
NUMA node11 CPU(s):      22,23,54,55
NUMA node12 CPU(s):      24,25,56,57
NUMA node13 CPU(s):      26,27,58,59
NUMA node14 CPU(s):      28,29,60,61
NUMA node15 CPU(s):      30,31,62,63

```

```

Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb
sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_omsave_vmload vgif unip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 16 nodes (0-15)
node 0 cpus: 0 1 32 33
node 0 size: 128062 MB
node 0 free: 127948 MB
node 1 cpus: 2 3 34 35
node 1 size: 129006 MB
node 1 free: 128943 MB
node 2 cpus: 4 5 36 37
node 2 size: 129018 MB
node 2 free: 128791 MB
node 3 cpus: 6 7 38 39
node 3 size: 129000 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes (Continued)

```

node 3 free: 128890 MB
node 4 cpus: 8 9 40 41
node 4 size: 129014 MB
node 4 free: 125511 MB
node 5 cpus: 10 11 42 43
node 5 size: 129004 MB
node 5 free: 128911 MB
node 6 cpus: 12 13 44 45
node 6 size: 128977 MB
node 6 free: 128812 MB
node 7 cpus: 14 15 46 47
node 7 size: 129000 MB
node 7 free: 128552 MB
node 8 cpus: 16 17 48 49
node 8 size: 129004 MB
node 8 free: 128803 MB
node 9 cpus: 18 19 50 51
node 9 size: 129002 MB
node 9 free: 128949 MB
node 10 cpus: 20 21 52 53
node 10 size: 128996 MB
node 10 free: 128950 MB
node 11 cpus: 22 23 54 55
node 11 size: 128984 MB
node 11 free: 128943 MB
node 12 cpus: 24 25 56 57
node 12 size: 129002 MB
node 12 free: 128953 MB
node 13 cpus: 26 27 58 59
node 13 size: 128994 MB
node 13 free: 128951 MB
node 14 cpus: 28 29 60 61
node 14 size: 129000 MB
node 14 free: 128953 MB
node 15 cpus: 30 31 62 63
node 15 size: 128997 MB
node 15 free: 128947 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
  0: 10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
  1: 11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
  2: 12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
  3: 12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
  4: 12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
  5: 12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32
  6: 12 12 12 12 12 12 10 11 32 32 32 32 32 32 32 32
  7: 12 12 12 12 12 12 11 10 32 32 32 32 32 32 32 32

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Platform Notes (Continued)

8:	32	32	32	32	32	32	32	32	10	11	12	12	12	12	12	12
9:	32	32	32	32	32	32	32	32	11	10	12	12	12	12	12	12
10:	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12	12
11:	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12
12:	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12	12
13:	32	32	32	32	32	32	32	32	12	12	12	12	11	10	12	12
14:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	10	11
15:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	11	10

From /proc/meminfo

```
MemTotal:      2112870684 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/sbin/tuned-adm active

Current active profile: throughput-performance

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit):      Not affected
CVE-2018-3620 (L1 Terminal Fault):   Not affected
Microarchitectural Data Sampling:   Not affected
CVE-2017-5754 (Meltdown):           Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):  Mitigation: usercopy/swapgs barriers and __user pointer sanitization
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Nov 25 11:42

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-aocc320-A1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	125G	3.3G	122G	3%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

Vendor: Dell Inc.

Product: PowerEdge R7525

Product Family: PowerEdge

Serial: GK2D853

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 802C8632802C 72ASS16G72LZ-3G2B3 128 GB 4 rank 3200

16x Not Specified Not Specified

BIOS:

BIOS Vendor: Dell Inc.

BIOS Version: 2.6.5

BIOS Date: 12/28/2021

BIOS Revision: 2.6

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
=====
```

```
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Compiler Version Notes (Continued)

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang

```

C++ benchmarks:

```

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -Hz,1,0x1 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loop-fusion
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -z muldefs -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Peak Optimization Flags (Continued)

519.lbm_r (continued):

```
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

```
510.parest_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

Fortran benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Peak Optimization Flags (Continued)

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang
```

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang
```

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
-ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Mrecursive -lamdlibm
-ljemalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Peak Optimization Flags (Continued)

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-Mrecursive -Hz,1,0x1 -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

```
526.blender_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -finline-aggressive
-mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -flv-function-specialization
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Mrecursive -lamdlibm -ljemalloc
-lflang
```

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.4.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 397

PowerEdge R7525 (AMD EPYC 7373X 16-Core Processor)

SPECrate®2017_fp_peak = 405

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-22 17:01:49-0500.

Report generated on 2022-03-21 16:19:23 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-21.