



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 281

PowerEdge R650 (Intel Xeon Silver 4316, 2.30 GHz)

SPECrate®2017\_int\_peak = 290

CPU2017 License: 55


Test Date: Mar-2022

Test Sponsor: Dell Inc.

Hardware Availability: May-2021

Tested by: Dell Inc.

Software Availability: Dec-2021

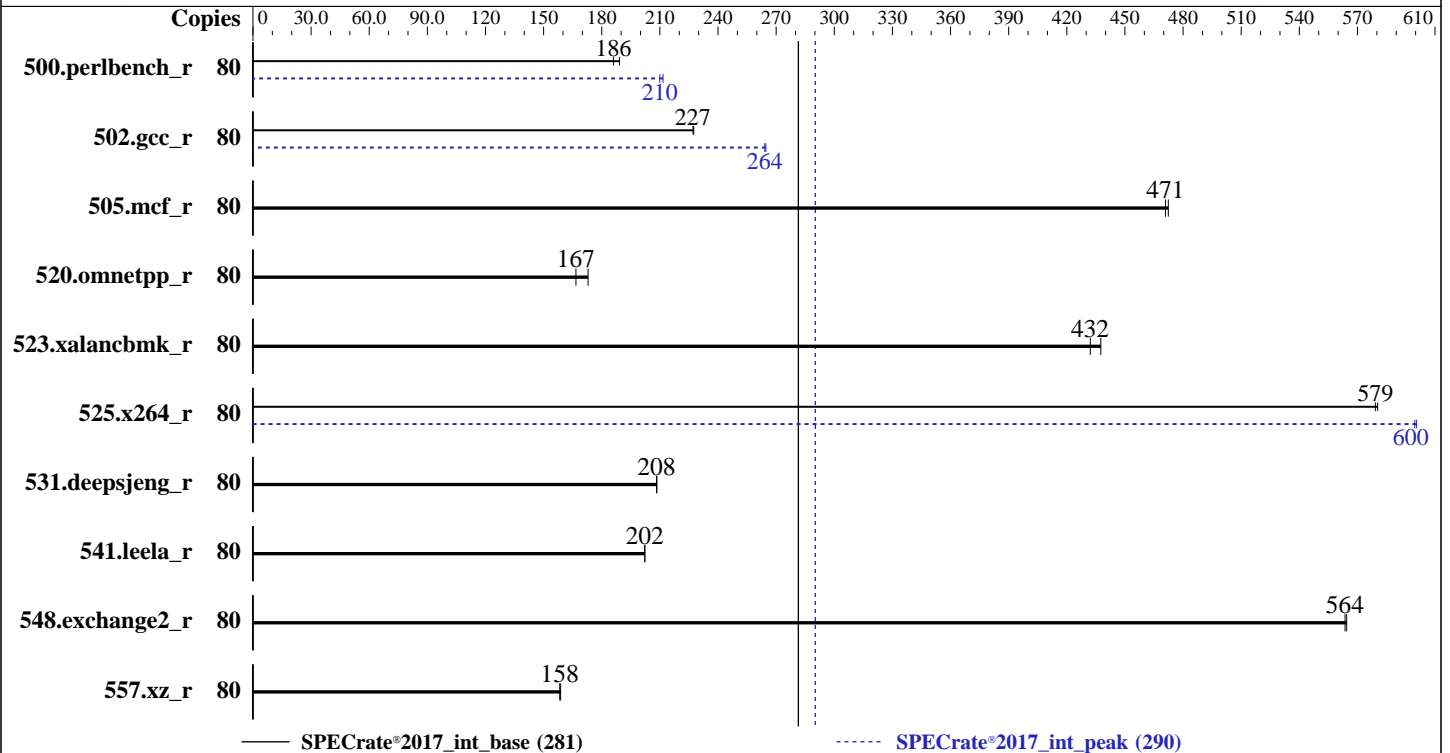

### Hardware

CPU Name: Intel Xeon Silver 4316  
 Max MHz: 3400  
 Nominal: 2300  
 Enabled: 40 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 30 MB I+D on chip per chip  
 Other: None  
 Memory: 2 TB (32 x 64 GB 2Rx4 PC4-3200AA-R, running at 2666)  
 Storage: 125 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
 4.18.0-240.el8.x86\_64  
 Compiler: C/C++: Version 2022.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2021.5 of Intel Fortran Compiler Classic for Linux;  
 C/C++: Version 2021.5 of Intel C/C++ Compiler Classic for Linux  
 Parallel: No  
 Firmware: Version 1.4.4 released Oct-2021  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 281

PowerEdge R650 (Intel Xeon Silver 4316, 2.30 GHz)

SPECrate®2017\_int\_peak = 290

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	<b>684</b>	<b>186</b>	673	189			80	<b>607</b>	<b>210</b>	602	212		
502.gcc_r	80	<b>499</b>	<b>227</b>	498	227			80	<b>429</b>	<b>264</b>	428	265		
505.mcf_r	80	274	472	<b>275</b>	<b>471</b>			80	274	472	<b>275</b>	<b>471</b>		
520.omnetpp_r	80	<b>630</b>	<b>167</b>	607	173			80	<b>630</b>	<b>167</b>	607	173		
523.xalancbmk_r	80	<b>196</b>	<b>432</b>	193	438			80	<b>196</b>	<b>432</b>	193	438		
525.x264_r	80	<b>242</b>	<b>579</b>	241	580			80	233	601	<b>234</b>	<b>600</b>		
531.deepsjeng_r	80	<b>440</b>	<b>208</b>	440	208			80	<b>440</b>	<b>208</b>	440	208		
541.leela_r	80	655	202	<b>655</b>	<b>202</b>			80	655	202	<b>655</b>	<b>202</b>		
548.exchange2_r	80	371	564	<b>372</b>	<b>564</b>			80	371	564	<b>372</b>	<b>564</b>		
557.xz_r	80	544	159	<b>546</b>	<b>158</b>			80	544	159	<b>546</b>	<b>158</b>		

SPECrate®2017\_int\_base = 281

SPECrate®2017\_int\_peak = 290

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

"/mnt/ramdisk/cpu2017-1.1.8-ic2022.0/lib/intel64:/mnt/ramdisk/cpu2017-1.

1.8-ic2022.0/lib/ia32:/mnt/ramdisk/cpu2017-1.1.8-ic2022.0/je5.0.1-32"

MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 281

PowerEdge R650 (Intel Xeon Silver 4316, 2.30 GHz)

SPECrate®2017\_int\_peak = 290

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

## General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

Sub NUMA Cluster : 2-Way Clustering  
Virtualization Technology : Disabled

System Profile : Custom  
CPU Power Management : Maximum Performance  
C1E : Disabled  
C States : Autonomous  
Memory Patrol Scrub : Disabled  
Energy Efficiency Policy : Performance  
CPU Interconnect Bus Link  
Power Management : Disabled  
PCI ASPM L1 Link  
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2022.0/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on rhel-8-3-amd Tue Mar 1 16:30:06 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4316 CPU @ 2.30GHz  
2 "physical id"s (chips)  
80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 281

PowerEdge R650 (Intel Xeon Silver 4316, 2.30 GHz)

SPECrate®2017\_int\_peak = 290

CPU2017 License: 55

Test Date: Mar-2022

Test Sponsor: Dell Inc.

Hardware Availability: May-2021

Tested by: Dell Inc.

Software Availability: Dec-2021

## Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

From lscpu from util-linux 2.32.1:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 80

On-line CPU(s) list: 0-79

Thread(s) per core: 2

Core(s) per socket: 20

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 106

Model name: Intel(R) Xeon(R) Silver 4316 CPU @ 2.30GHz

Stepping: 6

CPU MHz: 2800.000

BogoMIPS: 4600.00

Virtualization: VT-x

L1d cache: 48K

L1i cache: 32K

L2 cache: 1280K

L3 cache: 30720K

NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76

NUMA node1 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78

NUMA node2 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77

NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov

pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp

lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid

aperfmpperf pni pclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm

pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c

rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 invpcid\_single intel\_ppin

ssbd mba ibrs ibpb stibp ibrs\_enhanced fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2

erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb

intel\_pt avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc

cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local split\_lock\_detect wbnoinvd dtherm ida arat

pln pts avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni

avx512\_bitalg tme avx512\_vpopcntdq la57 rdpid md\_clear pconfig flush\_l1d

arch\_capabilities

/proc/cpuinfo cache data

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 281

PowerEdge R650 (Intel Xeon Silver 4316, 2.30 GHz)

SPECrate®2017\_int\_peak = 290

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

## Platform Notes (Continued)

cache size : 30720 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76

node 0 size: 505275 MB

node 0 free: 509226 MB

node 1 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78

node 1 size: 505836 MB

node 1 free: 511137 MB

node 2 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77

node 2 size: 505575 MB

node 2 free: 511702 MB

node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79

node 3 size: 505872 MB

node 3 free: 505743 MB

node distances:

node 0 1 2 3

0: 10 11 20 20

1: 11 10 20 20

2: 20 20 10 11

3: 20 20 11 10

From /proc/meminfo

MemTotal: 2113116384 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.3 (Ootpa)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="8.3"

PLATFORM\_ID="platform:el8"

PRETTY\_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.3:ga

uname -a:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 281

PowerEdge R650 (Intel Xeon Silver 4316, 2.30 GHz)

SPECrate®2017\_int\_peak = 290

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

## Platform Notes (Continued)

Linux rhel-8-3-amd 4.18.0-240.el8.x86\_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Mar 1 14:09

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2022.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	125G	3.7G	122G	3%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

Vendor:	Dell Inc.
Product:	PowerEdge R650
Product Family:	PowerEdge
Serial:	DFLTSTG

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

31x 002C069D002C 36ASF8G72PZ-3G2B2	64 GB	2 rank	3200, configured at 2666
1x 00AD063200AD HMAA8GR7AJR4N-XN	64 GB	2 rank	3200, configured at 2666

BIOS:

BIOS Vendor:	Dell Inc.
BIOS Version:	1.4.4
BIOS Date:	10/07/2021
BIOS Revision:	1.4

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 281

PowerEdge R650 (Intel Xeon Silver 4316, 2.30 GHz)

SPECrate®2017\_int\_peak = 290

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

## Compiler Version Notes

=====  
C | 500.perlbench\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.5.0 Build 20211109\_000000  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.0.0 Build 20211123  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.0.0 Build 20211123  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.5.0 Build 20211109\_000000  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.0.0 Build 20211123  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.0.0 Build 20211123

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 281

PowerEdge R650 (Intel Xeon Silver 4316, 2.30 GHz)

SPECrate®2017\_int\_peak = 290

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

## Compiler Version Notes (Continued)

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.5.0 Build 20211109\_000000

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.0.0 Build 20211123

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.0.0 Build 20211123

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.0.0 Build 20211123

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Fortran | 548.exchange2\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.5.0 Build 20211109\_000000

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 281

PowerEdge R650 (Intel Xeon Silver 4316, 2.30 GHz)

SPECrate®2017\_int\_peak = 290

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2022.0.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2022.0.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 281

PowerEdge R650 (Intel Xeon Silver 4316, 2.30 GHz)

SPECrate®2017\_int\_peak = 290

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-L/opt/intel/oneapi/compiler/2022.0.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench\_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)  
-xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2022.0.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 281

PowerEdge R650 (Intel Xeon Silver 4316, 2.30 GHz)

SPECrate®2017\_int\_peak = 290

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

## Peak Optimization Flags (Continued)

502.gcc\_r: -m32

```
-L/usr/local/intel/compiler/2022.0.0/linux/compiler/lib/ia32_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto  
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

525.x264\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto

```
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2022.0.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Dell-ic2022-linux64-v1.0.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Dell-ic2022-linux64-v1.0.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.5.xml>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 281

PowerEdge R650 (Intel Xeon Silver 4316, 2.30 GHz)

SPECrate®2017\_int\_peak = 290

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-03-01 17:29:55-0500.

Report generated on 2022-03-29 18:00:29 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-29.