



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

### Inspur NF5280A6 (AMD EPYC 7763)

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jul-2022

Hardware Availability: Aug-2022

Software Availability: Dec-2021

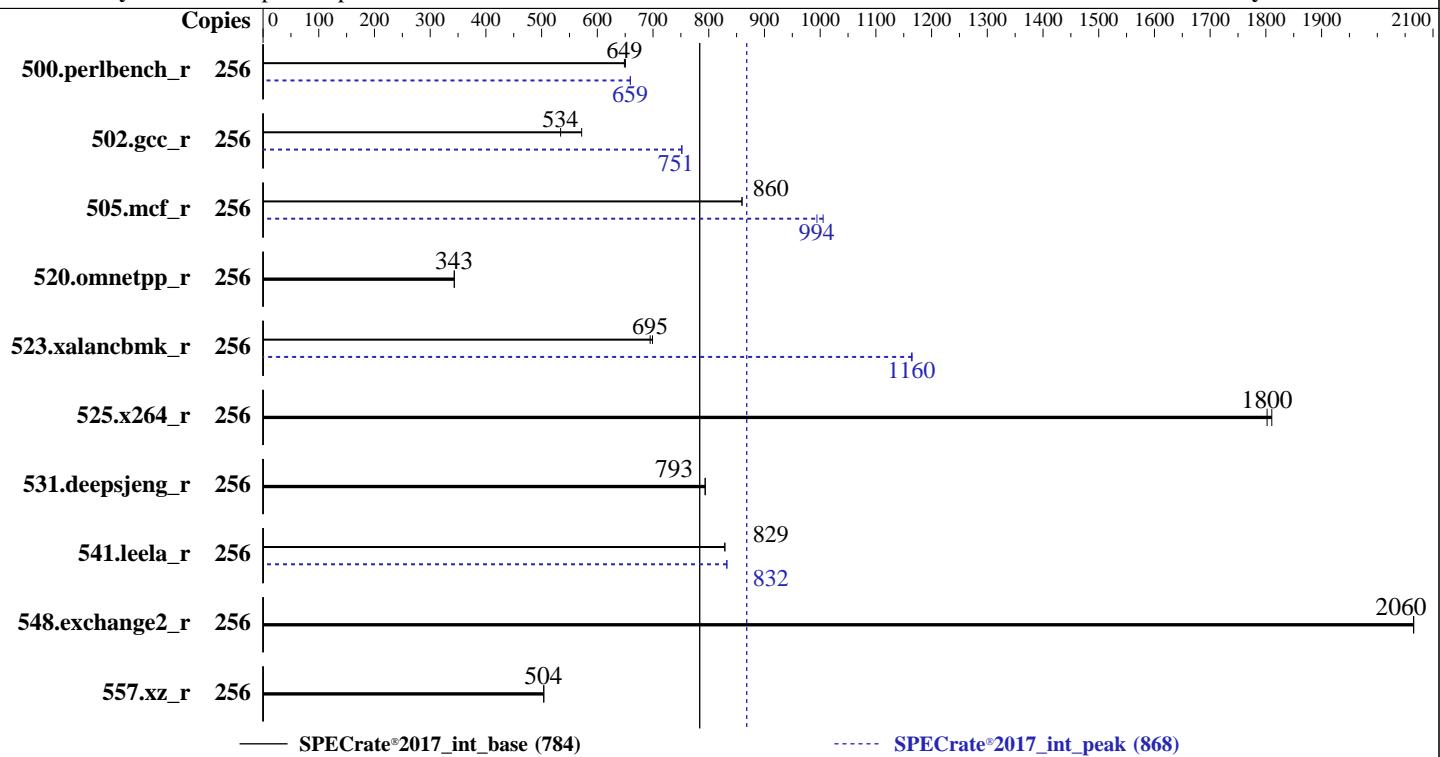

Hardware		Software	
CPU Name:	AMD EPYC 7763	OS:	Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86_64
Max MHz:	3500	Compiler:	C/C++/Fortran: Version 3.2.0 of AOCC
Nominal:	2450	Parallel:	No
Enabled:	128 cores, 2 chips, 2 threads/core	Firmware:	Version 7.00.04 released May-2022
Orderable:	1,2 chips	File System:	xfs
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	Run level 3 (multi-user)
L2:	512 KB I+D on chip per core	Base Pointers:	64-bit
L3:	256 MB I+D on chip per chip, 32 MB shared / 8 cores	Peak Pointers:	32/64-bit
Other:	None	Other:	jemalloc: jemalloc memory allocator library v5.1.0
Memory:	1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R)	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.
Storage:	1 x 480 GB SATA SSD		
Other:	None		



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

**SPECrate®2017\_int\_base = 784**

## Inspur NF5280A6 (AMD EPYC 7763)

**SPECrate®2017\_int\_peak = 868**

CPU2017 License: 3358

Test Date: Jul-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2022

Tested by: Inspur Corporation

Software Availability: Dec-2021

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	627	650	<b>628</b>	<b>649</b>			256	<b>618</b>	<b>659</b>	618	660				
502.gcc_r	256	634	572	<b>679</b>	<b>534</b>			256	482	752	<b>483</b>	<b>751</b>				
505.mcf_r	256	481	860	<b>481</b>	<b>860</b>			256	<b>416</b>	<b>994</b>	411	1010				
520.omnetpp_r	256	<b>979</b>	<b>343</b>	978	343			256	<b>979</b>	<b>343</b>	978	343				
523.xalancbmk_r	256	387	699	<b>389</b>	<b>695</b>			256	<b>232</b>	<b>1160</b>	232	1170				
525.x264_r	256	<b>249</b>	<b>1800</b>	248	1810			256	<b>249</b>	<b>1800</b>	248	1810				
531.deepsjeng_r	256	<b>370</b>	<b>793</b>	370	794			256	<b>370</b>	<b>793</b>	370	794				
541.leela_r	256	511	829	<b>512</b>	<b>829</b>			256	509	833	<b>509</b>	<b>832</b>				
548.exchange2_r	256	<b>325</b>	<b>2060</b>	325	2070			256	<b>325</b>	<b>2060</b>	325	2070				
557.xz_r	256	<b>549</b>	<b>504</b>	548	504			256	<b>549</b>	<b>504</b>	548	504				

**SPECrate®2017\_int\_base = 784**

**SPECrate®2017\_int\_peak = 868**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

### Inspur NF5280A6 (AMD EPYC 7763)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_int\_base = 784

SPECrate®2017\_int\_peak = 868

Test Date: Jul-2022

Hardware Availability: Aug-2022

Software Availability: Dec-2021

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.

To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/CPU2017/amd_rate_aocc320_milanx_A_lib/lib:/home/CPU2017/amd_rate_
    aocc320_milanx_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

```
MALLOC_CONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS and OS configuration:

SVM Mode = disable

DRAM Scrub time = disable

NUMA nodes per socket = NPS4

APBDIS = 1

Scaling\_Governor set to Performance

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 784

Inspur NF5280A6 (AMD EPYC 7763)

SPECrate®2017\_int\_peak = 868

CPU2017 License: 3358

Test Date: Jul-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2022

Tested by: Inspur Corporation

Software Availability: Dec-2021

## Platform Notes (Continued)

```
Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on localhost.localdomain Fri Jul 15 08:29:08 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7763 64-Core Processor
  2 "physical id"s (chips)
  256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 64
  siblings : 128
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
```

From lscpu from util-linux 2.32.1:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:  0-255
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):             2
NUMA node(s):          16
Vendor ID:             AuthenticAMD
CPU family:            25
Model:                 1
Model name:            AMD EPYC 7763 64-Core Processor
Stepping:               1
CPU MHz:                2132.673
CPU max MHz:            2450.0000
CPU min MHz:            1500.0000
BogoMIPS:                4891.08
Virtualization:         AMD-V
L1d cache:               32K
L1i cache:               32K
L2 cache:                512K
L3 cache:                32768K
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

### Inspur NF5280A6 (AMD EPYC 7763)

SPECrate®2017\_int\_base = 784

SPECrate®2017\_int\_peak = 868

CPU2017 License: 3358

Test Date: Jul-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2022

Tested by: Inspur Corporation

Software Availability: Dec-2021

## Platform Notes (Continued)

NUMA node0 CPU(s): 0-7,128-135  
NUMA node1 CPU(s): 8-15,136-143  
NUMA node2 CPU(s): 16-23,144-151  
NUMA node3 CPU(s): 24-31,152-159  
NUMA node4 CPU(s): 32-39,160-167  
NUMA node5 CPU(s): 40-47,168-175  
NUMA node6 CPU(s): 48-55,176-183  
NUMA node7 CPU(s): 56-63,184-191  
NUMA node8 CPU(s): 64-71,192-199  
NUMA node9 CPU(s): 72-79,200-207  
NUMA node10 CPU(s): 80-87,208-215  
NUMA node11 CPU(s): 88-95,216-223  
NUMA node12 CPU(s): 96-103,224-231  
NUMA node13 CPU(s): 104-111,232-239  
NUMA node14 CPU(s): 112-119,240-247  
NUMA node15 CPU(s): 120-127,248-255  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm constant\_tsc rep\_good nopl nonstop\_tsc cpuid extd\_apicid aperfmpf perf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4\_1 sse4\_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_llc mwaitx cpb cat\_13 cdp\_13 invpcid\_single hw\_pstate sme ssbd mba dev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqmq rdt\_a rdseed adx smap clflushopt clwb sha\_ni xsaveopt xsavec xgetbv1 xsaves cqmq\_llc cqmq\_occu\_llc cqmq\_mbm\_total cqmq\_mbm\_local clzero irperf xsaveerptr wbnoinvd amd\_ppin arat npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold v\_vmsave\_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow\_recov succor smca

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)  
node 0 cpus: 0 1 2 3 4 5 6 7 128 129 130 131 132 133 134 135  
node 0 size: 64251 MB  
node 0 free: 64027 MB  
node 1 cpus: 8 9 10 11 12 13 14 15 136 137 138 139 140 141 142 143  
node 1 size: 64422 MB  
node 1 free: 64180 MB  
node 2 cpus: 16 17 18 19 20 21 22 23 144 145 146 147 148 149 150 151  
node 2 size: 64470 MB  
node 2 free: 64296 MB  
node 3 cpus: 24 25 26 27 28 29 30 31 152 153 154 155 156 157 158 159  
node 3 size: 64442 MB  
node 3 free: 64269 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 784

Inspur NF5280A6 (AMD EPYC 7763)

SPECrate®2017\_int\_peak = 868

CPU2017 License: 3358

Test Date: Jul-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2022

Tested by: Inspur Corporation

Software Availability: Dec-2021

## Platform Notes (Continued)

```
node 4 cpus: 32 33 34 35 36 37 38 39 160 161 162 163 164 165 166 167
node 4 size: 64440 MB
node 4 free: 64239 MB
node 5 cpus: 40 41 42 43 44 45 46 47 168 169 170 171 172 173 174 175
node 5 size: 64444 MB
node 5 free: 64263 MB
node 6 cpus: 48 49 50 51 52 53 54 55 176 177 178 179 180 181 182 183
node 6 size: 64450 MB
node 6 free: 64279 MB
node 7 cpus: 56 57 58 59 60 61 62 63 184 185 186 187 188 189 190 191
node 7 size: 64452 MB
node 7 free: 64267 MB
node 8 cpus: 64 65 66 67 68 69 70 71 192 193 194 195 196 197 198 199
node 8 size: 64440 MB
node 8 free: 64299 MB
node 9 cpus: 72 73 74 75 76 77 78 79 200 201 202 203 204 205 206 207
node 9 size: 64456 MB
node 9 free: 64294 MB
node 10 cpus: 80 81 82 83 84 85 86 87 208 209 210 211 212 213 214 215
node 10 size: 64452 MB
node 10 free: 64296 MB
node 11 cpus: 88 89 90 91 92 93 94 95 216 217 218 219 220 221 222 223
node 11 size: 64476 MB
node 11 free: 64295 MB
node 12 cpus: 96 97 98 99 100 101 102 103 224 225 226 227 228 229 230 231
node 12 size: 64472 MB
node 12 free: 64299 MB
node 13 cpus: 104 105 106 107 108 109 110 111 232 233 234 235 236 237 238 239
node 13 size: 64462 MB
node 13 free: 64293 MB
node 14 cpus: 112 113 114 115 116 117 118 119 240 241 242 243 244 245 246 247
node 14 size: 64476 MB
node 14 free: 64291 MB
node 15 cpus: 120 121 122 123 124 125 126 127 248 249 250 251 252 253 254 255
node 15 size: 64468 MB
node 15 free: 64290 MB
node distances:
node   0    1    2    3    4    5    6    7    8    9   10   11   12   13   14   15
  0: 10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
  1: 11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
  2: 12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
  3: 12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
  4: 12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
  5: 12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32
  6: 12 12 12 12 12 12 10 11 32 32 32 32 32 32 32 32
  7: 12 12 12 12 12 12 11 10 32 32 32 32 32 32 32 32
  8: 32 32 32 32 32 32 32 32 10 11 12 12 12 12 12 12
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

### Inspur NF5280A6 (AMD EPYC 7763)

SPECrate®2017\_int\_base = 784

SPECrate®2017\_int\_peak = 868

CPU2017 License: 3358

Test Date: Jul-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2022

Tested by: Inspur Corporation

Software Availability: Dec-2021

## Platform Notes (Continued)

9:	32	32	32	32	32	32	32	32	11	10	12	12	12	12	12	12	12
10:	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12	12	12
11:	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12	12
12:	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12	12	12
13:	32	32	32	32	32	32	32	32	12	12	12	11	10	12	12	12	12
14:	32	32	32	32	32	32	32	32	12	12	12	12	12	10	11	11	10
15:	32	32	32	32	32	32	32	32	12	12	12	12	12	11	10	10	10

From /proc/meminfo

```
MemTotal:      1056641324 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/sbin/tuned-adm active

```
Current active profile: throughput-performance
```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 784

Inspur NF5280A6 (AMD EPYC 7763)

SPECrate®2017\_int\_peak = 868

CPU2017 License: 3358

Test Date: Jul-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2022

Tested by: Inspur Corporation

Software Availability: Dec-2021

## Platform Notes (Continued)

barriers and \_\_user pointer  
sanitization

Mitigation: Full AMD retrpoline,  
IBPB: conditional, IBRS\_FW, STIBP:  
always-on, RSB filling

CVE-2017-5715 (Spectre variant 2):

Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

run-level 3 Jul 15 06:39

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	372G	8.7G	363G	3%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Inspur
Product:	NF5280A6
Product Family:	Not specified
Serial:	200857231

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Samsung M393A4K40EB3-CWE 32 GB 2 rank 3200

BIOS:

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	7.00.04
BIOS Date:	05/19/2022

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 784

Inspur NF5280A6 (AMD EPYC 7763)

SPECrate®2017\_int\_peak = 868

CPU2017 License: 3358

Test Date: Jul-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2022

Tested by: Inspur Corporation

Software Availability: Dec-2021

## Compiler Version Notes (Continued)

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C | 502.gcc\_r(peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C++ | 523.xalancbmk\_r(peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 784

Inspur NF5280A6 (AMD EPYC 7763)

SPECrate®2017\_int\_peak = 868

CPU2017 License: 3358

Test Date: Jul-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2022

Tested by: Inspur Corporation

Software Availability: Dec-2021

## Compiler Version Notes (Continued)

LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C++ | 523.xalancbmk\_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

Fortran | 548.exchange2\_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 784

Inspur NF5280A6 (AMD EPYC 7763)

SPECrate®2017\_int\_peak = 868

CPU2017 License: 3358

Test Date: Jul-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2022

Tested by: Inspur Corporation

Software Availability: Dec-2021

## Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp  
-flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM  
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays  
-mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang

C++ benchmarks:

-m64 -std=c++98 -flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM  
-ffast-math -mllvm -enable-partial-unswitch  
-mllvm -unroll-threshold=100 -finline-aggressive  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECCrate®2017\_int\_base = 784

Inspur NF5280A6 (AMD EPYC 7763)

SPECCrate®2017\_int\_peak = 868

CPU2017 License: 3358

Test Date: Jul-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2022

Tested by: Inspur Corporation

Software Availability: Dec-2021

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false  
-mllvm -enable-loop-fusion -z muldefs -fvirtual-function-elimination  
-fvisibility=hidden -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4  
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split  
-flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM  
-ffast-math -z muldefs -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 784

Inspur NF5280A6 (AMD EPYC 7763)

SPECrate®2017\_int\_peak = 868

CPU2017 License: 3358

Test Date: Jul-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2022

Tested by: Inspur Corporation

Software Availability: Dec-2021

## Peak Portability Flags (Continued)

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -m64 -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver3  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

502.gcc\_r: -m32 -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -fgnu89-inline  
-ljemalloc

505.mcf\_r: -m64 -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 784

Inspur NF5280A6 (AMD EPYC 7763)

SPECrate®2017\_int\_peak = 868

CPU2017 License: 3358

Test Date: Jul-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2022

Tested by: Inspur Corporation

Software Availability: Dec-2021

## Peak Optimization Flags (Continued)

505.mcf\_r (continued):

```
-march=znver3 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -flv-function-specialization  
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

```
523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math  
-finline-aggressive -mllvm -unroll-threshold=100  
-flv-function-specialization -mllvm -enable-licm-vrp  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-ljemalloc
```

531.deepsjeng\_r: basepeak = yes

```
541.leela_r: -m64 -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math  
-finline-aggressive -mllvm -unroll-threshold=100  
-flv-function-specialization -mllvm -enable-licm-vrp  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdlibm -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 784

Inspur NF5280A6 (AMD EPYC 7763)

SPECrate®2017\_int\_peak = 868

CPU2017 License: 3358

Test Date: Jul-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2022

Tested by: Inspur Corporation

Software Availability: Dec-2021

## Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib -Wno-unused-command-line-argument  
-L/sppo/bin/cpu2017v118-aocc3-milanX/amd\_rate\_aocc320\_milanx\_A\_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk\_r: -L/usr/lib -Wno-unused-command-line-argument  
-L/sppo/bin/cpu2017v118-aocc3-milanX/amd\_rate\_aocc320\_milanx\_A\_lib/lib32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>  
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>  
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V1.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-07-15 08:29:07-0400.

Report generated on 2022-08-03 10:47:12 by CPU2017 PDF formatter v6442.

Originally published on 2022-08-03.