



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro


A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

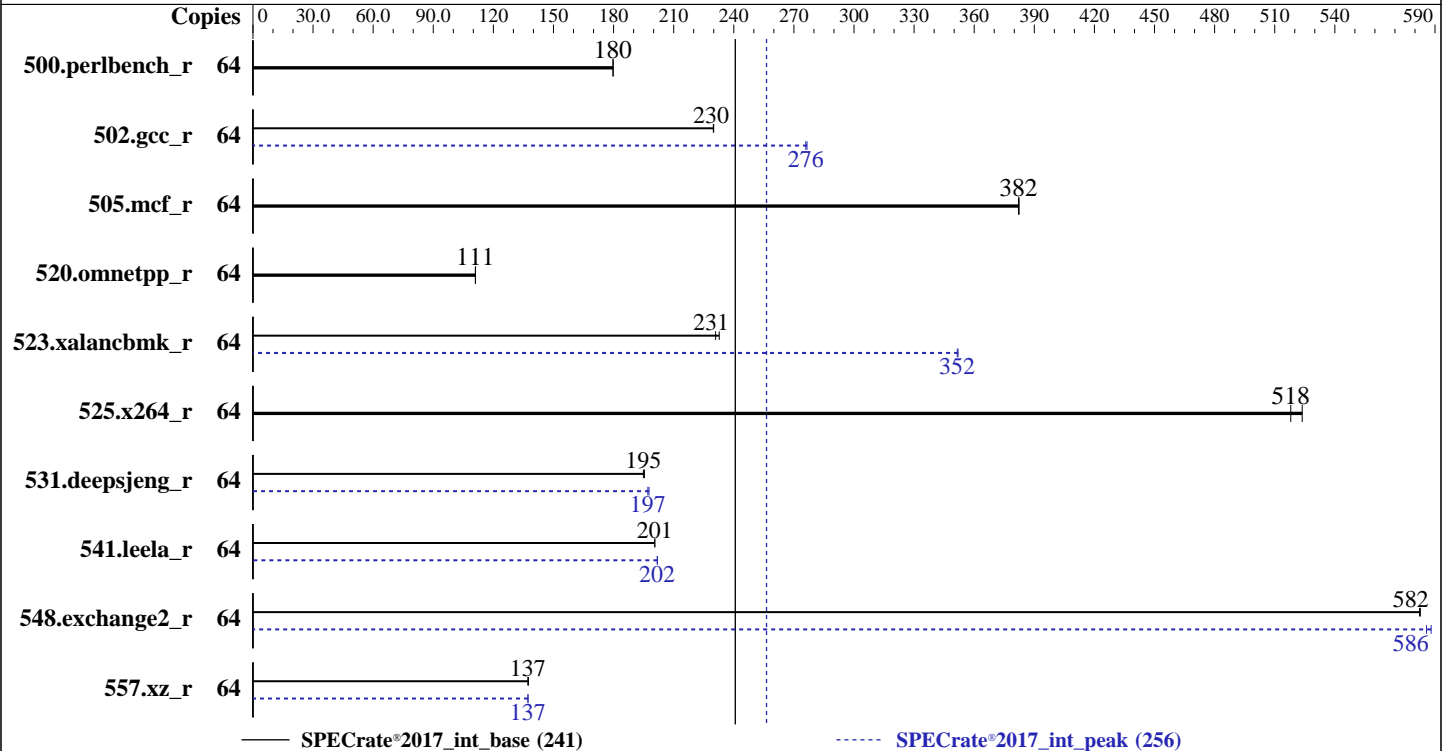

Hardware

CPU Name: AMD EPYC 7302
Max MHz: 3300
Nominal: 3000
Enabled: 32 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 128 MB I+D on chip per chip, 16 MB shared / 2 cores
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 200 GB SATA III SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP3
Kernel 5.3.18-57-default
Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
Parallel: No
Firmware: Version 2.4 released Apr-2022
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc: jemalloc memory allocator library v5.1.0
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	567	180	567	180			64	567	180	567	180		
502.gcc_r	64	394	230	394	230			64	328	276	328	277		
505.mcf_r	64	271	382	270	382			64	271	382	270	382		
520.omnetpp_r	64	756	111	756	111			64	756	111	756	111		
523.xalancbmk_r	64	290	233	293	231			64	192	352	192	352		
525.x264_r	64	216	518	214	524			64	216	518	214	524		
531.deepsjeng_r	64	376	195	375	195			64	371	198	372	197		
541.leela_r	64	528	201	528	201			64	525	202	525	202		
548.exchange2_r	64	288	583	288	582			64	286	586	285	588		
557.xz_r	64	503	138	504	137			64	504	137	503	137		

SPECrate®2017_int_base = **241**

SPECrate®2017_int_peak = **256**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017/amd_rate_aocc320_milanx_A_lib/lib;/home/cpu2017/amd_rate_aocc320_milanx_A_lib/lib32:"
MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:
MALLOC_CONF = "thp:never"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Settings:
Determinism Control = Manual
Determinism Slider = Power
cTDP Control = Manual
cTDP = 180
Package Power Limit Control = Manual
Package Power Limit = 180

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

Platform Notes (Continued)

APBDIS = 1
NUMA Nodes Per Socket = NPS4

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on 135-172-129 Thu Aug 4 23:37:13 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7302 16-Core Processor
2 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

From lscpu from util-linux 2.36.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 43 bits physical, 48 bits virtual
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
NUMA node(s): 16
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7302 16-Core Processor
Stepping: 0
Frequency boost: enabled
CPU MHz: 1824.598
CPU max MHz: 3000.0000
CPU min MHz: 1500.0000
BogoMIPS: 5999.93
Virtualization: AMD-V
L1d cache: 1 MiB
L1i cache: 1 MiB
L2 cache: 16 MiB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

Platform Notes (Continued)

```

L3 cache:                256 MiB
NUMA node0 CPU(s):      0,1,32,33
NUMA node1 CPU(s):      2,3,34,35
NUMA node2 CPU(s):      4,5,36,37
NUMA node3 CPU(s):      6,7,38,39
NUMA node4 CPU(s):      8,9,40,41
NUMA node5 CPU(s):      10,11,42,43
NUMA node6 CPU(s):      12,13,44,45
NUMA node7 CPU(s):      14,15,46,47
NUMA node8 CPU(s):      16,17,48,49
NUMA node9 CPU(s):      18,19,50,51
NUMA node10 CPU(s):     20,21,52,53
NUMA node11 CPU(s):     22,23,54,55
NUMA node12 CPU(s):     24,25,56,57
NUMA node13 CPU(s):     26,27,58,59
NUMA node14 CPU(s):     28,29,60,61
NUMA node15 CPU(s):     30,31,62,63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP conditional, RSB filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall sev_es fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	512K	16M	8	Unified	2	1024	1	64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

Platform Notes (Continued)

L3 16M 256M 16 Unified 3 16384 1 64

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```
From numactl --hardware
```

```
WARNING: a numactl 'node' might or might not correspond to a physical chip.
```

```
available: 16 nodes (0-15)
node 0 cpus: 0 1 32 33
node 0 size: 64319 MB
node 0 free: 64151 MB
node 1 cpus: 2 3 34 35
node 1 size: 64475 MB
node 1 free: 64365 MB
node 2 cpus: 4 5 36 37
node 2 size: 64510 MB
node 2 free: 64419 MB
node 3 cpus: 6 7 38 39
node 3 size: 64509 MB
node 3 free: 64248 MB
node 4 cpus: 8 9 40 41
node 4 size: 64510 MB
node 4 free: 64427 MB
node 5 cpus: 10 11 42 43
node 5 size: 64509 MB
node 5 free: 64429 MB
node 6 cpus: 12 13 44 45
node 6 size: 64510 MB
node 6 free: 64438 MB
node 7 cpus: 14 15 46 47
node 7 size: 64497 MB
node 7 free: 64412 MB
node 8 cpus: 16 17 48 49
node 8 size: 64510 MB
node 8 free: 64415 MB
node 9 cpus: 18 19 50 51
node 9 size: 64509 MB
node 9 free: 64397 MB
node 10 cpus: 20 21 52 53
node 10 size: 64510 MB
node 10 free: 64402 MB
node 11 cpus: 22 23 54 55
node 11 size: 64509 MB
node 11 free: 64423 MB
node 12 cpus: 24 25 56 57
node 12 size: 64510 MB
node 12 free: 64411 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

Platform Notes (Continued)

```

node 13 cpus: 26 27 58 59
node 13 size: 64509 MB
node 13 free: 64429 MB
node 14 cpus: 28 29 60 61
node 14 size: 64510 MB
node 14 free: 64428 MB
node 15 cpus: 30 31 62 63
node 15 size: 64509 MB
node 15 free: 64414 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
1:  11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
2:  12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
3:  12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
4:  12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
5:  12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32
6:  12 12 12 12 12 12 10 11 32 32 32 32 32 32 32 32
7:  12 12 12 12 12 12 11 10 32 32 32 32 32 32 32 32
8:  32 32 32 32 32 32 32 32 10 11 12 12 12 12 12 12
9:  32 32 32 32 32 32 32 32 11 10 12 12 12 12 12 12
10: 32 32 32 32 32 32 32 32 12 12 10 11 12 12 12 12
11: 32 32 32 32 32 32 32 32 12 12 11 10 12 12 12 12
12: 32 32 32 32 32 32 32 32 12 12 12 12 10 11 12 12
13: 32 32 32 32 32 32 32 32 12 12 12 12 11 10 12 12
14: 32 32 32 32 32 32 32 32 12 12 12 12 12 12 10 11
15: 32 32 32 32 32 32 32 32 12 12 12 12 12 12 11 10

```

```

From /proc/meminfo
MemTotal:      1056691736 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP3"
VERSION_ID="15.3"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp3"

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

Platform Notes (Continued)

```

uname -a:
  Linux 135-172-129 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9)
  x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):           Not affected
CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:        Not affected
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
                                             Bypass disabled via prctl and
                                             seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: usercopy/swapgs
                                             barriers and __user pointer
                                             sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Full AMD retpoline,
                                             IBPB: conditional, IBRS_FW, STIBP:
                                             conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):  Not affected

run-level 3 Aug 4 23:35

SPEC is set to: /home/cpu2017
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda4       xfs   144G  3.7G  141G   3% /home

From /sys/devices/virtual/dmi/id
  Vendor:         Supermicro
  Product:        Super Server
  Serial:         0123456789

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
  16x SK Hynix HMAA8GR7AJR4N-XN 64 GB 2 rank 3200

BIOS:
  BIOS Vendor:    American Megatrends Inc.
  BIOS Version:   2.4
  BIOS Date:      04/19/2022
  BIOS Revision:  5.14

(End of data from sysinfo program)

```




SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

Compiler Version Notes

=====
C | 502.gcc_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C | 502.gcc_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 523.xalanbmk_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

Compiler Version Notes (Continued)

Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 523.xalancbmk_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
Fortran | 548.exchange2_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -std=c++98 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

```
502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc
```

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

```
557.xz_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

Peak Optimization Flags (Continued)

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-inline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

```
531.deepsjeng_r: -m64 -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-inline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-lamdlbm -ljemalloc
```

541.leela_r: Same as 531.deepsjeng_r

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlbm -ljemalloc -lflang
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7302)

SPECrate®2017_int_base = 241

SPECrate®2017_int_peak = 256

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Sep-2019
Software Availability: Dec-2021

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revF.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-08-04 11:37:12-0400.

Report generated on 2022-08-31 20:08:54 by CPU2017 PDF formatter v6442.

Originally published on 2022-08-30.