



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.40 GHz, Intel Xeon E-2334)

SPECrate®2017_int_base = 42.1

SPECrate®2017_int_peak = 43.5

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2022

Hardware Availability: Sep-2022

Software Availability: Nov-2021

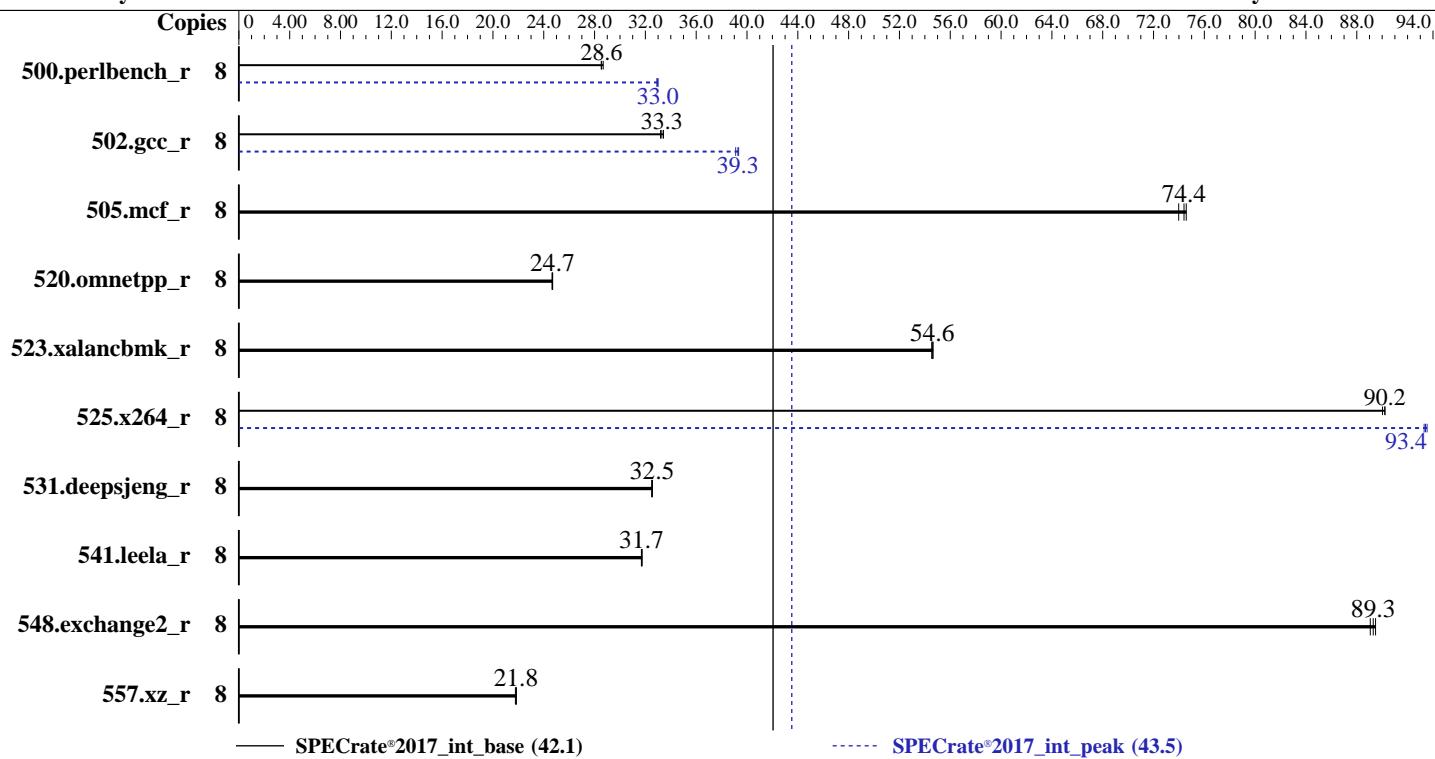

Hardware

CPU Name: Intel Xeon E-2334
Max MHz: 4800
Nominal: 3400
Enabled: 4 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 8 MB I+D on chip per chip
Other: None
Memory: 64 GB (2 x 32 GB 2Rx8 PC4-3200AA-E)
Storage: 2 x 400 GB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux release 8.5 (Ootpa)
Compiler: Kernel 4.18.0-348.el8.x86_64
C/C++: Version 2021.4.0 of Intel oneAPI
DPC++/C++: Compiler Build 20210924 for Linux;
Fortran: Version 2021.4.0 of Intel Fortran
Compiler: Compiler Build 20210910 for Linux;
Classic Build 20210910 for Linux;
C/C++: Version 2021.4.0 of Intel C/C++
Compiler: Classic Build 20210910 for Linux;
Parallel: No
Firmware: HPE BIOS Version U64 v1.60 (06/30/2022) released Jun-2022
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.40 GHz, Intel Xeon E-2334)

SPECrate®2017_int_base = 42.1

SPECrate®2017_int_peak = 43.5

CPU2017 License: 3

Test Date: Aug-2022

Test Sponsor: HPE

Hardware Availability: Sep-2022

Tested by: HPE

Software Availability: Nov-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	8	444	28.7	446	28.6	446	28.5	8	386	33.0	387	32.9	386	33.0
502.gcc_r	8	340	33.3	339	33.4	341	33.2	8	288	39.3	290	39.1	288	39.3
505.mcf_r	8	175	74.0	174	74.4	173	74.6	8	175	74.0	174	74.4	173	74.6
520.omnetpp_r	8	425	24.7	425	24.7	426	24.7	8	425	24.7	425	24.7	426	24.7
523.xalancbmk_r	8	155	54.7	155	54.5	155	54.6	8	155	54.7	155	54.5	155	54.6
525.x264_r	8	156	90.0	155	90.2	155	90.2	8	150	93.3	150	93.5	150	93.4
531.deepsjeng_r	8	282	32.6	282	32.5	282	32.5	8	282	32.6	282	32.5	282	32.5
541.leela_r	8	418	31.7	418	31.7	417	31.7	8	418	31.7	418	31.7	417	31.7
548.exchange2_r	8	234	89.5	235	89.1	235	89.3	8	234	89.5	235	89.1	235	89.3
557.xz_r	8	395	21.8	396	21.8	397	21.8	8	395	21.8	396	21.8	397	21.8

SPECrate®2017_int_base = 42.1

SPECrate®2017_int_peak = 43.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017_newbinaries/lib/intel64:/home/cpu2017_newbinaries/lib/ia3
    2:/home/cpu2017_newbinaries/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.40 GHz, Intel Xeon E-2334)

SPECrate®2017_int_base = 42.1

SPECrate®2017_int_peak = 43.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2022

Hardware Availability: Sep-2022

Software Availability: Nov-2021

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute

Thermal Configuration set to Maximum Cooling

Enhanced Processor Performance set to Enabled

Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017_newbinaries/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on localhost.localdomain Mon Aug 22 14:17:17 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) E-2334 CPU @ 3.40GHz
1 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 8
physical 0: cores 0 1 2 3

From lscpu from util-linux 2.32.1:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 8
On-line CPU(s) list: 0-7
Thread(s) per core: 2
Core(s) per socket: 4
Socket(s): 1
NUMA node(s): 1

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.40 GHz, Intel Xeon E-2334)

SPECrate®2017_int_base = 42.1

SPECrate®2017_int_peak = 43.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2022

Hardware Availability: Sep-2022

Software Availability: Nov-2021

Platform Notes (Continued)

Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
CPU family: 6
Model: 167
Model name: Intel(R) Xeon(R) E-2334 CPU @ 3.40GHz
BIOS Model name: Intel(R) Xeon(R) E-2334 CPU @ 3.40GHz
Stepping: 1
CPU MHz: 3400.000
BogoMIPS: 6816.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 512K
L3 cache: 8192K
NUMA node0 CPU(s): 0-7
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust sgx bmi1 avx2 smep bmi2 erms invpcid mpx avx512f avx512dq rdseed adx smap avx512ifma clflushopt intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid sgx_lc fsrm md_clear flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 8192 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 64324 MB
node 0 free: 63595 MB
node distances:
node 0
0: 10

From /proc/meminfo
MemTotal: 65868480 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/sbin/tuned-adm active

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.40 GHz, Intel Xeon E-2334)

SPECrate®2017_int_base = 42.1

SPECrate®2017_int_peak = 43.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2022

Hardware Availability: Sep-2022

Software Availability: Nov-2021

Platform Notes (Continued)

Current active profile: throughput-performance

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.5 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.5"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.5 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos

uname -a:
Linux localhost.localdomain 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Aug 22 14:14

```
SPEC is set to: /home/cpu2017_newbinaries
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   270G   74G  197G  28% /home
```

```
From /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant MicroServer Gen10 Plus v2
Product Family:  ProLiant
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.40 GHz, Intel Xeon E-2334)

SPECrate®2017_int_base = 42.1

SPECrate®2017_int_peak = 43.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2022

Hardware Availability: Sep-2022

Software Availability: Nov-2021

Platform Notes (Continued)

Serial: MSG10PV2001

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Micron 18ASF4G72AZ-3G2B1 32 GB 2 rank 3200

BIOS:

BIOS Vendor:	HPE
BIOS Version:	U64
BIOS Date:	06/30/2022
BIOS Revision:	1.60
Firmware Revision:	2.70

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 500.perlbench_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.40 GHz, Intel Xeon E-2334)

SPECrate®2017_int_base = 42.1

SPECrate®2017_int_peak = 43.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2022

Hardware Availability: Sep-2022

Software Availability: Nov-2021

Compiler Version Notes (Continued)

C | 500.perlbench_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 500.perlbench_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.40 GHz, Intel Xeon E-2334)

SPECrate®2017_int_base = 42.1

SPECrate®2017_int_peak = 43.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2022

Hardware Availability: Sep-2022

Software Availability: Nov-2021

Compiler Version Notes (Continued)

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.4.0 Build 20210910_000000

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.40 GHz, Intel Xeon E-2334)

SPECrate®2017_int_base = 42.1

SPECrate®2017_int_peak = 43.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2022

Hardware Availability: Sep-2022

Software Availability: Nov-2021

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.40 GHz, Intel Xeon E-2334)

SPECrate®2017_int_base = 42.1

SPECrate®2017_int_peak = 43.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2022

Hardware Availability: Sep-2022

Software Availability: Nov-2021

Peak Portability Flags (Continued)

525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.propdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

MicroServer Gen10 Plus v2
(3.40 GHz, Intel Xeon E-2334)

SPECrate®2017_int_base = 42.1

SPECrate®2017_int_peak = 43.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2022

Hardware Availability: Sep-2022

Software Availability: Nov-2021

Peak Optimization Flags (Continued)

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revF.html>

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revF.xml>

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-08-22 14:17:16-0400.

Report generated on 2022-09-13 16:57:20 by CPU2017 PDF formatter v6442.

Originally published on 2022-09-13.