



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2022

Hardware Availability: Aug-2022

Software Availability: Dec-2021

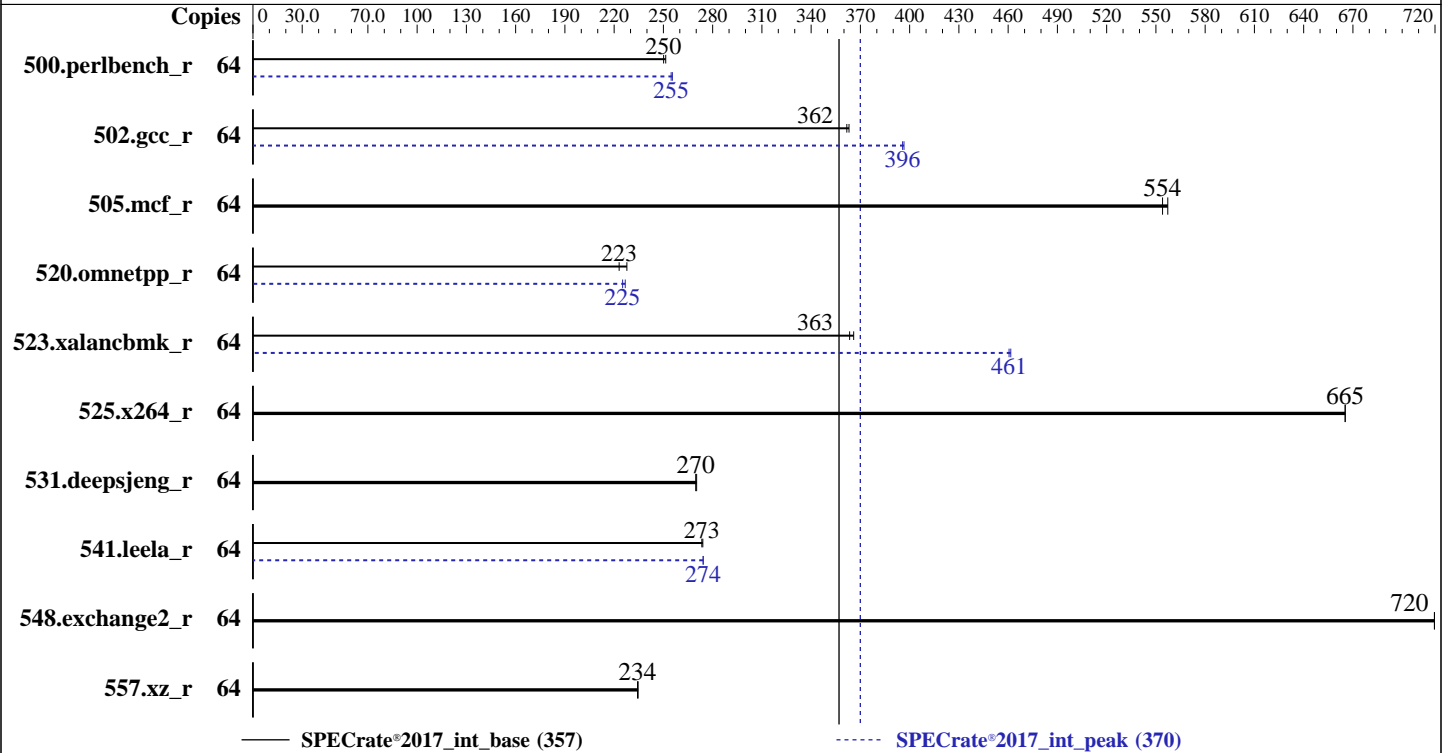

Hardware

CPU Name: AMD EPYC 7373X
 Max MHz: 3800
 Nominal: 3050
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 768 MB I+D on chip per chip, 96 MB shared / 2 cores
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86_64
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
 Parallel: No
 Firmware: Version 7.00.04 released May-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Sep-2022
Hardware Availability: Aug-2022
Software Availability: Dec-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	405	251	407	250			64	399	255	400	255		
502.gcc_r	64	250	363	251	362			64	229	396	229	397		
505.mcf_r	64	187	554	186	557			64	187	554	186	557		
520.omnetpp_r	64	369	228	376	223			64	373	225	370	227		
523.xalancbmk_r	64	186	363	185	366			64	146	462	147	461		
525.x264_r	64	168	665	168	665			64	168	665	168	665		
531.deepsjeng_r	64	272	270	271	270			64	272	270	271	270		
541.leela_r	64	387	274	388	273			64	386	274	386	274		
548.exchange2_r	64	233	720	233	720			64	233	720	233	720		
557.xz_r	64	295	235	295	234			64	295	235	295	234		

SPECrate®2017_int_base = **357**

SPECrate®2017_int_peak = **370**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2022

Hardware Availability: Aug-2022

Software Availability: Dec-2021

Operating System Notes (Continued)

Scaling_Governor set to Performance

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/CPU2017/amd_rate_aocc320_milanx_A_lib/lib;/home/CPU2017/amd_rate_  
    aocc320_milanx_A_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS configuration:

SVM Mode set to disable

DRAM Scrub time set to disable

NUMA nodes per socket set to NPS4

APBDIS set to 1

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2022

Hardware Availability: Aug-2022

Software Availability: Dec-2021

Platform Notes (Continued)

sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Tue Sep 6 13:15:45 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7373X 16-Core Processor
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu from util-linux 2.32.1:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
NUMA node(s): 16
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7373X 16-Core Processor
Stepping: 2
CPU MHz: 2949.170
CPU max MHz: 3050.0000
CPU min MHz: 1500.0000
BogoMIPS: 6088.64
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 98304K
NUMA node0 CPU(s): 0,1,32,33
NUMA node1 CPU(s): 2,3,34,35
NUMA node2 CPU(s): 4,5,36,37
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Sep-2022
Hardware Availability: Aug-2022
Software Availability: Dec-2021

Platform Notes (Continued)

```

NUMA node3 CPU(s): 6,7,38,39
NUMA node4 CPU(s): 8,9,40,41
NUMA node5 CPU(s): 10,11,42,43
NUMA node6 CPU(s): 12,13,44,45
NUMA node7 CPU(s): 14,15,46,47
NUMA node8 CPU(s): 16,17,48,49
NUMA node9 CPU(s): 18,19,50,51
NUMA node10 CPU(s): 20,21,52,53
NUMA node11 CPU(s): 22,23,54,55
NUMA node12 CPU(s): 24,25,56,57
NUMA node13 CPU(s): 26,27,58,59
NUMA node14 CPU(s): 28,29,60,61
NUMA node15 CPU(s): 30,31,62,63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb
sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 16 nodes (0-15)
node 0 cpus: 0 1 32 33
node 0 size: 64318 MB
node 0 free: 64196 MB
node 1 cpus: 2 3 34 35
node 1 size: 64506 MB
node 1 free: 64413 MB
node 2 cpus: 4 5 36 37
node 2 size: 64502 MB
node 2 free: 64414 MB
node 3 cpus: 6 7 38 39
node 3 size: 64453 MB
node 3 free: 64386 MB
node 4 cpus: 8 9 40 41
node 4 size: 64500 MB
node 4 free: 64411 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2022

Hardware Availability: Aug-2022

Software Availability: Dec-2021

Platform Notes (Continued)

```

node 5 cpus: 10 11 42 43
node 5 size: 64504 MB
node 5 free: 64366 MB
node 6 cpus: 12 13 44 45
node 6 size: 64500 MB
node 6 free: 64416 MB
node 7 cpus: 14 15 46 47
node 7 size: 64480 MB
node 7 free: 64422 MB
node 8 cpus: 16 17 48 49
node 8 size: 64494 MB
node 8 free: 64431 MB
node 9 cpus: 18 19 50 51
node 9 size: 64492 MB
node 9 free: 64437 MB
node 10 cpus: 20 21 52 53
node 10 size: 64508 MB
node 10 free: 64438 MB
node 11 cpus: 22 23 54 55
node 11 size: 64498 MB
node 11 free: 64438 MB
node 12 cpus: 24 25 56 57
node 12 size: 64502 MB
node 12 free: 64439 MB
node 13 cpus: 26 27 58 59
node 13 size: 64492 MB
node 13 free: 64436 MB
node 14 cpus: 28 29 60 61
node 14 size: 64506 MB
node 14 free: 64441 MB
node 15 cpus: 30 31 62 63
node 15 size: 64461 MB
node 15 free: 64436 MB
node distances:

```

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	11	12	12	12	12	12	12	32	32	32	32	32	32	32	32
1:	11	10	12	12	12	12	12	12	32	32	32	32	32	32	32	32
2:	12	12	10	11	12	12	12	12	32	32	32	32	32	32	32	32
3:	12	12	11	10	12	12	12	12	32	32	32	32	32	32	32	32
4:	12	12	12	12	10	11	12	12	32	32	32	32	32	32	32	32
5:	12	12	12	12	11	10	12	12	32	32	32	32	32	32	32	32
6:	12	12	12	12	12	12	10	11	32	32	32	32	32	32	32	32
7:	12	12	12	12	12	12	11	10	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	32	10	11	12	12	12	12	12	12
9:	32	32	32	32	32	32	32	32	11	10	12	12	12	12	12	12
10:	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12	12
11:	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Sep-2022
Hardware Availability: Aug-2022
Software Availability: Dec-2021

Platform Notes (Continued)

12:	32	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12	12
13:	32	32	32	32	32	32	32	32	32	12	12	12	12	11	10	12	12
14:	32	32	32	32	32	32	32	32	32	12	12	12	12	12	12	10	11
15:	32	32	32	32	32	32	32	32	32	12	12	12	12	12	12	11	10

From /proc/meminfo

MemTotal: 1056684852 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/sbin/tuned-adm active
Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

```

os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.3 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.3"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

```

uname -a:

Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline,

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Sep-2022
Hardware Availability: Aug-2022
Software Availability: Dec-2021

Platform Notes (Continued)

IBPB: conditional, IBRS_FW, STIBP:
always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Sep 6 13:15

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	372G	8.7G	363G	3%	/home

From /sys/devices/virtual/dmi/id

Vendor: Inspur
 Product: NF5280A6
 Product Family: Not specified
 Serial: 200857231

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

BIOS:

BIOS Vendor: American Megatrends Inc.
 BIOS Version: 7.00.04
 BIOS Date: 05/19/2022

(End of data from sysinfo program)

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
 | 525.x264_r(base, peak) 557.xz_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Sep-2022
Hardware Availability: Aug-2022
Software Availability: Dec-2021

Compiler Version Notes (Continued)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C | 502.gcc_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 523.xalancbmk_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2022

Hardware Availability: Aug-2022

Software Availability: Dec-2021

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C++ | 523.xalanbmk_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C++ | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2022

Hardware Availability: Aug-2022

Software Availability: Dec-2021

Base Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang

```

C++ benchmarks:

```

-m64 -std=c++98 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -ljemalloc -lflang

```

Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-inline-recursion=4

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2022

Hardware Availability: Aug-2022

Software Availability: Dec-2021

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2022

Hardware Availability: Aug-2022

Software Availability: Dec-2021

Peak Portability Flags (Continued)

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

```
502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc
```

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

```
520.omnetpp_r: -m64 -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2022

Hardware Availability: Aug-2022

Software Availability: Dec-2021

Peak Optimization Flags (Continued)

520.omnetpp_r (continued):

```
-finline-aggressive -mllvm -unroll-threshold=100  
-flv-function-specialization -mllvm -enable-licm-vrp  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdlibm -ljemalloc
```

523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto

```
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math  
-finline-aggressive -mllvm -unroll-threshold=100  
-flv-function-specialization -mllvm -enable-licm-vrp  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-ljemalloc
```

531.deepsjeng_r: basepeak = yes

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument

```
-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument

```
-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 357

Inspur NF5280A6 (AMD EPYC 7373X)

SPECrate®2017_int_peak = 370

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2022

Hardware Availability: Aug-2022

Software Availability: Dec-2021

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V1.6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-09-06 13:15:44-0400.

Report generated on 2022-09-27 17:15:32 by CPU2017 PDF formatter v6442.

Originally published on 2022-09-27.