



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5180M6 (Intel Xeon Silver 4309Y)

SPECrate®2017_fp_base = 197

SPECrate®2017_fp_peak = 198

CPU2017 License: 3358


Test Date: Aug-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2021

Tested by: Inspur Corporation

Software Availability: May-2022

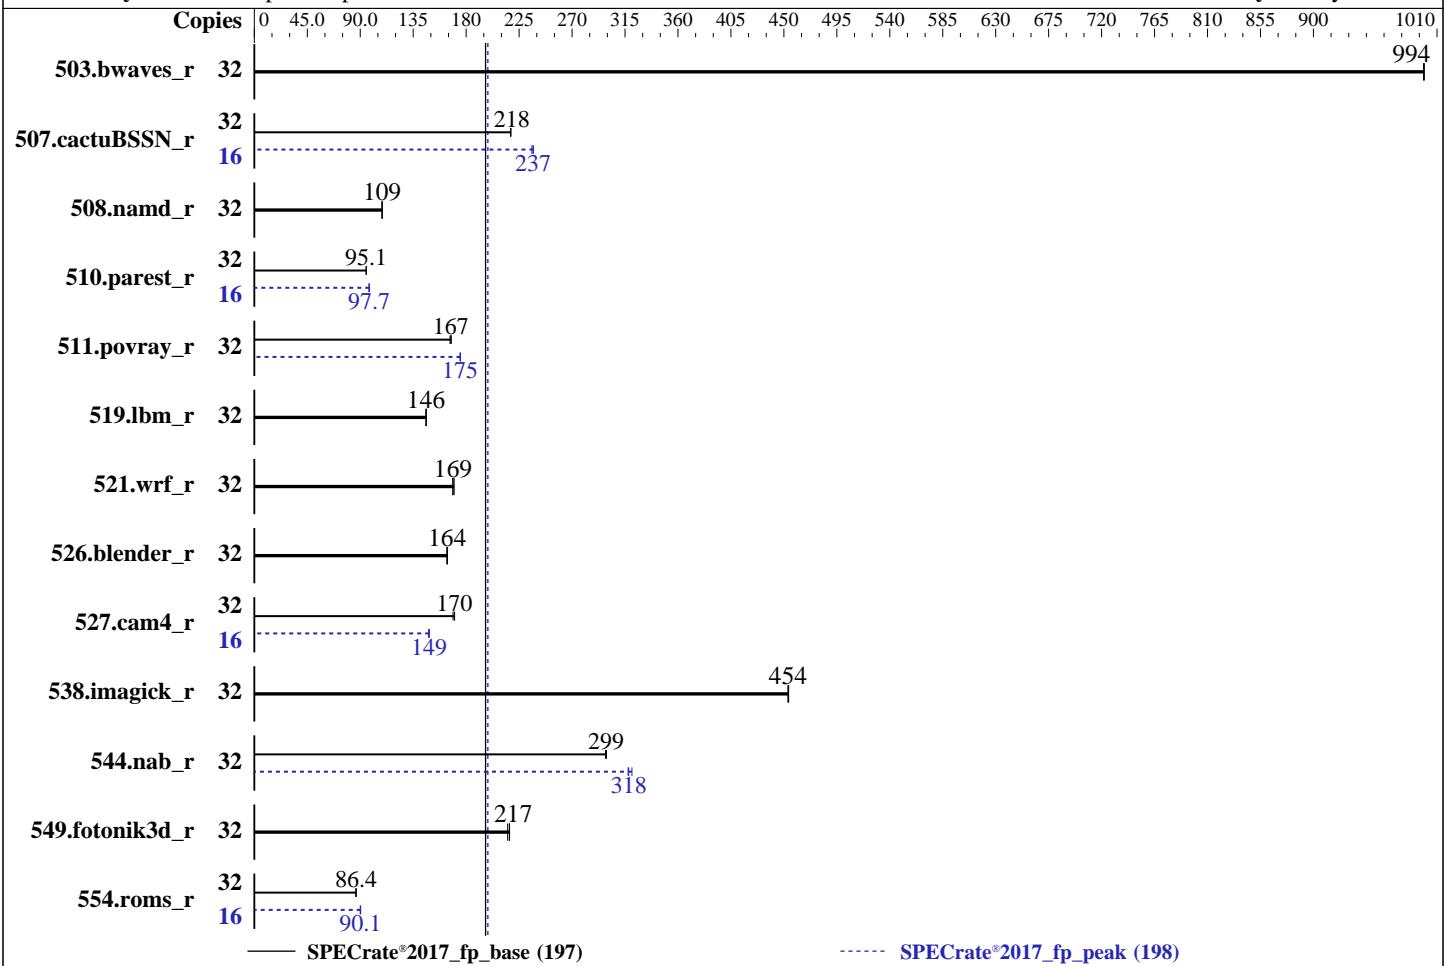

— SPECrate®2017_fp_base (197)
----- SPECrate®2017_fp_peak (198)

Hardware

CPU Name: Intel Xeon Silver 4309Y
 Max MHz: 3600
 Nominal: 2800
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 12 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R, running at 2666)
 Storage: 1 x 2 TB NVME SSD
 Other: None

OS:

Red Hat Enterprise Linux release 8.3 (Ootpa)
 4.18.0-240.el8.x86_64

Compiler:

C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler Build 20220316 for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler Build 20220316 for Linux;

Parallel:

No

Firmware:

Version 04.12.02 released Apr-2021

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management:

BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5180M6 (Intel Xeon Silver 4309Y)

SPECrate®2017_fp_base = 197

SPECrate®2017_fp_peak = 198

CPU2017 License: 3358

Test Date: Aug-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2021

Tested by: Inspur Corporation

Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	323	994	323	994	323	994	32	323	994	323	994	323	994
507.cactuBSSN_r	32	186	218	186	218	186	218	16	85.5	237	85.9	236	85.4	237
508.namd_r	32	280	109	280	109	280	109	32	280	109	280	109	280	109
510.parest_r	32	880	95.1	880	95.2	880	95.1	16	429	97.5	428	97.7	428	97.7
511.povray_r	32	447	167	447	167	449	166	32	426	175	427	175	427	175
519.lbm_r	32	231	146	231	146	231	146	32	231	146	231	146	231	146
521.wrf_r	32	424	169	425	169	422	170	32	424	169	425	169	422	170
526.blender_r	32	297	164	297	164	298	164	32	297	164	297	164	298	164
527.cam4_r	32	329	170	329	170	331	169	16	188	149	188	149	189	148
538.imagick_r	32	175	454	175	454	175	454	32	175	454	175	454	175	454
544.nab_r	32	180	299	180	299	180	299	32	169	318	170	318	168	321
549.fotonik3d_r	32	575	217	575	217	579	215	32	575	217	575	217	579	215
554.roms_r	32	588	86.5	588	86.4	589	86.4	16	281	90.4	282	90.1	282	90.1

SPECrate®2017_fp_base = 197

SPECrate®2017_fp_peak = 198

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Scaling_Governor set to Performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5180M6 (Intel Xeon Silver 4309Y)

SPECrate®2017_fp_base = 197

SPECrate®2017_fp_peak = 198

CPU2017 License: 3358

Test Date: Aug-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2021

Tested by: Inspur Corporation

Software Availability: May-2022

General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
<https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

ENERGY_PERF_BIAS_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

Sub NUMA Cluster (SNC) set to Enable

Sysinfo program /home/CPU2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Mon Aug 29 05:14:50 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz

2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

From lscpu from util-linux 2.32.1:

Architecture: x86_64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5180M6 (Intel Xeon Silver 4309Y)

SPECrate®2017_fp_base = 197

SPECrate®2017_fp_peak = 198

CPU2017 License: 3358

Test Date: Aug-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2021

Tested by: Inspur Corporation

Software Availability: May-2022

Platform Notes (Continued)

```

CPU op-mode(s):           32-bit, 64-bit
Byte Order:               Little Endian
CPU(s):                  32
On-line CPU(s) list:     0-31
Thread(s) per core:      2
Core(s) per socket:       8
Socket(s):                2
NUMA node(s):             2
Vendor ID:                GenuineIntel
CPU family:               6
Model:                   106
Model name:              Intel(R) Xeon(R) Silver 4309Y CPU @ 2.80GHz
Stepping:                 6
CPU MHz:                 3400.000
CPU max MHz:              3600.0000
CPU min MHz:              800.0000
BogoMIPS:                 5600.00
Virtualization:          VT-x
L1d cache:                48K
L1i cache:                32K
L2 cache:                 1280K
L3 cache:                 12288K
NUMA node0 CPU(s):        0-7,16-23
NUMA node1 CPU(s):        8-15,24-31
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                           pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                           lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
                           aperfmpfperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                           pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
                           rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single
                           intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2
                           smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                           clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavenc xgetbv1
                           xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect wbnoinvd
                           dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                           avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
                           arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 12288 KB
```

```
From numactl --hardware
```

```
WARNING: a numactl 'node' might or might not correspond to a physical chip.
```

```
available: 2 nodes (0-1)
```

```
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
```

```
node 0 size: 506237 MB
```

```
node 0 free: 505213 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5180M6 (Intel Xeon Silver 4309Y)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017_fp_base = 197

SPECrate®2017_fp_peak = 198

Test Date: Aug-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

```
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 506485 MB
node 1 free: 507902 MB
node distances:
node   0   1
 0: 10 20
 1: 20 10

From /proc/meminfo
  MemTotal:         1056500348 kB
  HugePages_Total:      0
  Hugepagesize:       2048 kB

/sbin/tuned-adm active
  Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.3 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.3"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:
  Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
  x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:          Not affected
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
                                              Bypass disabled via prctl and
                                              seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: usercopy/swaps
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5180M6 (Intel Xeon Silver 4309Y)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017_fp_base = 197

SPECrate®2017_fp_peak = 198

Test Date: Aug-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2):

barriers and __user pointer
sanitization

Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Aug 28 23:07

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.4T	101G	1.3T	8%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Inspur
Product:	NF5180M6
Product Family:	Family
Serial:	380827124

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Micron 18ASF4G72PDZ-3G2E1 32 GB 2 rank 3200, configured at 2666

BIOS:

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	04.12.02
BIOS Date:	04/02/2021
BIOS Revision:	5.21

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5180M6 (Intel Xeon Silver 4309Y)

SPECrate®2017_fp_base = 197

SPECrate®2017_fp_peak = 198

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Compiler Version Notes (Continued)

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 197

Inspur NF5180M6 (Intel Xeon Silver 4309Y)

SPECrate®2017_fp_peak = 198

CPU2017 License: 3358

Test Date: Aug-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2021

Tested by: Inspur Corporation

Software Availability: May-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5180M6 (Intel Xeon Silver 4309Y)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017_fp_base = 197

SPECrate®2017_fp_peak = 198

Test Date: Aug-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-futo -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -futo  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -futo  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-futo -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-futo -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-futo -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 197

Inspur NF5180M6 (Intel Xeon Silver 4309Y)

SPECrate®2017_fp_peak = 198

CPU2017 License: 3358

Test Date: Aug-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2021

Tested by: Inspur Corporation

Software Availability: May-2022

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5180M6 (Intel Xeon Silver 4309Y)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017_fp_base = 197

SPECrate®2017_fp_peak = 198

Test Date: Aug-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Peak Optimization Flags (Continued)

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
521.wrf_r: basepeak = yes
```

```
527.cam4_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

```
526.blender_r: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.5.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.5.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 197

Inspur NF5180M6 (Intel Xeon Silver 4309Y)

SPECrate®2017_fp_peak = 198

CPU2017 License: 3358

Test Date: Aug-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2021

Tested by: Inspur Corporation

Software Availability: May-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-08-29 05:14:49-0400.

Report generated on 2022-09-27 17:16:17 by CPU2017 PDF formatter v6442.

Originally published on 2022-09-27.