



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.40 GHz, Intel Xeon Silver 4314)

SPECrate®2017\_int\_base = 252

SPECrate®2017\_int\_peak = 258

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

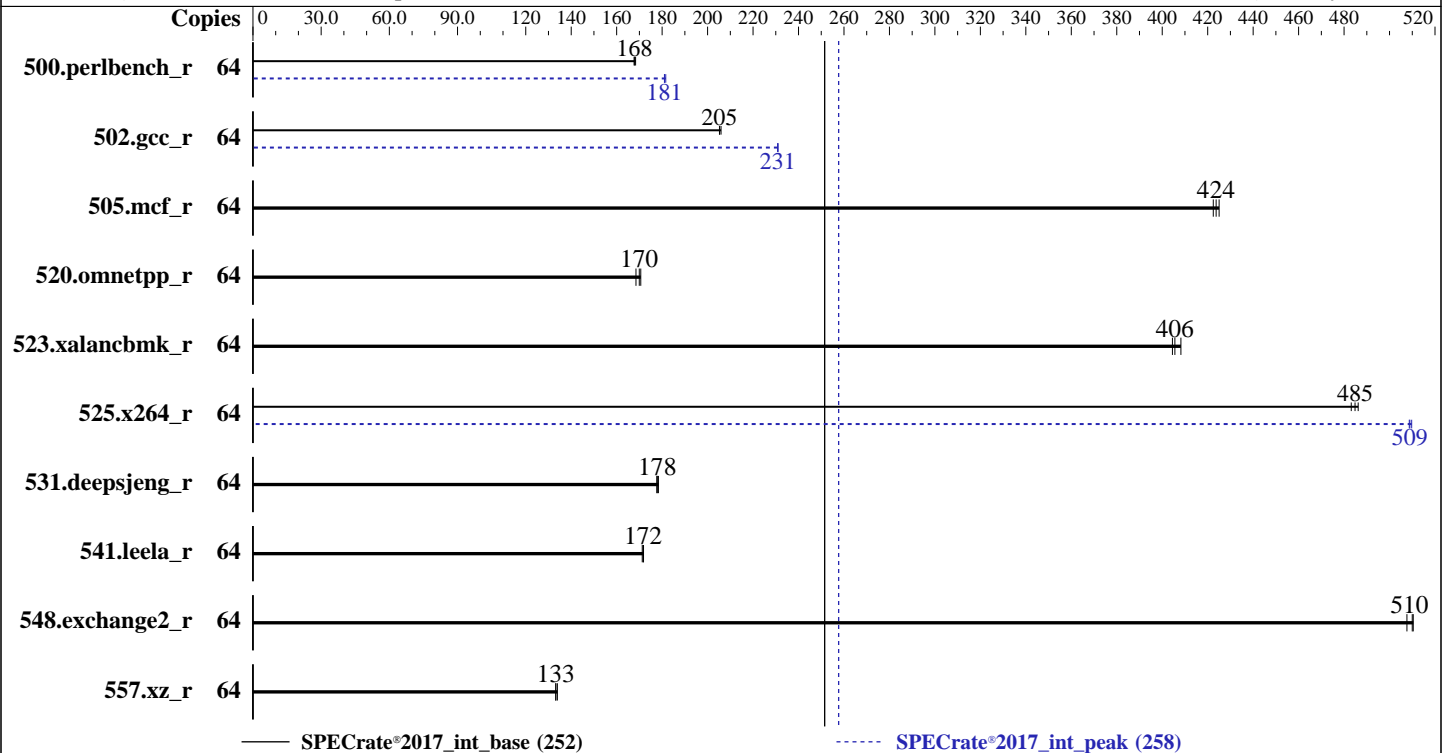

### Hardware

CPU Name: Intel Xeon Silver 4314  
 Max MHz: 3400  
 Nominal: 2400  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 24 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R, running at 2666)  
 Storage: 1 x 1 TB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.25.1.el8\_4.x86\_64  
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 0802 released Apr-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.40 GHz, Intel Xeon Silver 4314)

SPECrate®2017\_int\_base = 252

SPECrate®2017\_int\_peak = 258

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	608	168	605	168	<b>607</b>	<b>168</b>	64	<b>563</b>	<b>181</b>	563	181	561	182
502.gcc_r	64	440	206	<b>441</b>	<b>205</b>	442	205	64	<b>392</b>	<b>231</b>	392	231	393	231
505.mcf_r	64	245	422	243	425	<b>244</b>	<b>424</b>	64	245	422	243	425	<b>244</b>	<b>424</b>
520.omnetpp_r	64	<b>494</b>	<b>170</b>	492	171	498	168	64	<b>494</b>	<b>170</b>	492	171	498	168
523.xalancbmk_r	64	167	404	<b>167</b>	<b>406</b>	166	408	64	167	404	<b>167</b>	<b>406</b>	166	408
525.x264_r	64	<b>231</b>	<b>485</b>	230	486	232	483	64	220	509	<b>220</b>	<b>509</b>	220	510
531.deepsjeng_r	64	413	178	<b>412</b>	<b>178</b>	411	178	64	413	178	<b>412</b>	<b>178</b>	411	178
541.leela_r	64	617	172	619	171	<b>617</b>	<b>172</b>	64	617	172	619	171	<b>617</b>	<b>172</b>
548.exchange2_r	64	329	510	<b>329</b>	<b>510</b>	330	508	64	329	510	<b>329</b>	<b>510</b>	330	508
557.xz_r	64	<b>519</b>	<b>133</b>	516	134	519	133	64	<b>519</b>	<b>133</b>	516	134	519	133

SPECrate®2017\_int\_base = **252**

SPECrate®2017\_int\_peak = **258**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/ic22u1/lib/intel64:/home/ic22u1/lib/ia32:/home/ic22u1/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.40 GHz, Intel Xeon Silver 4314)

SPECrate®2017\_int\_base = 252

SPECrate®2017\_int\_peak = 258

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

### General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

SNC = Enable SNC2 (2-clusters)

Engine Boost = Aggressive

SR-IOV Support = Disabled

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /home/ic22ul/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Sat Oct 8 21:30:37 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4314 CPU @ 2.40GHz

2 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu from util-linux 2.32.1:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.40 GHz, Intel Xeon Silver 4314)

SPECrate®2017\_int\_base = 252

SPECrate®2017\_int\_peak = 258

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

### Platform Notes (Continued)

```

Byte Order:           Little Endian
CPU(s):               64
On-line CPU(s) list: 0-63
Thread(s) per core:  2
Core(s) per socket:  16
Socket(s):            2
NUMA node(s):        4
Vendor ID:            GenuineIntel
BIOS Vendor ID:      Intel
CPU family:           6
Model:                106
Model name:           Intel(R) Xeon(R) Silver 4314 CPU @ 2.40GHz
BIOS Model name:     Intel(R) Xeon(R) Silver 4314 CPU @ 2.40GHz
Stepping:             6
CPU MHz:              1664.355
CPU max MHz:          3400.0000
CPU min MHz:          800.0000
BogoMIPS:             4800.00
Virtualization:      VT-x
L1d cache:            48K
L1i cache:            32K
L2 cache:             1280K
L3 cache:             24576K
NUMA node0 CPU(s):   0-7,32-39
NUMA node1 CPU(s):   8-15,40-47
NUMA node2 CPU(s):   16-23,48-55
NUMA node3 CPU(s):   24-31,56-63
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts hwp hwp_act_window
hwp_epp hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig
flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 24576 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.40 GHz, Intel Xeon Silver 4314)

SPECrate®2017\_int\_base = 252

SPECrate®2017\_int\_peak = 258

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

### Platform Notes (Continued)

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 32 33 34 35 36 37 38 39
node 0 size: 257620 MB
node 0 free: 256229 MB
node 1 cpus: 8 9 10 11 12 13 14 15 40 41 42 43 44 45 46 47
node 1 size: 258007 MB
node 1 free: 257230 MB
node 2 cpus: 16 17 18 19 20 21 22 23 48 49 50 51 52 53 54 55
node 2 size: 258044 MB
node 2 free: 256943 MB
node 3 cpus: 24 25 26 27 28 29 30 31 56 57 58 59 60 61 62 63
node 3 size: 258041 MB
node 3 free: 257170 MB
node distances:
node  0  1  2  3
  0:  10  11  20  20
  1:  11  10  20  20
  2:  20  20  10  11
  3:  20  20  11  10

```

From /proc/meminfo

```

MemTotal:      1056474796 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sbin/tuned-adm active

Current active profile: throughput-performance

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.4 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.4"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga

```

uname -a:

Linux localhost.localdomain 4.18.0-305.25.1.el8\_4.x86\_64 #1 SMP Mon Oct 18 14:34:11

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.40 GHz, Intel Xeon Silver 4314)

SPECrate®2017\_int\_base = 252

SPECrate®2017\_int\_peak = 258

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

### Platform Notes (Continued)

EDT 2021 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Oct 7 12:57

SPEC is set to: /home/ic22u1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	878G	119G	760G	14%	/home

```

From /sys/devices/virtual/dmi/id
Vendor:          ASUSTeK COMPUTER INC.
Product:         RS720-E10-RS12
Product Family: Server
Serial:          012345678901

```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200, configured at 2666

BIOS:

```

BIOS Vendor:     American Megatrends Inc.
BIOS Version:    0802
BIOS Date:       04/29/2022
BIOS Revision:   8.2

```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.40 GHz, Intel Xeon Silver 4314)

SPECrate®2017\_int\_base = 252

SPECrate®2017\_int\_peak = 258

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E10(Z12PP-D32) Server System  
(2.40 GHz, Intel Xeon Silver 4314)

SPECrate®2017\_int\_base = 252

SPECrate®2017\_int\_peak = 258

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

## Compiler Version Notes (Continued)

2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E10(Z12PP-D32) Server System  
(2.40 GHz, Intel Xeon Silver 4314)

SPECrate®2017\_int\_base = 252

SPECrate®2017\_int\_peak = 258

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E10(Z12PP-D32) Server System  
(2.40 GHz, Intel Xeon Silver 4314)

SPECrate®2017\_int\_base = 252

SPECrate®2017\_int\_peak = 258

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

## Peak Optimization Flags (Continued)

500.perlbench\_r (continued):

```
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmallo
```

502.gcc\_r: -m32

```
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib  
-ljemallo
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmallo
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.html>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.2022-10-12.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.2022-10-12.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.xml)



# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E10(Z12PP-D32) Server System  
(2.40 GHz, Intel Xeon Silver 4314)

SPECrate<sup>®</sup>2017\_int\_base = 252

SPECrate<sup>®</sup>2017\_int\_peak = 258

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.1.8 on 2022-10-08 21:30:36-0400.

Report generated on 2022-11-08 22:21:51 by CPU2017 PDF formatter v6442.

Originally published on 2022-11-08.