



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E12(K14PP-D24) Server System
4.10 GHz, AMD EPYC 9174F

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

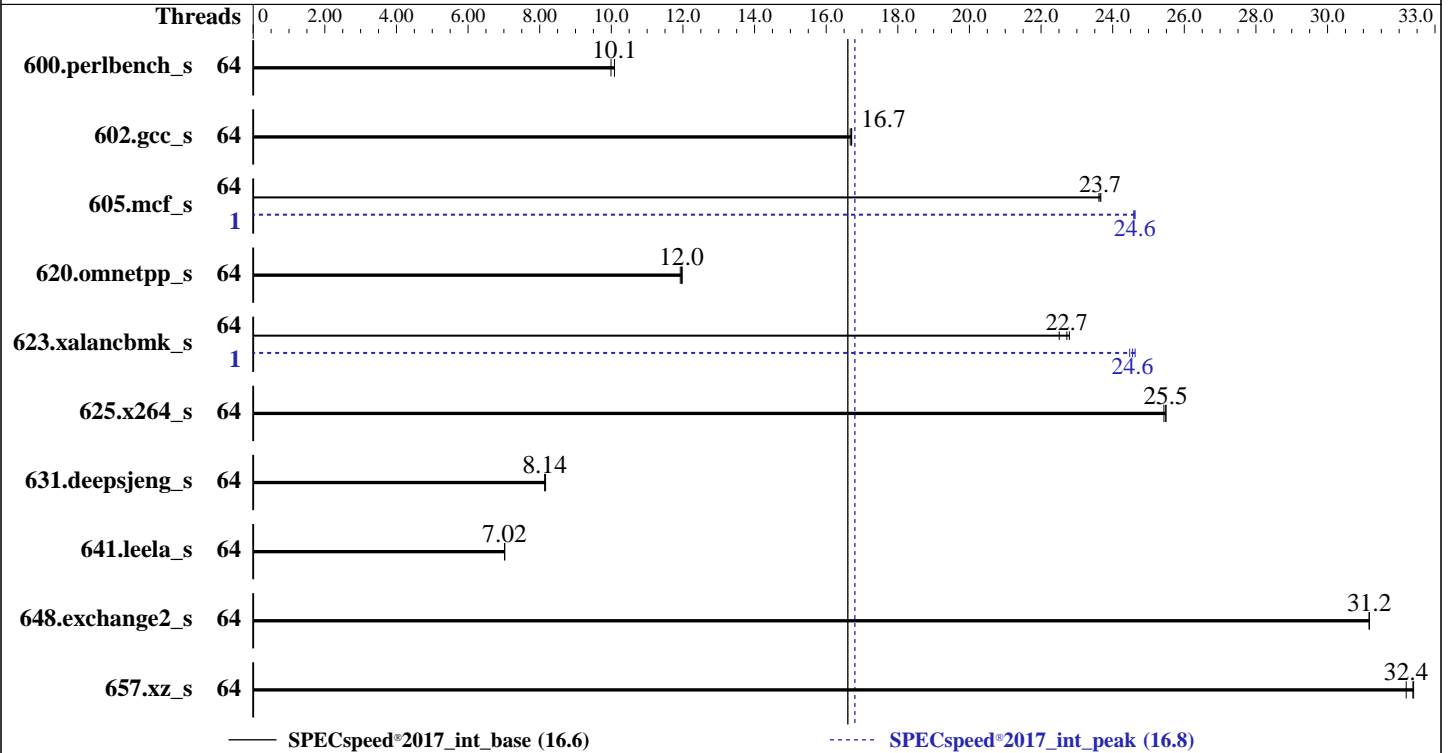

Hardware

CPU Name: AMD EPYC 9174F
 Max MHz: 4400
 Nominal: 4100
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 32 MB shared / 2 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1.6 TB PCIE NVME SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 0402 released Sep-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS700A-E12(K14PP-D24) Server System
4.10 GHz, AMD EPYC 9174F

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022
Hardware Availability: Nov-2022
Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	178	9.99	<u>176</u>	<u>10.1</u>	176	10.1	64	178	9.99	<u>176</u>	<u>10.1</u>	176	10.1
602.gcc_s	64	<u>238</u>	<u>16.7</u>	238	16.7	239	16.7	64	<u>238</u>	<u>16.7</u>	238	16.7	239	16.7
605.mcf_s	64	199	23.7	200	23.6	<u>200</u>	<u>23.7</u>	1	<u>192</u>	<u>24.6</u>	192	24.6	192	24.6
620.omnetpp_s	64	<u>136</u>	<u>12.0</u>	136	12.0	137	11.9	64	<u>136</u>	<u>12.0</u>	136	12.0	137	11.9
623.xalancbmk_s	64	<u>62.4</u>	<u>22.7</u>	63.0	22.5	62.2	22.8	1	57.5	24.6	<u>57.7</u>	<u>24.6</u>	57.9	24.5
625.x264_s	64	<u>69.2</u>	<u>25.5</u>	69.4	25.4	69.2	25.5	64	<u>69.2</u>	<u>25.5</u>	69.4	25.4	69.2	25.5
631.deepsjeng_s	64	176	8.16	176	8.14	<u>176</u>	<u>8.14</u>	64	176	8.16	176	8.14	<u>176</u>	<u>8.14</u>
641.leela_s	64	243	7.02	<u>243</u>	<u>7.02</u>	243	7.02	64	243	7.02	<u>243</u>	<u>7.02</u>	243	7.02
648.exchange2_s	64	<u>94.3</u>	<u>31.2</u>	94.3	31.2	94.4	31.2	64	<u>94.3</u>	<u>31.2</u>	94.3	31.2	94.4	31.2
657.xz_s	64	191	32.4	<u>191</u>	<u>32.4</u>	192	32.2	64	191	32.4	<u>191</u>	<u>32.4</u>	192	32.2

SPECspeed®2017_int_base = **16.6**

SPECspeed®2017_int_peak = **16.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E12(K14PP-D24) Server System
4.10 GHz, AMD EPYC 9174F

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH = "/spec2017b1/amd_speed_aocc400_genoa_B_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:
SR-IOV Support = Disabled
SVM Mode = Disabled
NUMA nodes per socket = NPS4
Determinism Control = Manual
Determinism Enable = Power
Engine Boost = Aggressive
TDP Control = Manual
TDP = 400
PPT Control = Manual
PPT = 400
BMC Configuration:
Fan mode = Full speed mode

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E12(K14PP-D24) Server System
4.10 GHz, AMD EPYC 9174F

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

Platform Notes (Continued)

sysinfo program /spec2017b1/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Sat Oct 22 07:15:50 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 9174F 16-Core Processor
2 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 8 9 16 17 24 25 32 33 40 41 48 49 56 57
physical 1: cores 0 1 8 9 16 17 24 25 32 33 40 41 48 49 56 57

From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9174F 16-Core Processor
CPU family: 25
Model: 17
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU max MHz: 4408.2998
CPU min MHz: 1500.0000
BogoMIPS: 8282.36
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E12(K14PP-D24) Server System
4.10 GHz, AMD EPYC 9174F

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

Platform Notes (Continued)

```
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pftthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_lld
```

Virtualization: AMD-V

L1d cache: 1 MiB (32 instances)

L1i cache: 1 MiB (32 instances)

L2 cache: 32 MiB (32 instances)

L3 cache: 512 MiB (16 instances)

NUMA node(s): 8

NUMA node0 CPU(s): 0-3,32-35

NUMA node1 CPU(s): 4-7,36-39

NUMA node2 CPU(s): 8-11,40-43

NUMA node3 CPU(s): 12-15,44-47

NUMA node4 CPU(s): 16-19,48-51

NUMA node5 CPU(s): 20-23,52-55

NUMA node6 CPU(s): 24-27,56-59

NUMA node7 CPU(s): 28-31,60-63

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data

cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0 1 2 3 32 33 34 35

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E12(K14PP-D24) Server System
4.10 GHz, AMD EPYC 9174F

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

Platform Notes (Continued)

```

node 0 size: 193256 MB
node 0 free: 192254 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 193519 MB
node 1 free: 193011 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 193519 MB
node 2 free: 192864 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 193519 MB
node 3 free: 192826 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 193519 MB
node 4 free: 193282 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 193321 MB
node 5 free: 193085 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 193485 MB
node 6 free: 193225 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 193519 MB
node 7 free: 193358 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10

```

```

From /proc/meminfo
MemTotal:      1584807548 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP4"
VERSION_ID="15.4"

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS700A-E12(K14PP-D24) Server System
4.10 GHz, AMD EPYC 9174F

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022
Hardware Availability: Nov-2022
Software Availability: Nov-2022

Platform Notes (Continued)

```
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp4"
```

```
uname -a:
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Oct 21 11:06
```

```
SPEC is set to: /spec2017b1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p8 xfs   500G   26G  475G   6% /
```

```
From /sys/devices/virtual/dmi/id
Vendor:          ASUSTeK COMPUTER INC.
Product:         RS700A-E12-RS12U
Product Family: Server
Serial:          123456789012
```

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
24x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS700A-E12(K14PP-D24) Server System
4.10 GHz, AMD EPYC 9174F

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022
Hardware Availability: Nov-2022
Software Availability: Nov-2022

Platform Notes (Continued)

BIOS:
BIOS Vendor: American Megatrends Inc.
BIOS Version: 0402
BIOS Date: 09/26/2022
BIOS Revision: 4.2

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
| peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
Fortran | 648.exchange2_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E12(K14PP-D24) Server System
4.10 GHz, AMD EPYC 9174F

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS700A-E12(K14PP-D24) Server System
4.10 GHz, AMD EPYC 9174F

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700A-E12(K14PP-D24) Server System
4.10 GHz, AMD EPYC 9174F

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264_s: basepeak = yes

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS700A-E12(K14PP-D24) Server System
4.10 GHz, AMD EPYC 9174F

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.0.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-10-21 19:15:49-0400.

Report generated on 2023-03-03 14:53:50 by CPU2017 PDF formatter v6442.

Originally published on 2022-11-11.