



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3


Test Date: Oct-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

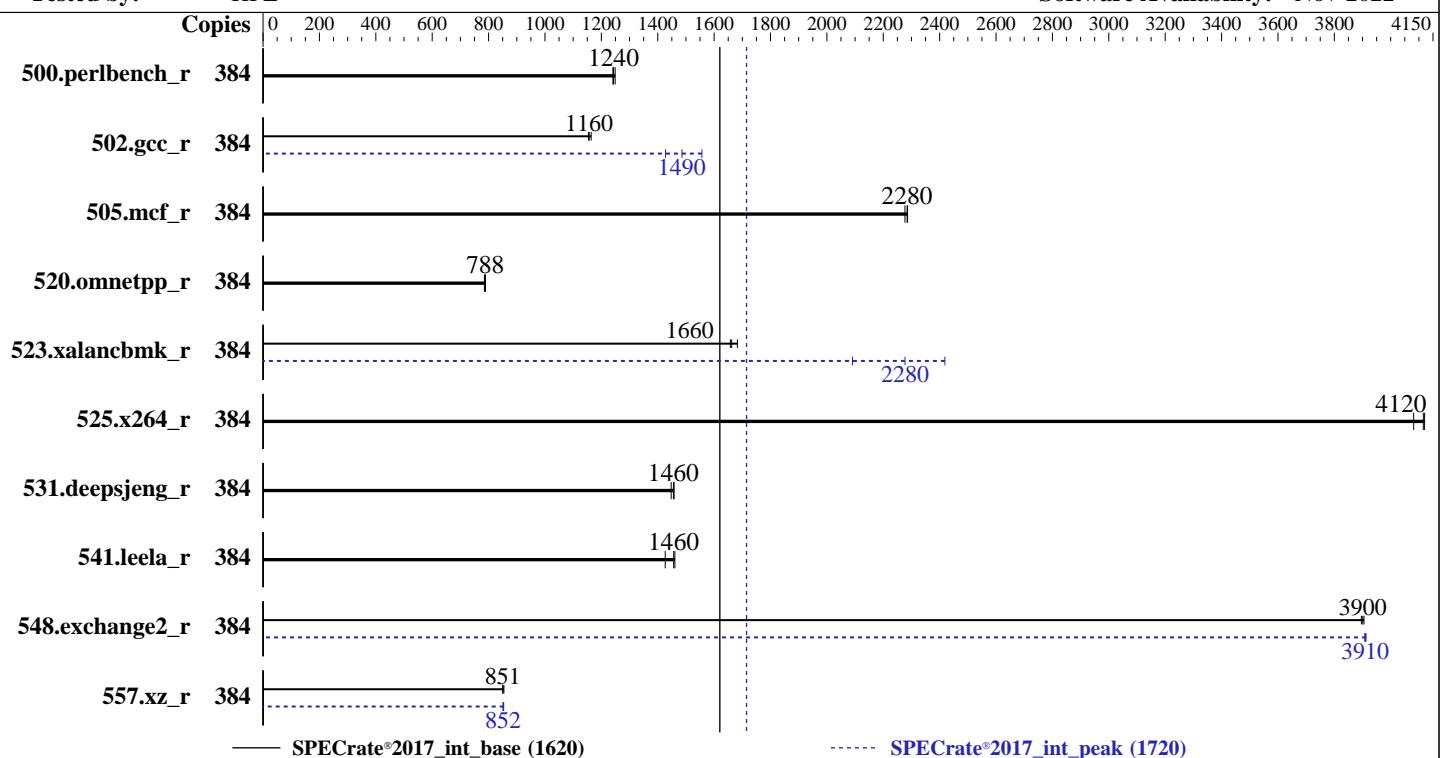

Hardware

CPU Name: AMD EPYC 9654

Max MHz: 3700

Nominal: 2400

Enabled: 192 cores, 2 chips, 2 threads/core

Orderable: 1,2 chips

Cache L1: 32 KB I + 32 KB D on chip per core

L2: 1 MB I+D on chip per core

L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores

Other: None

Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)

Storage: 2 x 480 GB SATA SSD

Other: None

Software

OS:

Ubuntu 22.04.1 LTS

Kernel 5.15.0-50-generic

C/C++/Fortran: Version 4.0.0 of AOCC

Parallel:

No

Firmware: HPE BIOS Version v1.10 10/06/2022 released

Oct-2022

File System:

ext4

System State: Run level 5 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

32/64-bit

Other:

None

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Date: Oct-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	493	1240	489	1250	492	1240	384	493	1240	489	1250	492	1240		
502.gcc_r	384	467	1160	471	1150	470	1160	384	349	1560	381	1430	366	1490		
505.mcf_r	384	273	2280	272	2280	271	2290	384	273	2280	272	2280	271	2290		
520.omnetpp_r	384	639	788	639	789	642	785	384	639	788	639	789	642	785		
523.xalancbmk_r	384	244	1660	245	1660	241	1680	384	168	2420	194	2090	178	2280		
525.x264_r	384	163	4120	165	4080	163	4120	384	163	4120	165	4080	163	4120		
531.deepsjeng_r	384	302	1460	302	1460	304	1450	384	302	1460	302	1460	304	1450		
541.leela_r	384	446	1430	437	1460	435	1460	384	446	1430	437	1460	435	1460		
548.exchange2_r	384	258	3900	258	3910	258	3900	384	257	3910	257	3910	257	3910		
557.xz_r	384	485	854	487	851	488	850	384	487	852	486	854	487	851		

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_rate_aocc400_genoa_B_lib/lib:/home/cpu2017/amd_rate_a
    occ400_genoa_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

The system ROM used for this result contains microcode version 0xa10110d for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version GenoaPI 1.0.0.1-L2

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d
running on admin1 Fri Oct 21 14:54:17 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 9654 96-Core Processor
  2 "physical id"s (chips)
  384 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 96
  siblings : 192
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
  81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
  81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
```

From lscpu from util-linux 2.37.2:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:  0-383
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9654 96-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   96
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:          3709.0000
CPU min MHz:          400.0000
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Date: Oct-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Platform Notes (Continued)

BogoMIPS:	4792.85
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pkru ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
Virtualization:	AMD-V
L1d cache:	6 MiB (192 instances)
L1i cache:	6 MiB (192 instances)
L2 cache:	192 MiB (192 instances)
L3 cache:	768 MiB (24 instances)
NUMA node(s):	24
NUMA node0 CPU(s):	0-7,192-199
NUMA node1 CPU(s):	8-15,200-207
NUMA node2 CPU(s):	16-23,208-215
NUMA node3 CPU(s):	24-31,216-223
NUMA node4 CPU(s):	32-39,224-231
NUMA node5 CPU(s):	40-47,232-239
NUMA node6 CPU(s):	48-55,240-247
NUMA node7 CPU(s):	56-63,248-255
NUMA node8 CPU(s):	64-71,256-263
NUMA node9 CPU(s):	72-79,264-271
NUMA node10 CPU(s):	80-87,272-279
NUMA node11 CPU(s):	88-95,280-287
NUMA node12 CPU(s):	96-103,288-295
NUMA node13 CPU(s):	104-111,296-303
NUMA node14 CPU(s):	112-119,304-311
NUMA node15 CPU(s):	120-127,312-319
NUMA node16 CPU(s):	128-135,320-327
NUMA node17 CPU(s):	136-143,328-335
NUMA node18 CPU(s):	144-151,336-343
NUMA node19 CPU(s):	152-159,344-351
NUMA node20 CPU(s):	160-167,352-359
NUMA node21 CPU(s):	168-175,360-367
NUMA node22 CPU(s):	176-183,368-375
NUMA node23 CPU(s):	184-191,376-383
Vulnerability Itlb multihit:	Not affected

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Date: Oct-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Platform Notes (Continued)

Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 24 nodes (0-23)
node 0 cpus: 0 1 2 3 4 5 6 7 192 193 194 195 196 197 198 199
node 0 size: 31941 MB
node 0 free: 31558 MB
node 1 cpus: 8 9 10 11 12 13 14 15 200 201 202 203 204 205 206 207
node 1 size: 32252 MB
node 1 free: 31992 MB
node 2 cpus: 16 17 18 19 20 21 22 23 208 209 210 211 212 213 214 215
node 2 size: 32252 MB
node 2 free: 31964 MB
node 3 cpus: 24 25 26 27 28 29 30 31 216 217 218 219 220 221 222 223
node 3 size: 32252 MB
node 3 free: 31989 MB
node 4 cpus: 32 33 34 35 36 37 38 39 224 225 226 227 228 229 230 231
node 4 size: 32252 MB
node 4 free: 31896 MB
node 5 cpus: 40 41 42 43 44 45 46 47 232 233 234 235 236 237 238 239
node 5 size: 32252 MB
node 5 free: 32003 MB
node 6 cpus: 48 49 50 51 52 53 54 55 240 241 242 243 244 245 246 247
node 6 size: 32252 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Date: Oct-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Platform Notes (Continued)

```
node 6 free: 31907 MB
node 7 cpus: 56 57 58 59 60 61 62 63 248 249 250 251 252 253 254 255
node 7 size: 32252 MB
node 7 free: 31996 MB
node 8 cpus: 64 65 66 67 68 69 70 71 256 257 258 259 260 261 262 263
node 8 size: 32252 MB
node 8 free: 31777 MB
node 9 cpus: 72 73 74 75 76 77 78 79 264 265 266 267 268 269 270 271
node 9 size: 32252 MB
node 9 free: 31975 MB
node 10 cpus: 80 81 82 83 84 85 86 87 272 273 274 275 276 277 278 279
node 10 size: 32252 MB
node 10 free: 32004 MB
node 11 cpus: 88 89 90 91 92 93 94 95 280 281 282 283 284 285 286 287
node 11 size: 32252 MB
node 11 free: 32004 MB
node 12 cpus: 96 97 98 99 100 101 102 103 288 289 290 291 292 293 294 295
node 12 size: 32252 MB
node 12 free: 32065 MB
node 13 cpus: 104 105 106 107 108 109 110 111 296 297 298 299 300 301 302 303
node 13 size: 32252 MB
node 13 free: 32014 MB
node 14 cpus: 112 113 114 115 116 117 118 119 304 305 306 307 308 309 310 311
node 14 size: 32252 MB
node 14 free: 32039 MB
node 15 cpus: 120 121 122 123 124 125 126 127 312 313 314 315 316 317 318 319
node 15 size: 32252 MB
node 15 free: 32048 MB
node 16 cpus: 128 129 130 131 132 133 134 135 320 321 322 323 324 325 326 327
node 16 size: 32252 MB
node 16 free: 32060 MB
node 17 cpus: 136 137 138 139 140 141 142 143 328 329 330 331 332 333 334 335
node 17 size: 32252 MB
node 17 free: 32031 MB
node 18 cpus: 144 145 146 147 148 149 150 151 336 337 338 339 340 341 342 343
node 18 size: 32252 MB
node 18 free: 32054 MB
node 19 cpus: 152 153 154 155 156 157 158 159 344 345 346 347 348 349 350 351
node 19 size: 32252 MB
node 19 free: 32059 MB
node 20 cpus: 160 161 162 163 164 165 166 167 352 353 354 355 356 357 358 359
node 20 size: 32216 MB
node 20 free: 31978 MB
node 21 cpus: 168 169 170 171 172 173 174 175 360 361 362 363 364 365 366 367
node 21 size: 32193 MB
node 21 free: 31924 MB
node 22 cpus: 176 177 178 179 180 181 182 183 368 369 370 371 372 373 374 375
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Date: Oct-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Platform Notes (Continued)

```
node 22 size: 32252 MB
node 22 free: 32029 MB
node 23 cpus: 184 185 186 187 188 189 190 191 376 377 378 379 380 381 382 383
node 23 size: 32252 MB
node 23 free: 32030 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15  16  17  18  19
20  21  22  23
  0: 10  12  12  12  11  12  12  12  11  12  12  12  12  32  32  32  32  32  32
  32  32  32  32
  1: 12  10  12  12  12  11  12  12  12  11  12  12  12  32  32  32  32  32  32
  32  32  32
  2: 12  12  10  12  12  12  11  12  12  12  11  12  12  32  32  32  32  32  32
  32  32  32
  3: 12  12  12  10  12  12  12  11  12  12  12  12  11  32  32  32  32  32  32
  32  32  32
  4: 11  12  12  12  10  12  12  12  11  12  12  12  12  32  32  32  32  32  32
  32  32  32
  5: 12  11  12  12  12  10  12  12  12  11  12  12  12  32  32  32  32  32  32
  32  32  32
  6: 12  12  11  12  12  12  10  12  12  12  11  12  12  32  32  32  32  32  32
  32  32  32
  7: 12  12  12  11  12  12  12  10  12  12  12  11  32  32  32  32  32  32
  32  32  32
  8: 11  12  12  12  11  12  12  12  12  10  12  12  12  32  32  32  32  32  32
  32  32  32
  9: 12  11  12  12  12  11  12  12  12  10  12  12  32  32  32  32  32  32
  32  32  32
 10: 12  12  11  12  12  12  12  11  12  12  12  10  12  32  32  32  32  32  32
 32  32  32
 11: 12  12  12  11  12  12  12  11  12  12  12  10  32  32  32  32  32  32
 32  32  32
 12: 32  32  32  32  32  32  32  32  32  32  32  32  32  10  12  12  12  11  12
 11  12  12
 13: 32  32  32  32  32  32  32  32  32  32  32  32  12  10  12  12  12  11  12
 12  11  12
 14: 32  32  32  32  32  32  32  32  32  32  32  32  12  12  10  12  12  12  11
 12  11  12
 15: 32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  10  12  12  12
 12  12  11
 16: 32  32  32  32  32  32  32  32  32  32  32  32  11  12  12  10  12  12  12
 11  12  12
 17: 32  32  32  32  32  32  32  32  32  32  32  32  12  11  12  12  12  12  10
 12  12  12
 18: 32  32  32  32  32  32  32  32  32  32  32  32  12  12  11  12  12  12  10
 12  12  12
 19: 32  32  32  32  32  32  32  32  32  32  32  32  12  12  11  12  12  12  10
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

```
12 12 12 11  
20: 32 32 32 32 32 32 32 32 32 32 32 32 32 11 12 12 12 11 12 12 12  
10 12 12 12  
21: 32 32 32 32 32 32 32 32 32 32 32 32 32 12 11 12 12 12 11 12 12  
12 10 12 12  
22: 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 11 12 12 11 12 11 12  
12 12 10 12  
23: 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 11 12 12 11 12 11 12  
12 12 12 10
```

From /proc/meminfo

```
MemTotal: 792212984 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

/sbin/tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: balanced

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

/usr/bin/lsb_release -d
Ubuntu 22.04.1 LTS

From /etc/*release* /etc/*version*
debian_version: bookworm/sid
os-release:
PRETTY_NAME="Ubuntu 22.04.1 LTS"
NAME="Ubuntu"
VERSION_ID="22.04"
VERSION="22.04.1 LTS (Jammy Jellyfish)"
VERSION_CODENAME=jammy
ID=ubuntu
ID_LIKE=debian
HOME_URL="https://www.ubuntu.com/"

uname -a:

```
Linux admin1 5.15.0-50-generic #56-Ubuntu SMP Tue Sep 20 13:23:26 UTC 2022 x86_64  
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

mmio_stale_data:

Not affected

retbleed:

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling, PBRSB-eIBRS: Not affected

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Oct 21 14:48

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	437G	31G	388G	8%	/

From /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL365 Gen11
Product Family:	ProLiant
Serial:	DL365G11-001

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Hynix HMCG88MEBRA113N 32 GB 2 rank 4800

BIOS:

BIOS Vendor:	HPE
BIOS Version:	1.10
BIOS Date:	10/06/2022
BIOS Revision:	1.10
Firmware Revision:	1.10

(End of data from sysinfo program)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----


=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----


=====
C      | 502.gcc_r(peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----


=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----


=====
C++    | 523.xalancbmk_r(peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Compiler Version Notes (Continued)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++ | 523.xalancbmk_r(peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

Fortran | 548.exchange2_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL365 Gen11 (2.40 GHz, AMD EPYC 9654)	SPECrate®2017_int_base = 1620 SPECrate®2017_int_peak = 1720
CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE	Test Date: Oct-2022 Hardware Availability: Dec-2022 Software Availability: Nov-2022

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather  
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang  
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lamdalloc-ext

Fortran benchmarks:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-flang -lamdalloc
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Peak Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIB -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdaloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: basepeak = yes
```

```
557.xz_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIB -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdaloc
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIB
-ffast-math -finline-aggressive
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

523.xalancbmk_r (continued):

```
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdalloc-ext
```

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc
```

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.0.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1620

SPECrate®2017_int_peak = 1720

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.0.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-10-21 10:54:16-0400.

Report generated on 2022-11-10 14:44:27 by CPU2017 PDF formatter v6442.

Originally published on 2022-11-10.