



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

SPECrate®2017\_int\_base = 1620

SPECrate®2017\_int\_peak = 1740

CPU2017 License: 001176


Test Date: Oct-2022

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Nov-2022

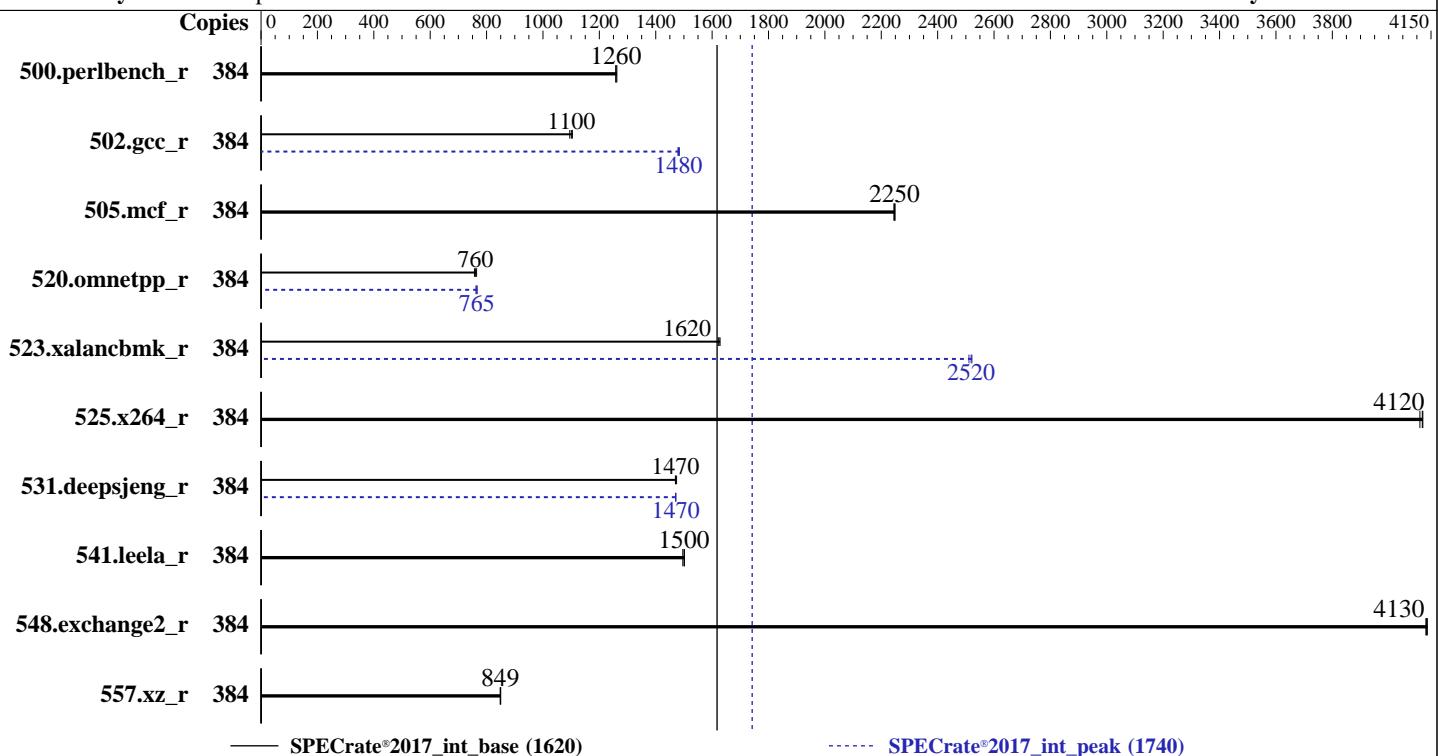

Hardware		Software	
CPU Name:	AMD EPYC 9654	OS:	Ubuntu 22.04.1 LTS
Max MHz:	3700	Compiler:	Kernel 5.15.0-52-generic
Nominal:	2400	Parallel:	C/C++/Fortran: Version 4.0.0 of AOCC
Enabled:	192 cores, 2 chips, 2 threads/core	Firmware:	No
Orderable:	1,2 chips	File System:	Version 0.10 released Oct-2022
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	tmpfs
L2:	1 MB I+D on chip per core	Base Pointers:	Run level 5 (multi-user)
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores	Peak Pointers:	64-bit
Other:	None	Other:	32/64-bit
Memory:	3 TB (24 x 128 GB 2Rx4 PC5-4800B-R)	Power Management:	None
Storage:	1.5 TB on tmpfs		BIOS and OS set to prefer performance at the cost of additional power usage.
Other:	None		



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

**SPECrate®2017\_int\_base = 1620**

**SPECrate®2017\_int\_peak = 1740**

CPU2017 License: 001176

Test Date: Oct-2022

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Nov-2022

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	484	1260	<b>486</b>	<b>1260</b>	486	1260	384	484	1260	<b>486</b>	<b>1260</b>	486	1260	486	1260
502.gcc_r	384	497	1100	<b>494</b>	<b>1100</b>	492	1100	384	366	1480	<b>367</b>	<b>1480</b>	368	1480		
505.mcf_r	384	<b>276</b>	<b>2250</b>	276	2240	276	2250	384	<b>276</b>	<b>2250</b>	276	2240	276	2250		
520.omnetpp_r	384	666	757	659	765	<b>663</b>	<b>760</b>	384	<b>659</b>	<b>765</b>	657	767	661	762		
523.xalancbmk_r	384	<b>250</b>	<b>1620</b>	250	1620	249	1630	384	161	2510	<b>161</b>	<b>2520</b>	161	2520		
525.x264_r	384	<b>163</b>	<b>4120</b>	163	4120	164	4110	384	<b>163</b>	<b>4120</b>	163	4120	164	4110		
531.deepsjeng_r	384	299	1470	<b>299</b>	<b>1470</b>	299	1470	384	<b>299</b>	<b>1470</b>	299	1470	299	1470		
541.leela_r	384	<b>424</b>	<b>1500</b>	423	1500	425	1500	384	<b>424</b>	<b>1500</b>	423	1500	425	1500		
548.exchange2_r	384	243	4130	243	4140	<b>243</b>	<b>4130</b>	384	243	4130	243	4140	<b>243</b>	<b>4130</b>		
557.xz_r	384	489	849	488	850	<b>489</b>	<b>849</b>	384	489	849	488	850	<b>489</b>	<b>849</b>		

**SPECrate®2017\_int\_base = 1620**

**SPECrate®2017\_int\_peak = 1740**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_int\_base = 1620

SPECrate®2017\_int\_peak = 1740

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/dev/shm/amd_rate_aocc400_genoa_B_lib/lib:/dev/shm/amd_rate_aocc400_gen
    oa_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

```
MALLOC_CONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Determinism Control = Manual

Determinism Enable = Disable Performance Determinism

cTDP Control = Manual

cTDP = 400

Package Power Limit Control = Manual

Package Power Limit = 400

ACPI SRAT L3 cache As NUMA Domain = Enabled

Sysinfo program /dev/shm/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

SPECrate®2017\_int\_base = 1620

SPECrate®2017\_int\_peak = 1740

CPU2017 License: 001176

Test Date: Oct-2022

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Nov-2022

## Platform Notes (Continued)

running on sysv Sun Oct 23 18:06:30 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 9654 96-Core Processor
  2 "physical id"s (chips)
  384 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 96
  siblings : 192
  physical 0: cores 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
  26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53
  54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81
  82 83 84 85 86 87 88 89 90 91 92 93 94 95
  physical 1: cores 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
  26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53
  54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81
  82 83 84 85 86 87 88 89 90 91 92 93 94 95
```

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 384
On-line CPU(s) list: 0-383
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9654 96-Core Processor
CPU family: 25
Model: 17
Thread(s) per core: 2
Core(s) per socket: 96
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU max MHz: 3709.0000
CPU min MHz: 400.0000
BogoMIPS: 4799.88
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr
      pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
      pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
      aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
      popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

**SPECrate®2017\_int\_base = 1620**

**SPECrate®2017\_int\_peak = 1740**

**CPU2017 License:** 001176

**Test Date:** Oct-2022

**Test Sponsor:** Supermicro

**Hardware Availability:** Nov-2022

**Tested by:** Supermicro

**Software Availability:** Nov-2022

## Platform Notes (Continued)

```

misalignsse 3dnowprefetch osw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
cqmq_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat
npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq
la57 rdpid overflow_recov succor smca fsrm flush_lld
Virtualization: AMD-V
L1d cache: 6 MiB (192 instances)
L1i cache: 6 MiB (192 instances)
L2 cache: 192 MiB (192 instances)
L3 cache: 768 MiB (24 instances)
NUMA node(s): 24
NUMA node0 CPU(s): 0-7,192-199
NUMA node1 CPU(s): 8-15,200-207
NUMA node2 CPU(s): 16-23,208-215
NUMA node3 CPU(s): 24-31,216-223
NUMA node4 CPU(s): 32-39,224-231
NUMA node5 CPU(s): 40-47,232-239
NUMA node6 CPU(s): 48-55,240-247
NUMA node7 CPU(s): 56-63,248-255
NUMA node8 CPU(s): 64-71,256-263
NUMA node9 CPU(s): 72-79,264-271
NUMA node10 CPU(s): 80-87,272-279
NUMA node11 CPU(s): 88-95,280-287
NUMA node12 CPU(s): 96-103,288-295
NUMA node13 CPU(s): 104-111,296-303
NUMA node14 CPU(s): 112-119,304-311
NUMA node15 CPU(s): 120-127,312-319
NUMA node16 CPU(s): 128-135,320-327
NUMA node17 CPU(s): 136-143,328-335
NUMA node18 CPU(s): 144-151,336-343
NUMA node19 CPU(s): 152-159,344-351
NUMA node20 CPU(s): 160-167,352-359
NUMA node21 CPU(s): 168-175,360-367
NUMA node22 CPU(s): 176-183,368-375
NUMA node23 CPU(s): 184-191,376-383
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

SPECrate®2017\_int\_base = 1620

SPECrate®2017\_int\_peak = 1740

CPU2017 License: 001176

Test Date: Oct-2022

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Nov-2022

## Platform Notes (Continued)

prctl and seccomp  
Vulnerability Spectre v1: Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation: Retpolines, IBPB conditional, IBRS\_FW, STIBP always-on, RSB filling, PBRSB-eIBRS Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 24 nodes (0-23)  
node 0 cpus: 0 1 2 3 4 5 6 7 192 193 194 195 196 197 198 199  
node 0 size: 128752 MB  
node 0 free: 128071 MB  
node 1 cpus: 8 9 10 11 12 13 14 15 200 201 202 203 204 205 206 207  
node 1 size: 129018 MB  
node 1 free: 128509 MB  
node 2 cpus: 16 17 18 19 20 21 22 23 208 209 210 211 212 213 214 215  
node 2 size: 129018 MB  
node 2 free: 128515 MB  
node 3 cpus: 24 25 26 27 28 29 30 31 216 217 218 219 220 221 222 223  
node 3 size: 128983 MB  
node 3 free: 128549 MB  
node 4 cpus: 32 33 34 35 36 37 38 39 224 225 226 227 228 229 230 231  
node 4 size: 129018 MB  
node 4 free: 128567 MB  
node 5 cpus: 40 41 42 43 44 45 46 47 232 233 234 235 236 237 238 239  
node 5 size: 129018 MB  
node 5 free: 128559 MB  
node 6 cpus: 48 49 50 51 52 53 54 55 240 241 242 243 244 245 246 247  
node 6 size: 129018 MB  
node 6 free: 128561 MB  
node 7 cpus: 56 57 58 59 60 61 62 63 248 249 250 251 252 253 254 255  
node 7 size: 129018 MB  
node 7 free: 128577 MB  
node 8 cpus: 64 65 66 67 68 69 70 71 256 257 258 259 260 261 262 263  
node 8 size: 129018 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

SPECrate®2017\_int\_base = 1620

SPECrate®2017\_int\_peak = 1740

CPU2017 License: 001176

Test Date: Oct-2022

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Nov-2022

## Platform Notes (Continued)

```
node 8 free: 128513 MB
node 9 cpus: 72 73 74 75 76 77 78 79 264 265 266 267 268 269 270 271
node 9 size: 129018 MB
node 9 free: 123678 MB
node 10 cpus: 80 81 82 83 84 85 86 87 272 273 274 275 276 277 278 279
node 10 size: 129018 MB
node 10 free: 128524 MB
node 11 cpus: 88 89 90 91 92 93 94 95 280 281 282 283 284 285 286 287
node 11 size: 129018 MB
node 11 free: 128600 MB
node 12 cpus: 96 97 98 99 100 101 102 103 288 289 290 291 292 293 294 295
node 12 size: 129018 MB
node 12 free: 128544 MB
node 13 cpus: 104 105 106 107 108 109 110 111 296 297 298 299 300 301 302 303
node 13 size: 129018 MB
node 13 free: 128721 MB
node 14 cpus: 112 113 114 115 116 117 118 119 304 305 306 307 308 309 310 311
node 14 size: 129018 MB
node 14 free: 128694 MB
node 15 cpus: 120 121 122 123 124 125 126 127 312 313 314 315 316 317 318 319
node 15 size: 129018 MB
node 15 free: 128716 MB
node 16 cpus: 128 129 130 131 132 133 134 135 320 321 322 323 324 325 326 327
node 16 size: 129018 MB
node 16 free: 128710 MB
node 17 cpus: 136 137 138 139 140 141 142 143 328 329 330 331 332 333 334 335
node 17 size: 129018 MB
node 17 free: 128726 MB
node 18 cpus: 144 145 146 147 148 149 150 151 336 337 338 339 340 341 342 343
node 18 size: 129018 MB
node 18 free: 128555 MB
node 19 cpus: 152 153 154 155 156 157 158 159 344 345 346 347 348 349 350 351
node 19 size: 129018 MB
node 19 free: 128718 MB
node 20 cpus: 160 161 162 163 164 165 166 167 352 353 354 355 356 357 358 359
node 20 size: 128951 MB
node 20 free: 128647 MB
node 21 cpus: 168 169 170 171 172 173 174 175 360 361 362 363 364 365 366 367
node 21 size: 129018 MB
node 21 free: 128678 MB
node 22 cpus: 176 177 178 179 180 181 182 183 368 369 370 371 372 373 374 375
node 22 size: 129018 MB
node 22 free: 128695 MB
node 23 cpus: 184 185 186 187 188 189 190 191 376 377 378 379 380 381 382 383
node 23 size: 129018 MB
node 23 free: 128727 MB
node distances:
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

SPECrate®2017\_int\_base = 1620

SPECrate®2017\_int\_peak = 1740

CPU2017 License: 001176

Test Date: Oct-2022

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Nov-2022

## Platform Notes (Continued)

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
20	21	22	23																	
0:	10	11	11	11	11	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32
32	32	32	32																	
1:	11	10	11	11	11	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32
32	32	32	32																	
2:	11	11	10	11	11	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32
32	32	32	32																	
3:	11	11	11	10	11	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32
32	32	32	32																	
4:	11	11	11	11	10	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32
32	32	32	32																	
5:	11	11	11	11	11	10	11	11	11	11	11	11	32	32	32	32	32	32	32	32
32	32	32	32																	
6:	11	11	11	11	11	11	10	11	11	11	11	11	32	32	32	32	32	32	32	32
32	32	32	32																	
7:	11	11	11	11	11	11	11	10	11	11	11	11	32	32	32	32	32	32	32	32
32	32	32	32																	
8:	11	11	11	11	11	11	11	11	10	11	11	11	32	32	32	32	32	32	32	32
32	32	32	32																	
9:	11	11	11	11	11	11	11	11	11	10	11	11	32	32	32	32	32	32	32	32
32	32	32	32																	
10:	11	11	11	11	11	11	11	11	11	11	10	11	32	32	32	32	32	32	32	32
32	32	32	32																	
11:	11	11	11	11	11	11	11	11	11	11	11	10	32	32	32	32	32	32	32	32
32	32	32	32																	
12:	32	32	32	32	32	32	32	32	32	32	32	32	10	11	11	11	11	11	11	11
11	11	11	11																	
13:	32	32	32	32	32	32	32	32	32	32	32	11	10	11	11	11	11	11	11	11
11	11	11	11																	
14:	32	32	32	32	32	32	32	32	32	32	32	11	11	10	11	11	11	11	11	11
11	11	11	11																	
15:	32	32	32	32	32	32	32	32	32	32	32	11	11	11	10	11	11	11	11	10
11	11	11	11																	
16:	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	10	11	11	11	11
11	11	11	11																	
17:	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	11	11
11	11	11	11																	
18:	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	10	11
11	11	11	11																	
19:	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	11	10
11	11	11	11																	
20:	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	11	11
10	11	11	11																	
21:	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	11	11
11	10	11	11																	
22:	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	11	11

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

SPECrate®2017\_int\_base = 1620

SPECrate®2017\_int\_peak = 1740

CPU2017 License: 001176

Test Date: Oct-2022

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Nov-2022

## Platform Notes (Continued)

```
11 11 10 11
23: 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11 11 11
```

From /proc/meminfo

```
MemTotal:      3170387988 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

/usr/bin/lsb\_release -d  
Ubuntu 22.04.1 LTS

From /etc/\*release\* /etc/\*version\*
debian\_version: bookworm/sid
os-release:
PRETTY\_NAME="Ubuntu 22.04.1 LTS"
NAME="Ubuntu"
VERSION\_ID="22.04"
VERSION="22.04.1 LTS (Jammy Jellyfish)"
VERSION\_CODENAME=jammy
ID=ubuntu
ID\_LIKE=debian
HOME\_URL="https://www.ubuntu.com/"

uname -a:

```
Linux sysv 5.15.0-52-generic #58-Ubuntu SMP Thu Oct 13 08:03:55 UTC 2022 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected
retbleed:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB conditional, IBRS_FW, STIBP:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_int\_base = 1620

SPECrate®2017\_int\_peak = 1740

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

always-on, RSB filling,  
PBRSB-eIBRS: Not affected

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Oct 23 17:54

SPEC is set to: /dev/shm

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	1.5T	4.8G	1.5T	1%	/dev/shm

From /sys/devices/virtual/dmi/id  
Vendor: Supermicro  
Product: Super Server  
Product Family: SMC H13  
Serial: 123456789

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x SK Hynix HMCT04MEERA135N 128 GB 2 rank 4800

BIOS:

BIOS Vendor:	American Megatrends International, LLC.
BIOS Version:	0.10
BIOS Date:	10/18/2022
BIOS Revision:	5.27

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

-----

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

SPECrate®2017\_int\_base = 1620

SPECrate®2017\_int\_peak = 1740

CPU2017 License: 001176

Test Date: Oct-2022

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

=====

C | 502.gcc\_r(peak)

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

=====

C++ | 523.xalancbmk\_r(peak)

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Supermicro**

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_int\_base = 1620

SPECrate®2017\_int\_peak = 1740

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++ | 523.xalancbmk\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

Fortran | 548.exchange2\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_int\_base = 1620

SPECrate®2017\_int\_peak = 1740

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -fno -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdaloc
```

C++ benchmarks:

```
-m64 -fno -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdaloc-ext
```

Fortran benchmarks:

```
-m64 -fno -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdaloc
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_int\_base = 1620

SPECrate®2017\_int\_peak = 1740

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Supermicro**

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

**SPECrate®2017\_int\_base = 1620**

**SPECrate®2017\_int\_peak = 1740**

**CPU2017 License:** 001176

**Test Date:** Oct-2022

**Test Sponsor:** Supermicro

**Hardware Availability:** Nov-2022

**Tested by:** Supermicro

**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: basepeak = yes
```

```
557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdalloc-ext
```

```
531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

```
541.leela_r: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2025HS-TNR  
(H13DSH , AMD EPYC 9654)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_int\_base = 1620

SPECrate®2017\_int\_peak = 1740

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument  
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd\_rate\_aocc400\_genoa\_B\_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk\_r: -L/usr/lib32 -Wno-unused-command-line-argument  
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd\_rate\_aocc400\_genoa\_B\_lib/lib32

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Genoa-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Genoa-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-10-23 14:06:29-0400.

Report generated on 2022-11-10 14:45:34 by CPU2017 PDF formatter v6442.

Originally published on 2022-11-10.