



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_base = 717

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

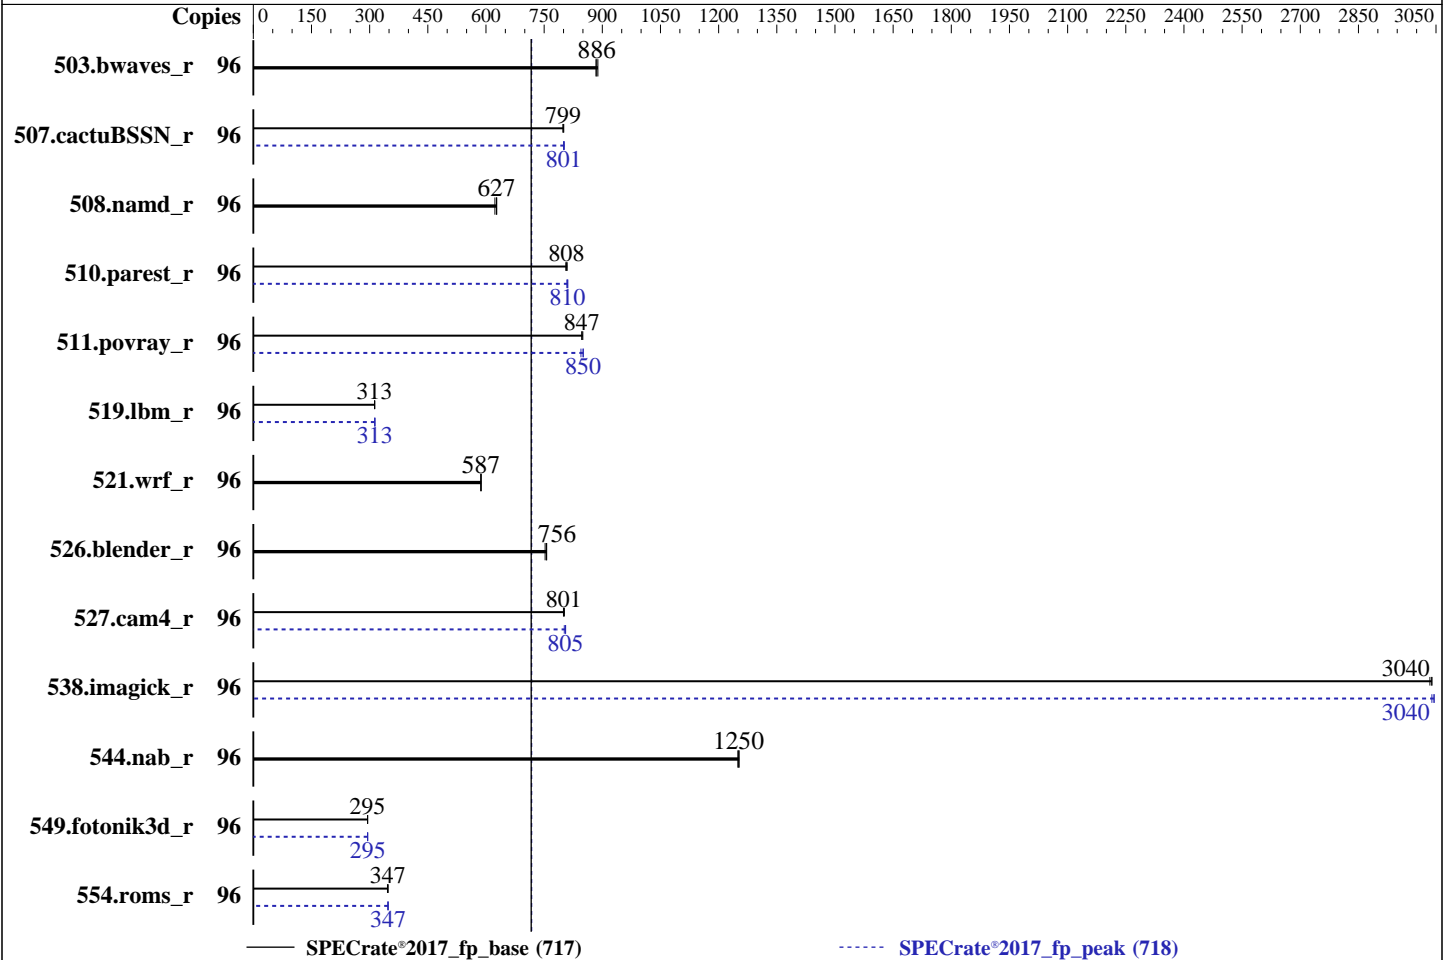

Hardware

CPU Name: AMD EPYC 9654
 Max MHz: 3700
 Nominal: 2400
 Enabled: 96 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip,
 32 MB shared / 8 cores
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Lenovo BIOS Version KAE105L 1.20 released Dec-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_base = 717

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1090	884	<u>1087</u>	<u>886</u>	1083	889	96	1090	884	<u>1087</u>	<u>886</u>	1083	889
507.cactuBSSN_r	96	152	799	152	801	<u>152</u>	<u>799</u>	96	152	800	152	802	<u>152</u>	<u>801</u>
508.namd_r	96	146	623	<u>145</u>	<u>627</u>	145	628	96	146	623	<u>145</u>	<u>627</u>	145	628
510.parest_r	96	312	806	<u>311</u>	<u>808</u>	310	809	96	311	809	310	811	<u>310</u>	<u>810</u>
511.povray_r	96	264	850	<u>265</u>	<u>847</u>	265	847	96	<u>264</u>	<u>850</u>	263	851	265	845
519.lbm_r	96	<u>323</u>	<u>313</u>	324	313	323	313	96	323	313	<u>323</u>	<u>313</u>	323	313
521.wrf_r	96	<u>366</u>	<u>587</u>	367	587	366	587	96	<u>366</u>	<u>587</u>	367	587	366	587
526.blender_r	96	<u>193</u>	<u>756</u>	193	757	194	752	96	<u>193</u>	<u>756</u>	193	757	194	752
527.cam4_r	96	209	802	<u>210</u>	<u>801</u>	210	800	96	209	805	<u>209</u>	<u>805</u>	209	802
538.imagick_r	96	78.7	3030	78.6	3040	<u>78.6</u>	<u>3040</u>	96	78.4	3050	78.6	3040	<u>78.4</u>	<u>3040</u>
544.nab_r	96	129	1250	129	1250	<u>129</u>	<u>1250</u>	96	129	1250	129	1250	<u>129</u>	<u>1250</u>
549.fotonik3d_r	96	1270	295	1269	295	<u>1269</u>	<u>295</u>	96	1270	294	1269	295	<u>1269</u>	<u>295</u>
554.roms_r	96	<u>440</u>	<u>347</u>	441	346	439	347	96	439	348	<u>439</u>	<u>347</u>	440	347

SPECrate®2017_fp_base = **717**

SPECrate®2017_fp_peak = **718**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_base = 717

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/amd_rate_aocc400_genoa_B_lib/
lib:/home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/amd_rate_aocc400_genoa_B_l
ib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Operating Mode set to Maximum Performance and then set it to Custom Mode
NUMA Nodes per Socket set to NPS4
L2 Stream HW Prefetcher set to Disabled
SMT Mode set to Disabled

Sysinfo program /home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Sat Jan 21 16:26:17 2023

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 717

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2023
Hardware Availability: Apr-2023
Software Availability: Nov-2022

Platform Notes (Continued)

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : AMD EPYC 9654 96-Core Processor
 1 "physical id"s (chips)
 96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 96
siblings  : 96
physical 0: cores 0 1 2 3 4 5 6 7 20 21 22 23 36 37 38 39 48 49 50 51 52 53 54 55
64 65 66 67 68 69 70 71 84 85 86 87 96 97 98 99 100 101 102 103 112 113 114 115 116
117 118 119 128 129 130 131 132 133 134 135 144 145 146 147 148 149 150 151 160 161
162 163 164 165 166 167 176 177 178 179 180 181 182 183

```

```

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:  0-95
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9654 96-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   1
Core(s) per socket:   96
Socket(s):             1
Stepping:              1
Frequency boost:      enabled
CPU max MHz:          3707.8120
CPU min MHz:          1500.0000
BogoMIPS:              4792.37
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 717

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_lld

```

Virtualization: AMD-V
L1d cache: 3 MiB (96 instances)
L1i cache: 3 MiB (96 instances)
L2 cache: 96 MiB (96 instances)
L3 cache: 384 MiB (12 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-23
NUMA node1 CPU(s): 24-47
NUMA node2 CPU(s): 48-71
NUMA node3 CPU(s): 72-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3M	8	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	8	Unified	2	2048	1	64
L3	32M	384M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data
cache size : 1024 KB

From numactl --hardware

```

WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
node 0 size: 96489 MB
node 0 free: 95461 MB
node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
node 1 size: 96736 MB
node 1 free: 96321 MB
node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
node 2 size: 96736 MB
node 2 free: 96286 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_base = 717

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
node 3 size: 96506 MB
node 3 free: 95984 MB
node distances:
node  0  1  2  3
  0:  10  12  12  12
  1:  12  10  12  12
  2:  12  12  10  12
  3:  12  12  12  10

```

```

From /proc/meminfo
MemTotal:      395743524 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP4"
VERSION_ID="15.4"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp4"

```

```

uname -a:
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):               Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Retpolines, IBPB:
conditional, IBRS_FW, STIBP:

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_base = 717

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2023
Hardware Availability: Apr-2023
Software Availability: Nov-2022

Platform Notes (Continued)

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Jan 18 17:12

SPEC is set to: /home/cpu2017-1.1.8-amd-aocc400-genoa-Blb
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 446G 24G 422G 6% /

From /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR635V3
Product Family: ThinkSystem
Serial: 1234567890

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
4x SK Hynix HMC88AE115N 32 GB 2 rank 4800
8x SK Hynix HMC88AE168N 32 GB 2 rank 4800

BIOS:
BIOS Vendor: Lenovo
BIOS Version: KAE105L-1.20
BIOS Date: 12/29/2022
BIOS Revision: 1.20
Firmware Revision: 1.30

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
  | 544.nab_r(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOC4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 717

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_base = 717

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

Compiler Version Notes (Continued)

| 554.roms_r(base, peak)

```

-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

```

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

```

-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_base = 717

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang

```

C++ benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

```

Fortran benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_base = 717

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_base = 717

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

Base Other Flags (Continued)

Benchmarks using both Fortran and C:

`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:

`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:

`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:

`clang`

C++ benchmarks:

`clang++`

Fortran benchmarks:

`flang`

Benchmarks using both Fortran and C:

`flang clang`

Benchmarks using both C and C++:

`clang++ clang`

Benchmarks using Fortran, C, and C++:

`clang++ clang flang`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

`519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math`

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_base = 717

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

519.lbm_r (continued):

```
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

538.imagick_r: Same as 519.lbm_r

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

```
549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -lflang
```

```
554.roms_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang
```

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_base = 717

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

```
527.cam4_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -faggressive-loop-transform -fvectors-transform
-fscalar-transform -Mrecursive -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang
```

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_fp_base = 717

SPECrate®2017_fp_peak = 718

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-Q.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-Q.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2023-01-21 03:26:17-0500.

Report generated on 2023-02-23 17:28:19 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-23.