



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 719

SPECrate®2017_fp_peak = 746

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

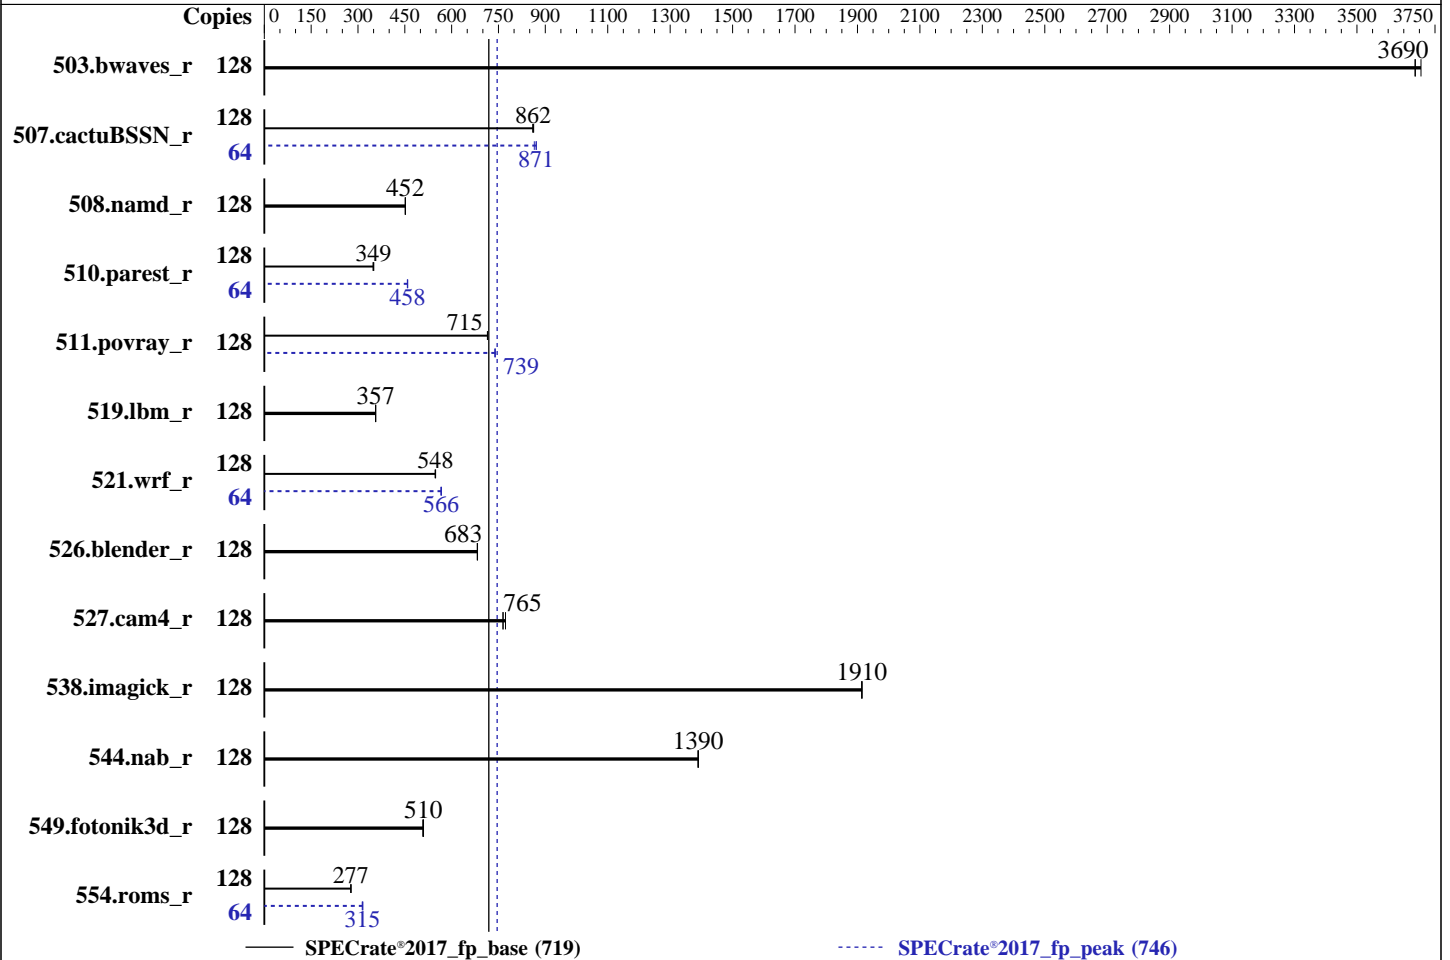

Hardware

CPU Name: Intel Xeon Gold 6448H
 Max MHz: 4100
 Nominal: 2400
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
 Kernel 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: HPE BIOS Version v1.40 05/18/2023 released May-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 719

SPECrate®2017_fp_peak = 746

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	346	3710	348	3690	348	3690	128	346	3710	348	3690	348	3690
507.cactuBSSN_r	128	188	862	189	860	188	863	64	93.7	865	93.0	871	93.1	871
508.namd_r	128	269	452	269	452	269	452	128	269	452	269	452	269	452
510.parest_r	128	958	349	961	348	955	351	64	364	459	365	458	365	458
511.povray_r	128	418	715	418	715	418	715	128	405	739	404	739	404	740
519.lbm_r	128	379	356	378	357	378	357	128	379	356	378	357	378	357
521.wrf_r	128	524	547	523	549	523	548	64	253	566	253	568	253	566
526.blender_r	128	285	683	286	682	285	683	128	285	683	286	682	285	683
527.cam4_r	128	293	765	290	773	293	765	128	293	765	290	773	293	765
538.imagick_r	128	166	1910	166	1910	166	1910	128	166	1910	166	1910	166	1910
544.nab_r	128	155	1390	155	1390	155	1390	128	155	1390	155	1390	155	1390
549.fotonik3d_r	128	978	510	979	510	983	508	128	978	510	979	510	983	508
554.roms_r	128	733	278	734	277	734	277	64	323	315	324	314	322	315

SPECrate®2017_fp_base = **719**

SPECrate®2017_fp_peak = **746**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 719

SPECrate®2017_fp_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b0004a1 for the Intel Xeon Gold 6448H processor.

BIOS Configuration:

Workload Profile set to General Throughput Compute

Thermal Configuration set to Maximum Cooling

Enhanced Processor Performance Profile set to Aggressive

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Memory Patrol Scrubbing set to Disabled

Workload Profile set to Custom

DCU Stream Prefetcher set to Disabled

Adjacent Sector Prefetch set to Disabled

Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Wed Jun 14 07:31:17 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
 24. BIOS
-

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 719

SPECrate®2017_fp_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

1. `uname -a`
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux

2. `w`
07:31:17 up 1 min, 0 users, load average: 0.42, 0.17, 0.06
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

3. `Username`
From environment variable \$USER: root

4. `ulimit -a`
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062703
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062703
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. `sysinfo process ancestry`
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd \$SPEC/ && \$SPEC/fprate_spr.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. `/proc/cpuinfo`
model name : Intel(R) Xeon(R) Gold 6448H
vendor_id : GenuineIntel
cpu family : 6
model : 143
stepping : 7
microcode : 0x2b0004a1

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 719

SPECrate®2017_fp_peak = 746

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
bugs          : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores     : 32
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Gold 6448H
BIOS Model name:       Intel(R) Xeon(R) Gold 6448H
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
Stepping:               7
BogoMIPS:               4800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-31,64-95
NUMA node1 CPU(s):    32-63,96-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 719

SPECrate®2017_fp_peak = 746

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-31,64-95
node 0 size: 257691 MB
node 0 free: 256702 MB
node 1 cpus: 32-63,96-127
node 1 size: 258023 MB
node 1 free: 257038 MB
node distances:
node 0 1
0: 10 20
1: 20 10

9. /proc/meminfo

MemTotal: 528092516 kB

10. who -r

run-level 3 Jun 14 07:30

11. Systemd service manager version: systemd 250 (250-6.e19_0)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT LOAD ACTIVE SUB DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd
systemd-network-generator tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower debug-shell
hwloc-dump-hwdata ipsec kvm_stat man-db-restart-cache-update nftables powertop rdisc rhsm
rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 719

SPECrate®2017_fp_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

indirect systemd-pstore systemd-sysex
sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

15. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

16. tuned-adm active
Current active profile: throughput-performance

17. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

18. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 719

SPECrate®2017_fp_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

pages_to_scan 4096
scan_sleep_millisecs 10000

20. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

21. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 372G 111G 262G 30% /home

22. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: ProLiant DL380 Gen11
Product Family: ProLiant
Serial: CNX21000G8

23. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
1x Hynix HMC88AEBRA168N 32 GB 2 rank 4800
15x Hynix HMC88MEBRA113N 32 GB 2 rank 4800

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: HPE
BIOS Version: 1.40
BIOS Date: 05/18/2023
BIOS Revision: 1.40
Firmware Revision: 1.10

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 719

SPECrate®2017_fp_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 719

SPECrate®2017_fp_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 719

SPECrate®2017_fp_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 719

SPECrate®2017_fp_peak = 746

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 719

SPECrate®2017_fp_peak = 746

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev2.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev2.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-13 22:01:17-0400.

Report generated on 2023-07-05 11:04:18 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-04.