



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Silver 4410Y)

**SPECspeed®2017\_int\_base = 13.8**

**SPECspeed®2017\_int\_peak = 14.1**

CPU2017 License: 3


**Test Date:** May-2023

**Test Sponsor:** HPE

**Hardware Availability:** Mar-2023

**Tested by:** HPE

**Software Availability:** Mar-2023

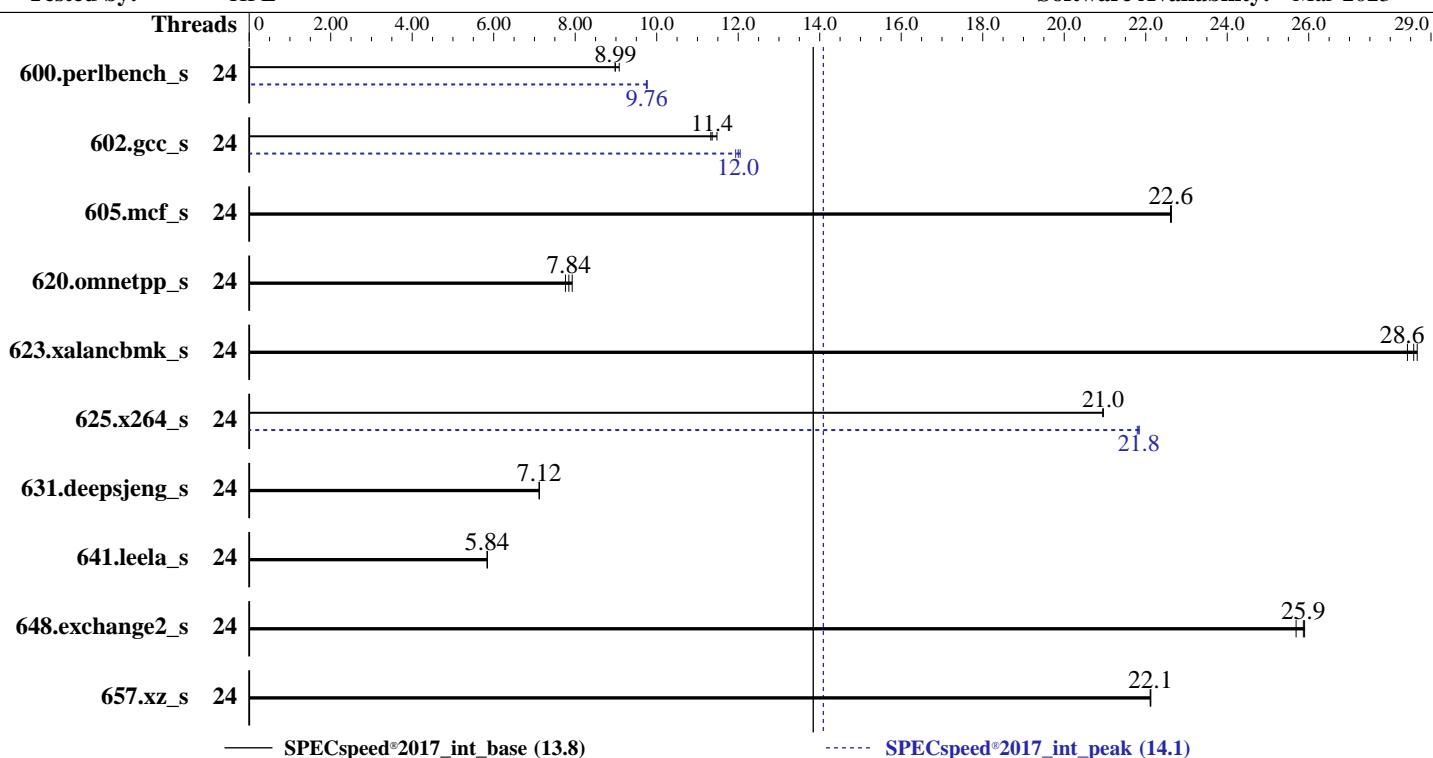

## Hardware

CPU Name: Intel Xeon Silver 4410Y  
 Max MHz: 3900  
 Nominal: 2000  
 Enabled: 24 cores, 2 chips  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 30 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R, running at 4000)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

## Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 Compiler: Kernel 5.14.0-70.13.1.el9\_0.x86\_64  
 C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 C/C++: Version 2023.0 of Intel C/C++ Compiler for Linux  
 Parallel: Yes  
 Firmware: HPE BIOS Version v1.30 03/01/2023 released Mar-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Silver 4410Y)

**SPECspeed®2017\_int\_base = 13.8**

**SPECspeed®2017\_int\_peak = 14.1**

CPU2017 License: 3

Test Date: May-2023

Test Sponsor: HPE

Hardware Availability: Mar-2023

Tested by: HPE

Software Availability: Mar-2023

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	24	198	8.98	195	9.08	<b><u>197</u></b>	<b><u>8.99</u></b>	24	182	9.75	182	9.76	<b><u>182</u></b>	<b><u>9.76</u></b>		
602.gcc_s	24	352	11.3	<b><u>351</u></b>	<b><u>11.4</u></b>	347	11.5	24	331	12.0	334	11.9	<b><u>332</u></b>	<b><u>12.0</u></b>		
605.mcf_s	24	209	22.6	209	22.6	<b><u>209</u></b>	<b><u>22.6</u></b>	24	209	22.6	209	22.6	<b><u>209</u></b>	<b><u>22.6</u></b>		
620.omnetpp_s	24	<b><u>208</u></b>	<b><u>7.84</u></b>	206	7.93	210	7.76	24	<b><u>208</u></b>	<b><u>7.84</u></b>	206	7.93	210	7.76		
623.xalancbmk_s	24	<b><u>49.6</u></b>	<b><u>28.6</u></b>	49.9	28.4	49.4	28.7	24	<b><u>49.6</u></b>	<b><u>28.6</u></b>	49.9	28.4	49.4	28.7		
625.x264_s	24	<b><u>84.2</u></b>	<b><u>21.0</u></b>	84.2	21.0	84.2	20.9	24	<b><u>80.8</u></b>	<b><u>21.8</u></b>	80.9	21.8	80.8	21.8		
631.deepsjeng_s	24	201	7.12	<b><u>201</u></b>	<b><u>7.12</u></b>	201	7.12	24	201	7.12	<b><u>201</u></b>	<b><u>7.12</u></b>	201	7.12		
641.leela_s	24	292	5.84	<b><u>292</u></b>	<b><u>5.84</u></b>	292	5.84	24	292	5.84	<b><u>292</u></b>	<b><u>5.84</u></b>	292	5.84		
648.exchange2_s	24	114	25.7	114	25.9	<b><u>114</u></b>	<b><u>25.9</u></b>	24	114	25.7	114	25.9	<b><u>114</u></b>	<b><u>25.9</u></b>		
657.xz_s	24	279	22.1	280	22.1	<b><u>280</u></b>	<b><u>22.1</u></b>	24	279	22.1	280	22.1	<b><u>280</u></b>	<b><u>22.1</u></b>		
<b>SPECspeed®2017_int_base = 13.8</b>																
<b>SPECspeed®2017_int_peak = 14.1</b>																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
IRQ balance service was stopped using "systemctl stop irqbalance.service"
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Silver 4410Y)

**SPECspeed®2017\_int\_base = 13.8**

**SPECspeed®2017\_int\_peak = 14.1**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Mar-2023

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000161 for the Intel Xeon Silver 4410Y processor.

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute

Thermal Configuration set to Maximum Cooling

Intel Hyper-Threading set to Disabled

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Dead Block Predictor set to Enabled

Sub-NUMA Clustering set to Enabled SNC2(2-clusters)

Workload Profile set to Custom

Adjacent Sector Prefetch set to Disabled

Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Wed May 24 16:41:24 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Silver 4410Y)

SPECspeed®2017\_int\_base = 13.8

SPECspeed®2017\_int\_peak = 14.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Mar-2023

Software Availability: Mar-2023

## Platform Notes (Continued)

21. dmidecode  
22. BIOS

1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.el9\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64  
x86\_64 x86\_64 GNU/Linux

2. w  
16:41:24 up 15 min, 0 users, load average: 0.00, 0.00, 0.00  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

3. Username  
From environment variable \$USER: root

4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 2062864  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 2062864  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root [priv]  
sshd: root@notty  
bash -c cd \$SPEC/ && \$SPEC/SPR\_intspeed.sh  
runcpu --nobuild --action validate --define default-platform-flags -c  
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=24 --tune base,peak -o all --define  
intspeedaffinity --define drop\_caches intspeed  
runcpu --nobuild --action validate --define default-platform-flags --configfile  
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=24 --tune base,peak --output\_format all  
--define intspeedaffinity --define drop\_caches --nopower --runmode speed --tune base:peak --size refspeed  
intspeed --nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log  
--lognum 001.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017

6. /proc/cpuinfo  
model name : Intel(R) Xeon(R) Silver 4410Y  
vendor\_id : GenuineIntel

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Silver 4410Y)

**SPECspeed®2017\_int\_base = 13.8**

**SPECspeed®2017\_int\_peak = 14.1**

CPU2017 License: 3

**Test Date:** May-2023

Test Sponsor: HPE

**Hardware Availability:** Mar-2023

Tested by: HPE

**Software Availability:** Mar-2023

## Platform Notes (Continued)

```

cpu family      : 6
model          : 143
stepping       : 7
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 12
siblings       : 12
2 physical ids (chips)
24 processors (hardware threads)
physical id 0: core ids 0-11
physical id 1: core ids 0-11
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22
physical id 1: apicids 128,130,132,134,136,138,140,142,144,146,148,150
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

---

### 7. lscpu

```

From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                24
On-line CPU(s) list:   0-23
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Silver 4410Y
BIOS Model name:        Intel(R) Xeon(R) Silver 4410Y
CPU family:             6
Model:                 143
Thread(s) per core:    1
Core(s) per socket:    12
Socket(s):              2
Stepping:               7
BogoMIPS:               4000.00
Flags:
Virtualization:         VT-x
L1d cache:              1.1 MiB (24 instances)
L1i cache:              768 KiB (24 instances)
L2 cache:               48 MiB (24 instances)
L3 cache:               60 MiB (2 instances)
NUMA node(s):            4

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Silver 4410Y)

SPECspeed®2017\_int\_base = 13.8

SPECspeed®2017\_int\_peak = 14.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Mar-2023

Software Availability: Mar-2023

## Platform Notes (Continued)

```
NUMA node0 CPU(s):          0-2,12-14
NUMA node1 CPU(s):          3-5,15-17
NUMA node2 CPU(s):          6-8,18-20
NUMA node3 CPU(s):          9-11,21-23
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	2M	48M	16	Unified	2	2048	1	64
L3	30M	60M	15	Unified	3	32768	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-2,12-14

node 0 size: 128735 MB

node 0 free: 128466 MB

node 1 cpus: 3-5,15-17

node 1 size: 129022 MB

node 1 free: 128511 MB

node 2 cpus: 6-8,18-20

node 2 size: 128986 MB

node 2 free: 128687 MB

node 3 cpus: 9-11,21-23

node 3 size: 129011 MB

node 3 free: 128790 MB

node distances:

node 0 1 2 3

0: 10 20 30 30

1: 20 10 30 30

2: 30 30 10 20

3: 30 30 20 10

-----  
9. /proc/meminfo

MemTotal: 528134064 kB

-----  
10. who -r

run-level 3 May 24 16:26

-----  
11. Systemd service manager version: systemd 250 (250-6.el9\_0)

Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files

STATE UNIT FILES

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Silver 4410Y)

**SPECspeed®2017\_int\_base = 13.8**

**SPECspeed®2017\_int\_peak = 14.1**

CPU2017 License: 3

Test Date: May-2023

Test Sponsor: HPE

Hardware Availability: Mar-2023

Tested by: HPE

Software Availability: Mar-2023

## Platform Notes (Continued)

```

enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                dbus-broker firewalld getty@ irqbalance iscsi iscsi-onboot kdump libstoragemgmt
                lvm2-monitor mdmonitor microcode multipathd nis-domainname rhsmcertd rpcbind rsyslog
                selinux-autorelabel-mark sshd sssd sysstat systemd-network-generator udisks2 upower
                virtqemud
enabled-runtime   systemd-remount-fs
disabled         blk-availability brltty canberra-system-bootup canberra-system-shutdown
                canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell dnsmasq
                gssproxy httpd httpd@ hwloc-dump-hwdata ipa-custodia iscsid iscsiuio kvm_stat
                libvirt-guests libvirtd man-db-restart-cache-update ndctl-monitor nfs-blkmap nfs-server
                nftables nmb numad pmcd pmfind pmie pmie_farm pmlogger pmlogger_farm pmproxy radiusd rdisc
                rhsm rhsm-facts rpmdb-rebuild saslauthd serial-getty@ smb speech-dispatcherd sshd-keygen@
                systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysext virtnetworkd
                virtproxyd virtsecretd virtstored winbind
indirect          pcsd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd
                virtlogd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.e19_0.x86_64
    root=/dev/mapper/rhel-root
    ro
    resume=/dev/mapper/rhel-swap
    rd.lvm.lv=rhel/root
    rd.lvm.lv=rhel/swap

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

-----
16. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Silver 4410Y)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017\_int\_base = 13.8

SPECspeed®2017\_int\_peak = 14.1

Test Date: May-2023

Hardware Availability: Mar-2023

Software Availability: Mar-2023

## Platform Notes (Continued)

```
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag 1
    max_ptes_none 511
    max_ptes_shared 256
    max_ptes_swap 64
    pages_to_scan 4096
    scan_sleep_millisecs 10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release Red Hat Enterprise Linux 9.0 (Plow)
    redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
    system-release Red Hat Enterprise Linux release 9.0 (Plow)

-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  372G  197G  175G  53% /home

-----
20. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant ML350 Gen11
Product Family:  ProLiant
Serial:          CNX20800P4

-----
21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  3x Hynix HMCG88AEBRA168N 32 GB 2 rank 4800, configured at 4000
  9x Hynix HMCG88MEBRA113N 32 GB 2 rank 4800, configured at 4000
  4x Hynix HMCG88MEBRA115N 32 GB 2 rank 4800, configured at 4000

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      HPE
BIOS Version:     1.30
BIOS Date:        03/01/2023
BIOS Revision:    1.30
Firmware Revision: 1.20
```

## Compiler Version Notes

=====

C	600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)	657.xz_s(base, peak)
---	------------------------------------------------------------------------------------------------	----------------------

=====

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Silver 4410Y)

**SPECspeed®2017\_int\_base = 13.8**

**SPECspeed®2017\_int\_peak = 14.1**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Mar-2023

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 648.exchange2\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Silver 4410Y)

**SPECspeed®2017\_int\_base = 13.8**

**SPECspeed®2017\_int\_peak = 14.1**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Mar-2023

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fno-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-fno-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fno-finite-math-only  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-fno-strict-overflow -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fopenmp -DSPEC_OPENMP -fno-strict-overflow
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Silver 4410Y)

SPECspeed®2017\_int\_base = 13.8

SPECspeed®2017\_int\_peak = 14.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Mar-2023

Software Availability: Mar-2023

## Peak Optimization Flags (Continued)

600.perlbench\_s (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.propdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf\_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Silver 4410Y)

**SPECspeed®2017\_int\_base = 13.8**

**SPECspeed®2017\_int\_peak = 14.1**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Mar-2023

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-24 07:11:24-0400.

Report generated on 2024-01-29 17:53:59 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-04.