



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 566

## PowerEdge XE8640 (Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_peak = 585

CPU2017 License: 6573


Test Date: Jun-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

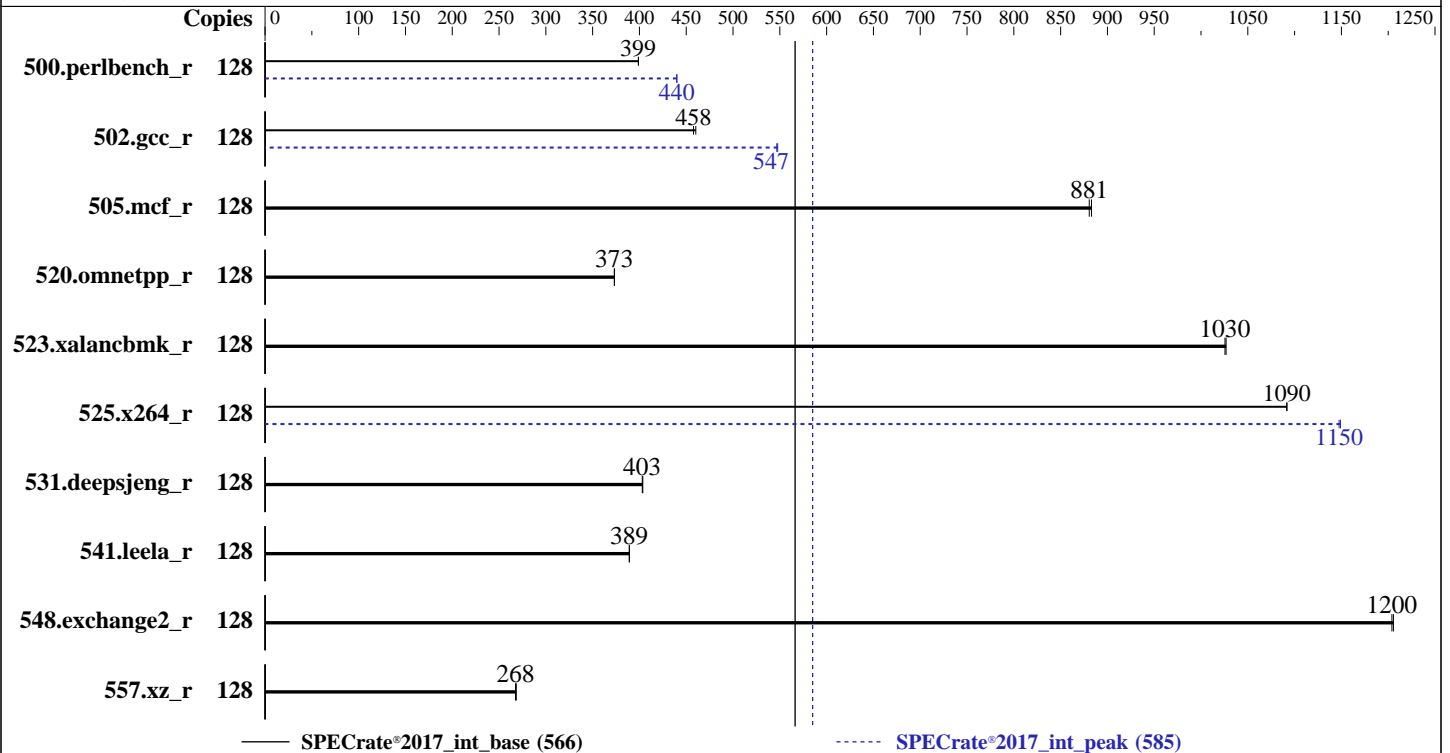

### Hardware

CPU Name: Intel Xeon Gold 6448Y  
 Max MHz: 4100  
 Nominal: 2100  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 80 GB on tmpfs  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.19-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 1.2.1 released May-2023  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 566

PowerEdge XE8640 (Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_peak = 585

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Results Table

| Benchmark       | Base   |                   |                   |                   |                    |         |       | Peak   |                   |                   |                   |                    |         |       |
|-----------------|--------|-------------------|-------------------|-------------------|--------------------|---------|-------|--------|-------------------|-------------------|-------------------|--------------------|---------|-------|
|                 | Copies | Seconds           | Ratio             | Seconds           | Ratio              | Seconds | Ratio | Copies | Seconds           | Ratio             | Seconds           | Ratio              | Seconds | Ratio |
| 500.perlbench_r | 128    | 511               | 399               | <b><u>511</u></b> | <b><u>399</u></b>  |         |       | 128    | <b><u>463</u></b> | <b><u>440</u></b> | 463               | 440                |         |       |
| 502.gcc_r       | 128    | <b><u>396</u></b> | <b><u>458</u></b> | 394               | 460                |         |       | 128    | <b><u>332</u></b> | <b><u>547</u></b> | 331               | 548                |         |       |
| 505.mcf_r       | 128    | 234               | 883               | <b><u>235</u></b> | <b><u>881</u></b>  |         |       | 128    | 234               | 883               | <b><u>235</u></b> | <b><u>881</u></b>  |         |       |
| 520.omnetpp_r   | 128    | 450               | 373               | <b><u>450</u></b> | <b><u>373</u></b>  |         |       | 128    | 450               | 373               | <b><u>450</u></b> | <b><u>373</u></b>  |         |       |
| 523.xalancbmk_r | 128    | 132               | 1030              | <b><u>132</u></b> | <b><u>1030</u></b> |         |       | 128    | 132               | 1030              | <b><u>132</u></b> | <b><u>1030</u></b> |         |       |
| 525.x264_r      | 128    | 205               | 1090              | <b><u>205</u></b> | <b><u>1090</u></b> |         |       | 128    | 195               | 1150              | <b><u>195</u></b> | <b><u>1150</u></b> |         |       |
| 531.deepsjeng_r | 128    | 363               | 404               | <b><u>364</u></b> | <b><u>403</u></b>  |         |       | 128    | 363               | 404               | <b><u>364</u></b> | <b><u>403</u></b>  |         |       |
| 541.leela_r     | 128    | <b><u>545</u></b> | <b><u>389</u></b> | 545               | 389                |         |       | 128    | <b><u>545</u></b> | <b><u>389</u></b> | 545               | 389                |         |       |
| 548.exchange2_r | 128    | 278               | 1210              | <b><u>279</u></b> | <b><u>1200</u></b> |         |       | 128    | 278               | 1210              | <b><u>279</u></b> | <b><u>1200</u></b> |         |       |
| 557.xz_r        | 128    | 515               | 268               | <b><u>517</u></b> | <b><u>268</u></b>  |         |       | 128    | 515               | 268               | <b><u>517</u></b> | <b><u>268</u></b>  |         |       |

SPECrate®2017\_int\_base = 566

SPECrate®2017\_int\_peak = 585

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/ia32:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-32"
MALLOCONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 566

PowerEdge XE8640 (Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_peak = 585

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
 memory using Red Hat Enterprise Linux 8.4  
 Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
`sync; echo 3> /proc/sys/vm/drop_caches`  
 runcpu command invoked through numactl i.e.:  
`numactl --interleave=all runcpu <etc>`  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```

      ADDDC Setting : Disabled
      DIMM Self Healing on
      Uncorrectable Memory Error : Disabled
      Virtualization Technology : Disabled
      DCU Streamer Prefetcher : Disabled
      Sub NUMA Cluster : 2-way Clustering
      LLC Prefetch : Disabled
      Dead Line LLC Alloc : Disabled

      System Profile : Custom
      CPU Power Management : Maximum Performance
      C1E : Disabled
      C States : Autonomous
      Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
      PCI ASPM L1 Link
      Power Management : Disabled
  
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on localhost Thu Jun 8 02:26:03 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 566

PowerEdge XE8640 (Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_peak = 585

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.19-default #1 SMP PREEMPT_DYNAMIC Wed Apr 20 08:32:52 UTC 2022 (d6fb753/lp)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
02:26:03 up 7 min, 2 users, load average: 0.18, 0.16, 0.10
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      :        :             02:19   ?xdm?  2:20   0.02s gdm-session-worker [pam/gdm-autologin]
root      :0       :             02:19   ?xdm?  2:20   0.02s /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4126009
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126009
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
/usr/lib/systemd/systemd --user
/usr/lib/gnome-terminal-server
bash
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 566

PowerEdge XE8640 (Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_peak = 585

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

```

/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.5 --output_format csv,html,pdf,txt
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.5 --output_format csv,html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2
--define DL-VERS=v4.5 --output_format csv,html,pdf,txt intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
--define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define
DL-BIOS-SNC=2 --define DL-VERS=v4.5 --output_format csv,html,pdf,txt --nopower --runmode rate --tune
base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0

```

### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Gold 6448Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2b0004b1
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 32
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 128
On-line CPU(s) list: 0-127
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Gold 6448Y
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
Stepping: 8

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

## SPECrate®2017\_int\_base = 566

## PowerEdge XE8640 (Intel Xeon Gold 6448Y)

## SPECrate®2017\_int\_peak = 585

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Jun-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

BogoMIPS:          4200.00
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                  clflush dts acpi mmx fxsr sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                  lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                  nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                  ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                  x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                  abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                  cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
                  avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                  avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                  xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                  cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                  arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                  vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                  bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                  tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
L1d cache:        3 MiB (64 instances)
L1i cache:        2 MiB (64 instances)
L2 cache:         128 MiB (64 instances)
L3 cache:         120 MiB (2 instances)
NUMA node(s):     4
NUMA node0 CPU(s): 0,4,8,12,16,20,22,26,32,36,40,44,48,52,56,60,64,68,72,76,80,84,86,90,96,10
                  0,104,108,112,116,120,124
NUMA node1 CPU(s): 2,6,10,14,18,24,28,30,34,38,42,46,50,54,58,62,66,70,74,78,82,88,92,94,98,1
                  02,106,110,114,118,122,126
NUMA node2 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,43,47,51,55,59,65,69,73,77,81,85,89,93,97,10
                  1,105,107,111,115,119,123
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,45,49,53,57,61,63,67,71,75,79,83,87,91,95,99,1
                  03,109,113,117,121,125,127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:  Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 3M       | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 2M       | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 2M       | 128M     | 16   | Unified     | 2     | 2048  | 1        | 64             |
| L3   | 60M      | 120M     | 15   | Unified     | 3     | 65536 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus:
0,4,8,12,16,20,22,26,32,36,40,44,48,52,56,60,64,68,72,76,80,84,86,90,96,100,104,108,112,116,120,124
node 0 size: 257492 MB
node 0 free: 247307 MB
node 1 cpus:
2,6,10,14,18,24,28,30,34,38,42,46,50,54,58,62,66,70,74,78,82,88,92,94,98,102,106,110,114,118,122,126
node 1 size: 258039 MB
node 1 free: 257614 MB
node 2 cpus:

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 566

## PowerEdge XE8640 (Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_peak = 585

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Jun-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

1, 5, 9, 13, 17, 21, 25, 29, 33, 37, 41, 43, 47, 51, 55, 59, 65, 69, 73, 77, 81, 85, 89, 93, 97, 101, 105, 107, 111, 115, 119, 123
node 2 size: 258039 MB
node 2 free: 257090 MB
node 3 cpus:
3, 7, 11, 15, 19, 23, 27, 31, 35, 39, 45, 49, 53, 57, 61, 63, 67, 71, 75, 79, 83, 87, 91, 95, 99, 103, 109, 113, 117, 121, 125, 127
node 3 size: 257958 MB
node 3 free: 257533 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

```

9. /proc/meminfo
MemTotal:      1056287120 kB

```

```

10. who -r
run-level 5 Jun 8 02:20

```

```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
graphical      running

```

```

12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor auditd avahi-daemon bluetooth
cron display-manager firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings
klog libvirtd lvm2-monitor nscd nvme-fc-boot-connections oracle postfix purge-kernels
rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny wpa_supplicant xencommons
enabled-runtime systemd-remount-fs
disabled      NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis
apache2 apache2@ appstream-sync-cache autofs autoyast-initscripts avahi-dnsmasq bgpd
blk-availability bluetooth-mesh boot-sysctl booth-arbitrator booth@ ca-certificates
chrony-wait chronyd clamav-milter clamd cloud-config cloud-final cloud-init
cloud-init-local console-getty containerbuild-regionsrv corosync corosync-notifyd crm_mon
cryptctl-client cryptctl-server ctdb cups cups-browsed ddclient debug-shell dhcpd dhcpd6
dhcrelay dhcrelay6 dirsrv@ dlm dmraid-activation dnsmasq docker-img-store-setup
docker-img-store-setup-xfs drbd drbd-lvchange@ drbd-wait-promotable@ ebttables
exchange-bmc-os-info fetchmail freshclam google-guest-agent google-shutdown-scripts
google-startup-scripts gpm grub2-once guestregister haveged-switch-root hawk
hwloc-dump-hwdata ipmi ipmievd ipvsadm iscsi-init iscsid iscsiuiio isid issue-add-ssh-keys
kdump kdump-early kexec-load ksm kvm_stat ldirectord libvirt-guests logd lunmask lvmlockd
lvmlocks man-db-create mariadb mariadb@ multipathd munge named nfs nfs-blkmap nfs-server
nfsserver nm-cloud-setup nmb ntp-wait ntpd nvmlf-autoconnect openvpn@ ospf6d ospfd
ostree-remount pacemaker pppoe pppoe-server racoon racoon-setkey radvd rarpd@ rdisc ripd
ripngd rootgrow rpcbind rpmconfigcheck rsyncd rtkit-daemon salt-minion sapconf saprouter
saptune sbd sbd_remote serial-getty@ slurmd slurmdbd smartd_generate_opts smb
snmpd snmptrapd spamd spamd speech-dispatcherd squid srp_daemon srp_daemon_port@
strongswan strongswan-starter svnserv sysstat systemd-boot-check-no-failures
systemd-network-generator systemd-nspawn@ systemd-sysextd systemd-time-wait-sync
systemd-timesyncd tcsd tuned udisks2 upower virtinterfaced virtnetworkd virtnodeudev
virtnwfilterd virtproxyd virtqemud virtsecret virtstoraged virtxend vsftpd waagent
winbind wpa_supplicant@ xen-dom0-modules xen-init-dom0 xen-qemu-dom0-disk-backend
xen-watchdog xenconsoled xendomains xenstored xrdp xrdp-sesman ypbind zebra

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 566

PowerEdge XE8640 (Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_peak = 585

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

indirect pcsd saned@ uidd virtlockd virtlogd wickedd

### 13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.19-default
root=UUID=5dbfa664-5ba7-440a-b916-2ff8d67469f6
splash=silent
mitigations=auto
quiet
security=apparmor
```

### 14. cpupower frequency-info

```
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

### 15. tuned-adm active

No current active profile.

### 16. sysctl

```
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 20
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0
```

### 17. /sys/kernel/mm/transparent\_hugepage

```
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

### 18. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 566

PowerEdge XE8640 (Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_peak = 585

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

scan\_sleep\_millisecs 10000

### 19. OS release

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP4

### 20. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 80G 4.2G 76G 6% /mnt/ramdisk

### 21. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.  
Product: PowerEdge XE8640  
Product Family: PowerEdge  
Serial: 1234567

### 22. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x 00AD063200AD HMC94MEBRA109N 64 GB 2 rank 4800

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.2.1  
BIOS Date: 05/17/2023  
BIOS Revision: 1.2

## Compiler Version Notes

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 566

PowerEdge XE8640 (Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_peak = 585

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 548.exchange2\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 566

PowerEdge XE8640 (Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_peak = 585

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Base Portability Flags (Continued)

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 566

PowerEdge XE8640 (Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_peak = 585

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Peak Portability Flags (Continued)

```
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 566

PowerEdge XE8640 (Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_peak = 585

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-07 14:26:02-0400.

Report generated on 2024-01-29 18:01:26 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-15.