



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
NF5280M7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 1030  
SPECrate®2017\_int\_peak = 1070

CPU2017 License: 3358


Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

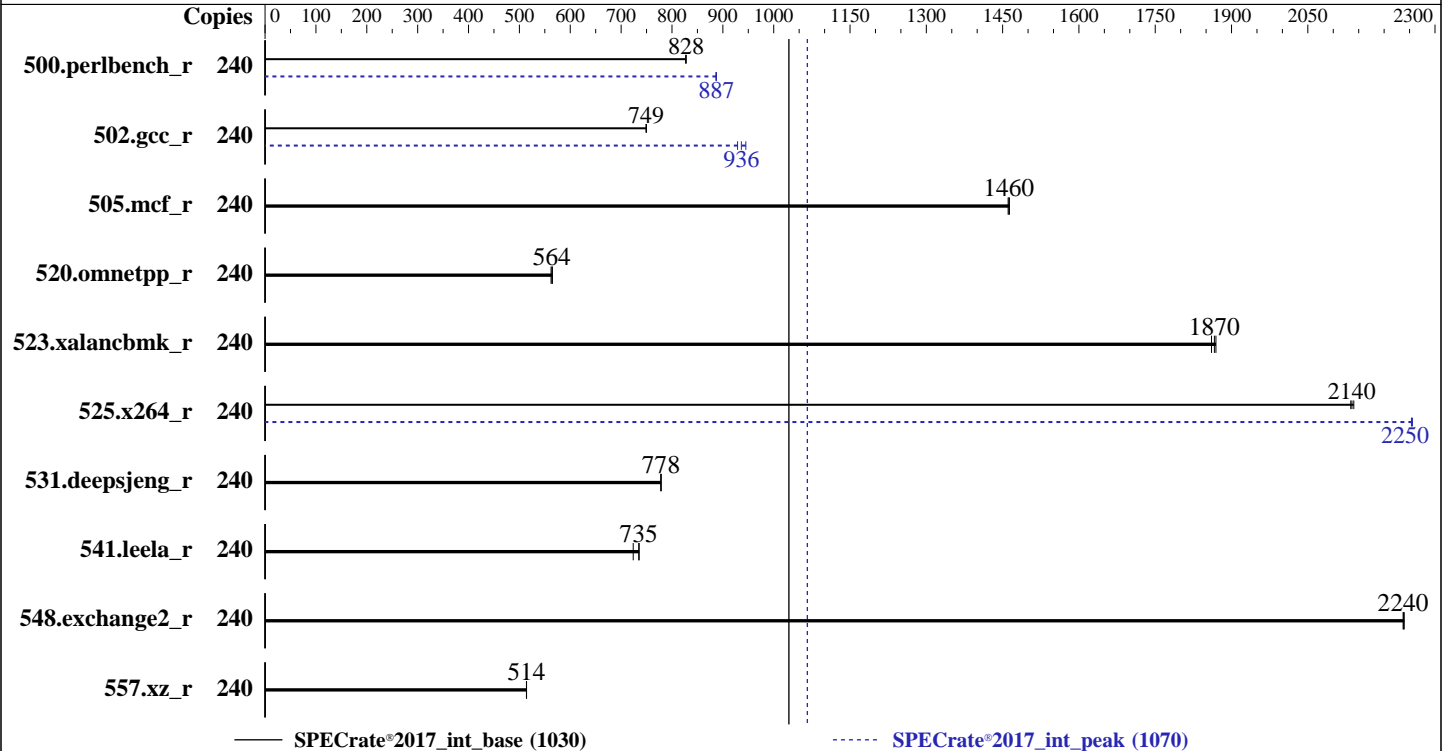

## Hardware

CPU Name: Intel Xeon Platinum 8490H  
 Max MHz: 3500  
 Nominal: 1900  
 Enabled: 120 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 112.5 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 1 TB NVME SSD  
 Other: None

## Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 03.01.00 released Dec-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
NF5280M7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 1030  
SPECrate®2017\_int\_peak = 1070

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	240	462	828	<b>462</b>	<b>828</b>	462	827	240	431	886	<b>431</b>	<b>887</b>	431	887
502.gcc_r	240	<b>454</b>	<b>749</b>	454	749	453	750	240	<b>363</b>	<b>936</b>	360	945	366	929
505.mcf_r	240	265	1460	265	1460	<b>265</b>	<b>1460</b>	240	265	1460	265	1460	<b>265</b>	<b>1460</b>
520.omnetpp_r	240	560	562	557	565	<b>558</b>	<b>564</b>	240	560	562	557	565	<b>558</b>	<b>564</b>
523.xalancbmk_r	240	136	1870	<b>136</b>	<b>1870</b>	136	1860	240	136	1870	<b>136</b>	<b>1870</b>	136	1860
525.x264_r	240	<b>197</b>	<b>2140</b>	196	2140	197	2130	240	186	2250	186	2260	<b>186</b>	<b>2250</b>
531.deepsjeng_r	240	<b>353</b>	<b>778</b>	353	778	353	778	240	<b>353</b>	<b>778</b>	353	778	353	778
541.leela_r	240	549	724	<b>541</b>	<b>735</b>	540	736	240	549	724	<b>541</b>	<b>735</b>	540	736
548.exchange2_r	240	281	2240	<b>281</b>	<b>2240</b>	281	2240	240	281	2240	<b>281</b>	<b>2240</b>	281	2240
557.xz_r	240	504	514	<b>504</b>	<b>514</b>	504	514	240	504	514	<b>504</b>	<b>514</b>	504	514

SPECrate®2017\_int\_base = **1030**

SPECrate®2017\_int\_peak = **1070**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/lib/ia32:/home/CPU2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
NF5280M7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 1030

SPECrate®2017\_int\_peak = 1070

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd.

**Tested by:** Inspur Electronic Information Industry Co., Ltd.

**Test Date:** Aug-2023

**Hardware Availability:** Apr-2023

**Software Availability:** Dec-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
ENERGY\_PERF\_BIAS\_CFG mode set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable  
Sub NUMA Cluster (SNC) set to SNC4

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Tue Aug 8 04:55:32 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
NF5280M7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 1030

SPECrate®2017\_int\_peak = 1070

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
04:55:32 up 17:05, 1 user, load average: 0.00, 0.00, 0.00
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root     tty1     Mon11   11.00s  1.09s  0.01s  sh
reportable-ic2023.0-lin-sapphirerapids-rate-smt-on-20221201.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062161
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062161
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
login -- root
-bash
sh reportable-ic2023.0-lin-sapphirerapids-rate-smt-on-20221201.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=120 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=120 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.023/temlogs/preenv.intrate.023.0.log --lognum 023.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id      : GenuineIntel
cpu family     : 6
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
NF5280M7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 1030

SPECrate®2017\_int\_peak = 1070

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```

model          : 143
stepping       : 6
microcode      : 0x2b000130
bugs           : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores      : 60
siblings       : 120
2 physical ids (chips)
240 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 0: apicids 0-119
physical id 1: apicids 128-247

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                240
On-line CPU(s) list:  0-239
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Platinum 8490H
BIOS Model name:      Intel(R) Xeon(R) Platinum 8490H
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   60
Socket(s):             2
Stepping:              6
CPU max MHz:           3500.0000
CPU min MHz:           800.0000
BogoMIPS:              3800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                      intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                      tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                      rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                      cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                      wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
                      avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                      avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                      cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                      arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
L1d cache:            5.6 MiB (120 instances)
L1i cache:            3.8 MiB (120 instances)
L2 cache:             240 MiB (120 instances)
L3 cache:             225 MiB (2 instances)
NUMA node(s):         8

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
NF5280M7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 1030  
SPECrate®2017\_int\_peak = 1070

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```

NUMA node0 CPU(s):      0-14,120-134
NUMA node1 CPU(s):      15-29,135-149
NUMA node2 CPU(s):      30-44,150-164
NUMA node3 CPU(s):      45-59,165-179
NUMA node4 CPU(s):      60-74,180-194
NUMA node5 CPU(s):      75-89,195-209
NUMA node6 CPU(s):      90-104,210-224
NUMA node7 CPU(s):      105-119,225-239
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.6M	12	Data	1	64	1	64
L1i	32K	3.8M	8	Instruction	1	64	1	64
L2	2M	240M	16	Unified	2	2048	1	64
L3	112.5M	225M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-14,120-134
node 0 size: 64097 MB
node 0 free: 52722 MB
node 1 cpus: 15-29,135-149
node 1 size: 64505 MB
node 1 free: 58086 MB
node 2 cpus: 30-44,150-164
node 2 size: 64505 MB
node 2 free: 50287 MB
node 3 cpus: 45-59,165-179
node 3 size: 64505 MB
node 3 free: 58184 MB
node 4 cpus: 60-74,180-194
node 4 size: 64505 MB
node 4 free: 54794 MB
node 5 cpus: 75-89,195-209
node 5 size: 64505 MB
node 5 free: 58229 MB
node 6 cpus: 90-104,210-224
node 6 size: 64505 MB
node 6 free: 58210 MB
node 7 cpus: 105-119,225-239
node 7 size: 64449 MB
node 7 free: 58179 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
NF5280M7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 1030  
SPECrate®2017\_int\_peak = 1070

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd.  
**Tested by:** Inspur Electronic Information Industry Co., Ltd.

**Test Date:** Aug-2023  
**Hardware Availability:** Apr-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
5: 21 21 21 21 12 10 12 12
6: 21 21 21 21 12 12 10 12
7: 21 21 21 21 12 12 12 10
```

```
-----
9. /proc/meminfo
MemTotal:      527954316 kB
```

```
-----
10. who -r
run-level 3 Aug 7 11:52
```

```
-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
multi-user      running
```

```
-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
                systemd-network-generator udisks2 upower
enabled-runtime systemd-remount-fs
disabled       blk-availability canberra-system-bootup canberra-system-shutdown
                canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell kvm_stat
                man-db-restart-cache-update nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@
                sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel00-root
ro
resume=/dev/mapper/rhel00-swap
rd.lvm.lv=rhel00/root
rd.lvm.lv=rhel00/swap
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.50 GHz.
                The governor "performance" may decide which speed to use
                within this range.
boost state support:
Supported: yes
Active: yes
```

```
-----
15. sysctl
kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes              0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio              20
```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
NF5280M7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 1030

SPECrate®2017\_int\_peak = 1070

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```

vm.dirty_writeback_centisecs      500
vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold              500
vm.min_unmapped_ratio            1
vm.nr_hugepages                   0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     60
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode             0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

```

-----
19. Disk information
SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel100-home xfs  819G  225G  595G  28% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      IEI
Product:     NF5280M7
Product Family: Not specified
Serial:      000000000

```

```

-----
21. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
NF5280M7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 1030

SPECrate®2017\_int\_peak = 1070

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 03.01.00  
BIOS Date: 12/29/2022

## Compiler Version Notes

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbnk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 548.exchange2\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
NF5280M7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 1030

SPECrate®2017\_int\_peak = 1070

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd.

**Tested by:** Inspur Electronic Information Industry Co., Ltd.

**Test Date:** Aug-2023

**Hardware Availability:** Apr-2023

**Software Availability:** Dec-2022

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
NF5280M7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 1030

SPECrate®2017\_int\_peak = 1070

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
NF5280M7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 1030

SPECrate®2017\_int\_peak = 1070

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallocc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-08 04:55:31-0400.

Report generated on 2024-01-29 18:05:54 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-29.