



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Nettrix**

R620 G50 (Intel Xeon Max 9480, 1.9 GHz)

CPU2017 License: 6138


Test Sponsor: Nettrix

Tested by: Nettrix

Test Date: Jul-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

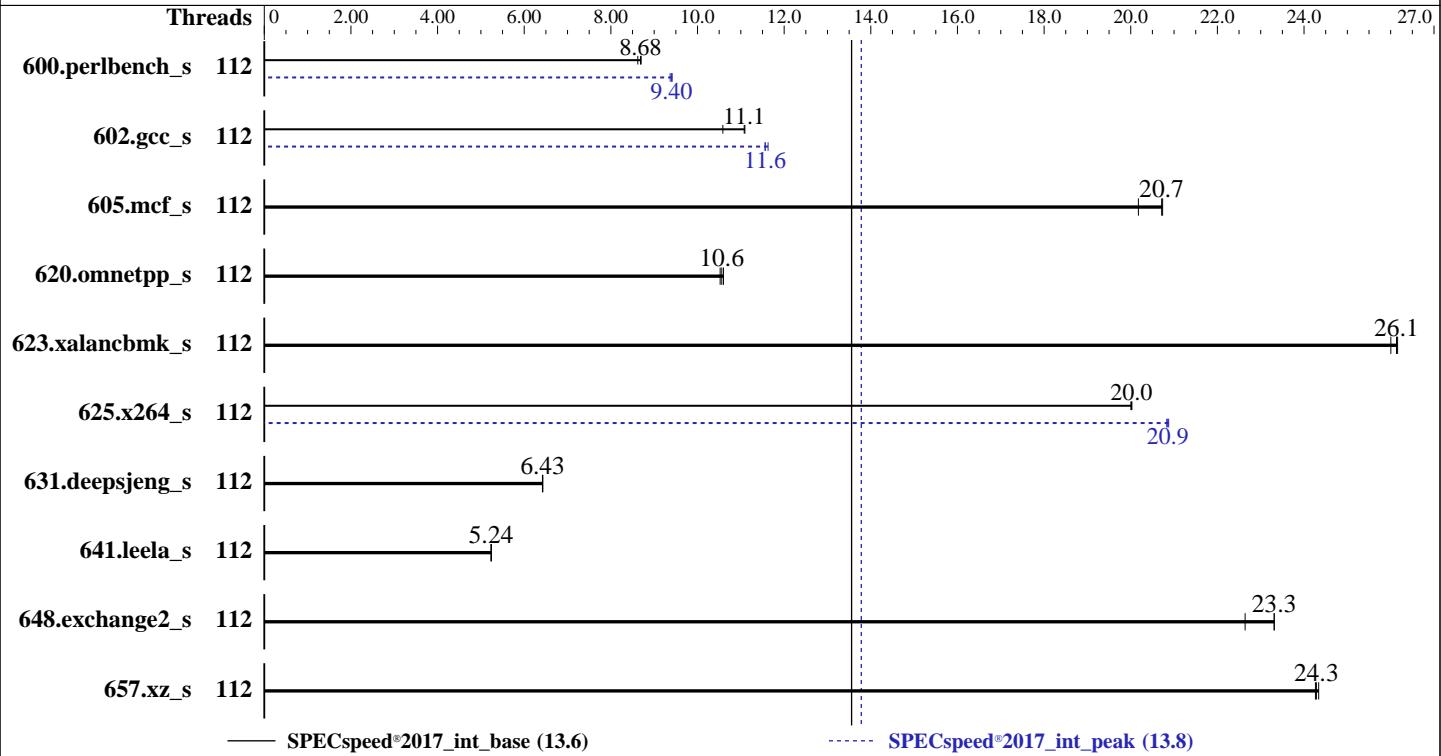

Hardware		Software	
CPU Name:	Intel Xeon Max 9480	OS:	SUSE Linux Enterprise Server 15 SP4
Max MHz:	3500	Compiler:	5.14.21-150400.22-default
Nominal:	1900	Parallel:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Enabled:	112 cores, 2 chips	Firmware:	Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Orderable:	1,2 chips	File System:	Yes
Cache L1:	32 KB I + 48 KB D on chip per core	System State:	Nettrix BIOS Version NNH1041020 released Jan-2023
L2:	2 MB I+D on chip per core	Base Pointers:	xfs
L3:	112.5 MB I+D on chip per chip	Peak Pointers:	Run level 3 (multi-user)
Other:	None	Other:	64-bit
Memory:	1152 GB (16 x 64 GB 2Rx4 PC5-4800B-R + 2 x 64 GB HBM)	Power Management:	64-bit
Storage:	1 x 480 GB SATA SSD	jemalloc memory allocator V5.0.1	
Other:	None	BIOS set to prefer performance at the cost of additional power usage	



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Nettrix**

R620 G50 (Intel Xeon Max 9480, 1.9 GHz)

**SPECspeed®2017\_int\_base = 13.6**

**SPECspeed®2017\_int\_peak = 13.8**

CPU2017 License: 6138

Test Date: Jul-2023

Test Sponsor: Nettrix

Hardware Availability: Feb-2023

Tested by: Nettrix

Software Availability: Dec-2022

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	112	206	8.62	204	8.70	<b>204</b>	<b>8.68</b>	112	189	9.37	<b>189</b>	<b>9.40</b>	189	9.41		
602.gcc_s	112	376	10.6	<b>359</b>	<b>11.1</b>	359	11.1	112	342	11.6	<b>344</b>	<b>11.6</b>	344	11.6		
605.mcf_s	112	234	20.2	<b>228</b>	<b>20.7</b>	228	20.7	112	234	20.2	<b>228</b>	<b>20.7</b>	228	20.7		
620.omnetpp_s	112	<b>154</b>	<b>10.6</b>	154	10.6	155	10.5	112	<b>154</b>	<b>10.6</b>	154	10.6	155	10.5		
623.xalancbmk_s	112	54.2	26.2	54.5	26.0	<b>54.2</b>	<b>26.1</b>	112	54.2	26.2	54.5	26.0	<b>54.2</b>	<b>26.1</b>		
625.x264_s	112	88.2	20.0	<b>88.1</b>	<b>20.0</b>	88.1	20.0	112	84.7	20.8	<b>84.6</b>	<b>20.9</b>	84.5	20.9		
631.deepsjeng_s	112	223	6.43	223	6.42	<b>223</b>	<b>6.43</b>	112	223	6.43	223	6.42	<b>223</b>	<b>6.43</b>		
641.leela_s	112	<b>326</b>	<b>5.24</b>	326	5.24	326	5.24	112	<b>326</b>	<b>5.24</b>	326	5.24	<b>326</b>	<b>5.24</b>		
648.exchange2_s	112	<b>126</b>	<b>23.3</b>	126	23.3	130	22.6	112	<b>126</b>	<b>23.3</b>	126	23.3	<b>130</b>	22.6		
657.xz_s	112	<b>255</b>	<b>24.3</b>	254	24.3	255	24.3	112	<b>255</b>	<b>24.3</b>	254	24.3	<b>255</b>	24.3		
SPECspeed®2017_int_base = 13.6				SPECspeed®2017_int_peak = 13.8												

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/SPECcpu2017\_ic2023/lib/intel64:/home/SPECcpu2017\_ic2023/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_int\_base = 13.6

R620 G50 (Intel Xeon Max 9480, 1.9 GHz)

SPECspeed®2017\_int\_peak = 13.8

CPU2017 License: 6138

Test Date: Jul-2023

Test Sponsor: Nettrix

Hardware Availability: Feb-2023

Tested by: Nettrix

Software Availability: Dec-2022

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
```

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

## Platform Notes

BIOS Configuration:

```
Enable LP [Global] set to Single LP
LLC Prefetch set to Enabled
SNC (Sub NUMA) set to Disabled
Patrol Scrub set to Disabled
LLC dead line alloc set to Disabled
XPT Prefetch set to Enabled
KTI Prefetch set to Auto
SR-IOV Support set to Disabled
Energy Efficient Turbo set to Disabled
```

Sysinfo program /home/SPECcpu2017\_ic2023/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Sat Jul 22 08:32:27 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  12. Failed units, from systemctl list-units --state=failed
  13. Services, from systemctl list-unit-files
  14. Linux kernel boot-time arguments, from /proc/cmdline
  15. cpupower frequency-info
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 (Intel Xeon Max 9480, 1.9 GHz)

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.8

CPU2017 License: 6138

Test Date: Jul-2023

Test Sponsor: Nettrix

Hardware Availability: Feb-2023

Tested by: Nettrix

Software Availability: Dec-2022

## Platform Notes (Continued)

```
-----  
1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86_64 x86_64 x86_64 GNU/Linux  
  
-----  
2. w  
08:32:27 up 14:47, 0 users, load average: 0.04, 2.25, 2.67  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
  
-----  
3. Username  
From environment variable $USER: root  
  
-----  
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 4126683  
max locked memory       (kbytes, -l) 64  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority      (-r) 0  
stack size              (kbytes, -s) unlimited  
cpu time                (seconds, -t) unlimited  
max user processes       (-u) 4126683  
virtual memory           (kbytes, -v) unlimited  
file locks               (-x) unlimited  
  
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 29  
sh run_speed.sh  
runcpu --nobuild --action validate --define default-platform-flags -c  
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=112 --tune base,peak -o all --define  
intspeedaffinity --define drop_caches intspeed  
runcpu --nobuild --action validate --define default-platform-flags --configfile  
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=112 --tune base,peak --output_format all  
--define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed  
intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.043/templogs/preenv.intspeed.043.0.log  
--lognum 043.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/SPECcpu2017_ic2023  
  
-----  
6. /proc/cpuinfo  
model name      : Intel (R) Xeon (R) CPU Max 9480  
vendor_id       : GenuineIntel  
cpu family     : 6  
model          : 143  
stepping        : 8  
microcode      : 0x2c000120  
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs  
cpu cores      : 56  
siblings        : 56  
2 physical ids (chips)
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Nettrix

### R620 G50 (Intel Xeon Max 9480, 1.9 GHz)

CPU2017 License: 6138

Test Sponsor: Nettrix

Tested by: Nettrix

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.8

Test Date: Jul-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```
112 processors (hardware threads)
physical id 0: core ids 0-55
physical id 1: core ids 0-55
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 112
On-line CPU(s) list: 0-111
Vendor ID: GenuineIntel
Model name: Intel (R) Xeon (R) CPU Max 9480
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 56
Socket(s): 2
Stepping: 8
Frequency boost: enabled
CPU max MHz: 1901.0000
CPU min MHz: 800.0000
BogoMIPS: 3800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
nonstop_tsc cpuid aperfmpfreq tsc_knwn_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospte waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization: VT-x
L1d cache: 5.3 MiB (112 instances)
L1i cache: 3.5 MiB (112 instances)
L2 cache: 224 MiB (112 instances)
L3 cache: 225 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-55
NUMA node1 CPU(s): 56-111
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_int\_base = 13.6

R620 G50 (Intel Xeon Max 9480, 1.9 GHz)

SPECspeed®2017\_int\_peak = 13.8

CPU2017 License: 6138

Test Date: Jul-2023

Test Sponsor: Nettrix

Hardware Availability: Feb-2023

Tested by: Nettrix

Software Availability: Dec-2022

## Platform Notes (Continued)

Vulnerability Itlb multihit:	Not affected
Vulnerability Llft:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	112.5M	225M	15	Unified	3	122880	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0-55  
node 0 size: 515675 MB  
node 0 free: 514588 MB  
node 1 cpus: 56-111  
node 1 size: 516018 MB  
node 1 free: 515103 MB  
node distances:  
node 0 1  
0: 10 26  
1: 26 10

-----  
9. /proc/meminfo

MemTotal: 1056454440 kB

-----  
10. who -r  
run-level 3 Jul 21 17:45

-----  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user degraded

-----  
12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

-----  
13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled apparmor auditd chronyd cron getty@ haveged irqbalance issue-generator iuvolt kbdsettings postfix purge-kernels rollback sep5 sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled boot-sysctl ca-certificates chrony-wait console-getty debug-shell exchange-bmc-os-info grub2-once haveged-switch-root ipmievd issue-add-ssh-keys kexec-load lunmask munge nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ slurmd smartd

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 (Intel Xeon Max 9480, 1.9 GHz)

CPU2017 License: 6138

Test Sponsor: Nettrix

Tested by: Nettrix

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.8

Test Date: Jul-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```
smartd_generate_opts srp_daemon srp_daemon_port@ systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd yppbind
indirect wicd
-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=3e42e6f0-0a08-4b20-8347-f1472220dfdb
splash=silent
mitigations=auto
quiet
-----
15. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 1.90 GHz.
                    The governor "ondemand" may decide which speed to use
                    within this range.
    boost state support:
        Supported: yes
        Active: yes
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0
-----
17. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag             1
max_ptes_none      511
max_ptes_shared    256
max_ptes_swap      64
pages_to_scan      4096
scan_sleep_millisecs 10000
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 (Intel Xeon Max 9480, 1.9 GHz)

CPU2017 License: 6138

Test Sponsor: Nettrix

Tested by: Nettrix

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.8

Test Date: Jul-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

19. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP4

20. Disk information  
SPEC is set to: /home/SPECcpu2017\_ic2023  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda3 xfs 413G 224G 190G 55% /home

21. /sys/devices/virtual/dmi/id  
Vendor: Nettrix  
Product: R620 G50  
Product Family: Rack  
Serial: 6101810603447812

22. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
8x Hynix HMCG94MEBQA121N 64 GB 2 rank 4800  
8x Hynix HMCG94MEBQA123N 64 GB 2 rank 4800  
8x Intel 16 GB 1 rank 3200

23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: NNH1041020  
BIOS Date: 01/09/2023  
BIOS Revision: 5.29

Each Intel Xeon CPU Max processor is configured with 64 GB of High Bandwidth Memory (HBM) in-package. dmidecode is additionally reporting the capacity of the CPU in-package HBM stack as: '8x Intel 16 GB 1 rank 3200'

## Compiler Version Notes

=====

C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 (Intel Xeon Max 9480, 1.9 GHz)

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.8

CPU2017 License: 6138

Test Date: Jul-2023

Test Sponsor: Nettrix

Hardware Availability: Feb-2023

Tested by: Nettrix

Software Availability: Dec-2022

## Compiler Version Notes (Continued)

=====  
Fortran | 648.exchange2\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

602.gcc\_S: -DSPEC\_LP64

605.mcf\_S: -DSPEC\_LP64

620.omnetpp\_s: -DSPEC\_LP64

623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX

625.x264\_s: -DSPEC\_LP64

631.deepsjeng\_s: -DSPEC\_LP64

641.leela\_s: -DSPEC\_LP64

648.exchange2\_s: -DSPEC\_LP64

657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fno-math-errno  
-mfpmath=sse -funroll-loops -fopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-fno-math-errno -mfpmath=sse -funroll-loops -fopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_int\_base = 13.6

R620 G50 (Intel Xeon Max 9480, 1.9 GHz)

SPECspeed®2017\_int\_peak = 13.8

CPU2017 License: 6138

Test Date: Jul-2023

Test Sponsor: Nettrix

Hardware Availability: Feb-2023

Tested by: Nettrix

Software Availability: Dec-2022

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 (Intel Xeon Max 9480, 1.9 GHz)

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.8

CPU2017 License: 6138

Test Date: Jul-2023

Test Sponsor: Nettrix

Hardware Availability: Feb-2023

Tested by: Nettrix

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

605.mcf\_s: basepeak = yes

625.x264\_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3  
-ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC\_OPENMP  
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-21 20:32:27-0400.

Report generated on 2024-01-29 18:06:14 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-29.