



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.55 GHz, AMD EPYC 9184X)

SPECSpeed®2017_int_base = 16.1

SPECSpeed®2017_int_peak = 16.4

CPU2017 License: 9017


Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

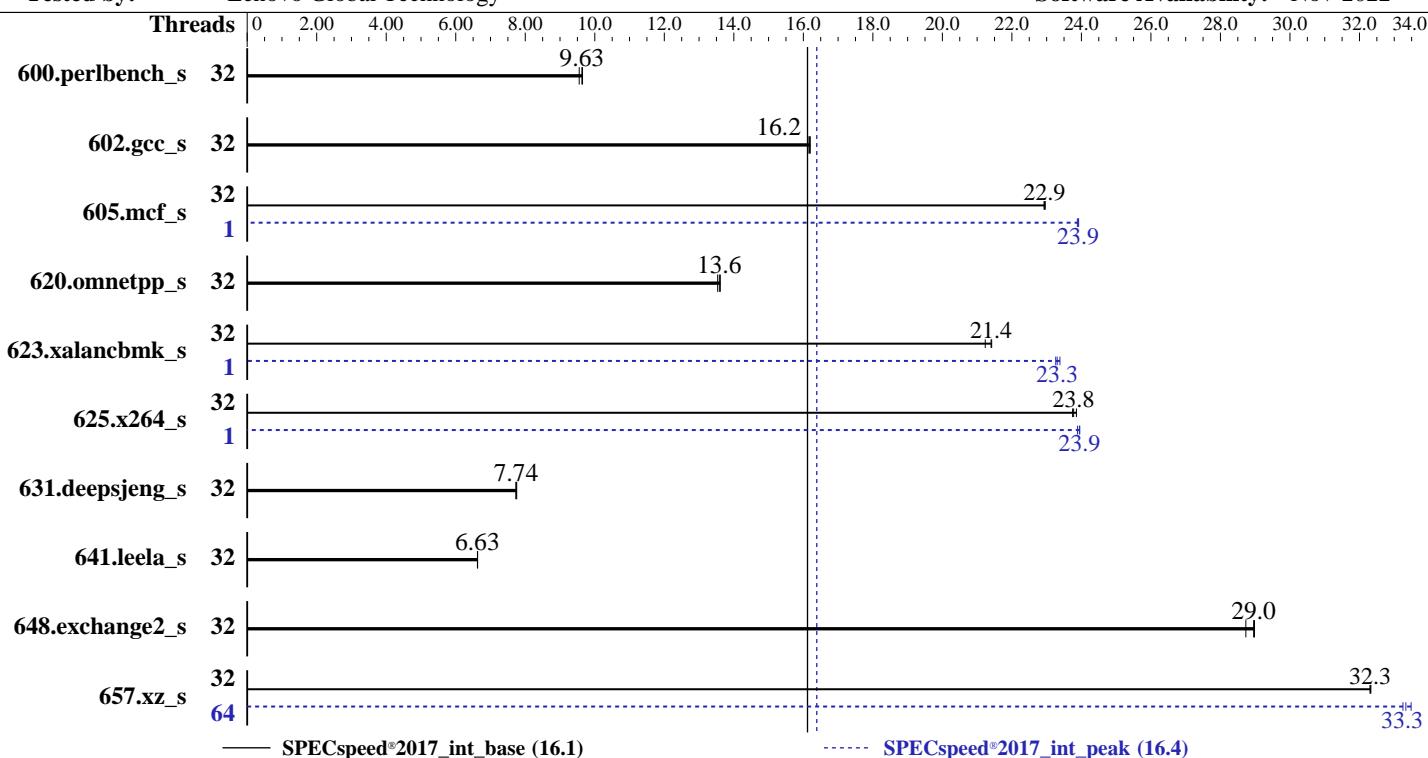

— SPECSpeed®2017_int_base (16.1)

----- SPECSpeed®2017_int_peak (16.4)

Hardware

CPU Name: AMD EPYC 9184X
Max MHz: 4200
Nominal: 3550
Enabled: 32 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 768 MB I+D on chip per chip,
96 MB shared / 2 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 480 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
Kernel 5.14.21-150400.22-default
Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
Parallel: Yes
Firmware: Lenovo BIOS Version KAE115K 3.10 released Oct-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.55 GHz, AMD EPYC 9184X)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	184	9.65	<u>184</u>	9.63	186	9.55	32	184	9.65	<u>184</u>	9.63	186	9.55		
602.gcc_s	32	246	16.2	246	16.2	246	16.2	32	246	16.2	246	16.2	246	16.2		
605.mcf_s	32	206	22.9	206	23.0	<u>206</u>	22.9	1	197	23.9	198	23.9	<u>197</u>	23.9		
620.omnetpp_s	32	121	13.5	<u>120</u>	13.6	120	13.6	32	121	13.5	<u>120</u>	13.6	120	13.6		
623.xalancbmk_s	32	66.7	21.2	66.2	21.4	<u>66.2</u>	21.4	1	60.6	23.4	<u>60.8</u>	23.3	60.9	23.3		
625.x264_s	32	74.2	23.8	74.3	23.7	73.9	23.9	1	73.6	24.0	<u>73.7</u>	23.9	73.8	23.9		
631.deepsjeng_s	32	185	7.73	<u>185</u>	7.74	185	7.75	32	185	7.73	<u>185</u>	7.74	185	7.75		
641.leela_s	32	258	6.62	257	6.63	<u>257</u>	6.63	32	258	6.62	257	6.63	<u>257</u>	6.63		
648.exchange2_s	32	101	29.0	<u>102</u>	29.0	102	28.7	32	101	29.0	<u>102</u>	29.0	102	28.7		
657.xz_s	32	191	32.3	<u>191</u>	32.3	191	32.3	64	<u>185</u>	33.3	185	33.5	186	33.3		
SPECspeed®2017_int_base = 16.1								SPECspeed®2017_int_peak = 16.4								

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.55 GHz, AMD EPYC 9184X)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-63"  
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/amd_speed_aocc400_znver4_A_lib/lib:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "64"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

```
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Operating Mode set to Maximum Performance and then set it to Custom Mode

NUMA Nodes per Socket set to NPS4

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Sat Nov 25 02:36:38 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.55 GHz, AMD EPYC 9184X)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

```
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
-----
2. w
02:36:38 up 3 min, 1 user, load average: 0.23, 0.27, 0.12
USER      TTY      FROM          LOGIN@    IDLE     JCPU     PCPU WHAT
root      ttys1          -          02:35   12.00s  0.96s  0.07s /bin/bash ./amd_speed_aocc400_znver4_A1.sh
-----
3. Username
From environment variable $USER: root
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals           (-i) 3094777
max locked memory         (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 3094777
virtual memory             (kbytes, -v) unlimited
file locks                  (-x) unlimited
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./run_SR645V3_bergamo.sh
/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.55 GHz, AMD EPYC 9184X)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

```
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.196/templogs/preenv.intspeed.196.0.log --lognum 196.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2
```

```
-----  
6. /proc/cpuinfo  
model name      : AMD EPYC 9184X 16-Core Processor  
vendor_id       : AuthenticAMD  
cpu family     : 25  
model          : 17  
stepping        : 2  
microcode       : 0xa10123e  
bugs            : sysret_ss_atrs spectre_v1 spectre_v2 spec_store_bypass  
TLB size        : 3584 4K pages  
cpu cores       : 16  
siblings         : 32  
2 physical ids (chips)  
64 processors (hardware threads)  
physical id 0: core ids 0-1,8-9,16-17,24-25,32-33,40-41,48-49,56-57  
physical id 1: core ids 0-1,8-9,16-17,24-25,32-33,40-41,48-49,56-57  
physical id 0: apicids 0-3,16-19,32-35,48-51,64-67,80-83,96-99,112-115  
physical id 1: apicids 128-131,144-147,160-163,176-179,192-195,208-211,224-227,240-243  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.2:  
Architecture:           x86_64  
CPU op-mode(s):        32-bit, 64-bit  
Address sizes:         52 bits physical, 57 bits virtual  
Byte Order:            Little Endian  
CPU(s):                64  
On-line CPU(s) list:  0-63  
Vendor ID:             AuthenticAMD  
Model name:            AMD EPYC 9184X 16-Core Processor  
CPU family:            25  
Model:                 17  
Thread(s) per core:   2  
Core(s) per socket:   16  
Socket(s):            2  
Stepping:              2  
Frequency boost:      enabled  
CPU max MHz:          4208.6909  
CPU min MHz:          1500.0000  
BogoMIPS:              7089.54  
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36  
clflush mmfx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm  
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl  
pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe  
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy  
abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext  
perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13  
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1  
avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap  
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.55 GHz, AMD EPYC 9184X)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

```
xsaverc xgetbvl xsaves cqmm_llc cqmm_occup_llc cqmm_mbm_total cqmm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pkupk vospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
```

Virtualization:

L1d cache:	1 MiB (32 instances)
L1i cache:	1 MiB (32 instances)
L2 cache:	32 MiB (32 instances)
L3 cache:	1.5 GiB (16 instances)

NUMA node(s):

NUMA node0 CPU(s):	0-3,32-35
--------------------	-----------

NUMA node1 CPU(s):	4-7,36-39
--------------------	-----------

NUMA node2 CPU(s):	8-11,40-43
--------------------	------------

NUMA node3 CPU(s):	12-15,44-47
--------------------	-------------

NUMA node4 CPU(s):	16-19,48-51
--------------------	-------------

NUMA node5 CPU(s):	20-23,52-55
--------------------	-------------

NUMA node6 CPU(s):	24-27,56-59
--------------------	-------------

NUMA node7 CPU(s):	28-31,60-63
--------------------	-------------

Vulnerability Itlb multihit: Not affected

Vulnerability Llft: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	96M	1.5G	16	Unified	3	98304	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-3,32-35

node 0 size: 96464 MB

node 0 free: 95508 MB

node 1 cpus: 4-7,36-39

node 1 size: 96765 MB

node 1 free: 96573 MB

node 2 cpus: 8-11,40-43

node 2 size: 96765 MB

node 2 free: 96598 MB

node 3 cpus: 12-15,44-47

node 3 size: 96765 MB

node 3 free: 96551 MB

node 4 cpus: 16-19,48-51

node 4 size: 96765 MB

node 4 free: 96564 MB

node 5 cpus: 20-23,52-55

node 5 size: 96731 MB

node 5 free: 96219 MB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.55 GHz, AMD EPYC 9184X)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

```
node 6 cpus: 24-27,56-59
node 6 size: 96765 MB
node 6 free: 96614 MB
node 7 cpus: 28-31,60-63
node 7 size: 96693 MB
node 7 free: 96519 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 12 12 12 32 32 32 32
 1: 12 10 12 12 32 32 32 32
 2: 12 12 10 12 32 32 32 32
 3: 12 12 12 10 32 32 32 32
 4: 32 32 32 32 10 12 12 12
 5: 32 32 32 32 12 10 12 12
 6: 32 32 32 32 12 12 10 12
 7: 32 32 32 32 12 12 12 10

-----
9. /proc/meminfo
MemTotal: 792287724 kB

-----
10. who -r
run-level 3 Nov 25 02:34

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user running

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog
smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmiev
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc
rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd
generated ntp_sync
indirect wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=3bd1de87-9e70-472e-8edf-b06ab6b3800b
splash=silent
mitigations=auto
quiet
security=apparmor

-----
14. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 3.55 GHz.
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.55 GHz, AMD EPYC 9184X)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer defer+madvise madvise never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release	/etc/*-version
os-release	SUSE Linux Enterprise Server 15 SP4

19. Disk information

SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	442G	162G	280G	37%	/

20. /sys/devices/virtual/dmi/id

Vendor:	Lenovo
Product:	ThinkSystem SR645 V3 MB, Genoa, DDR5, Oahu, 1U

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.55 GHz, AMD EPYC 9184X)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

Product Family: ThinkSystem
Serial: 1234567890

21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

10x SK Hynix HMCG88AEBRA115N 32 GB 2 rank 4800
4x SK Hynix HMCG88AEBRA168N 32 GB 2 rank 4800
10x SK Hynix HMCG88AEBRA173N 32 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: KAE115K-3.10
BIOS Date: 10/27/2023
BIOS Revision: 3.10
Firmware Revision: 2.30

Compiler Version Notes

=====

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aoxx-compiler-4.0.0/bin

=====

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aoxx-compiler-4.0.0/bin

=====

Fortran | 648.exchange2_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aoxx-compiler-4.0.0/bin

=====



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.55 GHz, AMD EPYC 9184X)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -futo -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc

C++ benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -futo
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.55 GHz, AMD EPYC 9184X)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.55 GHz, AMD EPYC 9184X)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Nov-2022

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264_s: Same as 605.mcf_s

657.xz_s: Same as 605.mcf_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdaloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.55 GHz, AMD EPYC 9184X)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Nov-2022

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-Genoa-T.html>
<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-Genoa-T.xml>
<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-24 13:36:37-0500.

Report generated on 2023-12-20 13:13:43 by CPU2017 PDF formatter v6716.

Originally published on 2023-12-20.