



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECSpeed®2017_int_base = 12.1

SPECSpeed®2017_int_peak = 12.4

CPU2017 License: 9019


Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

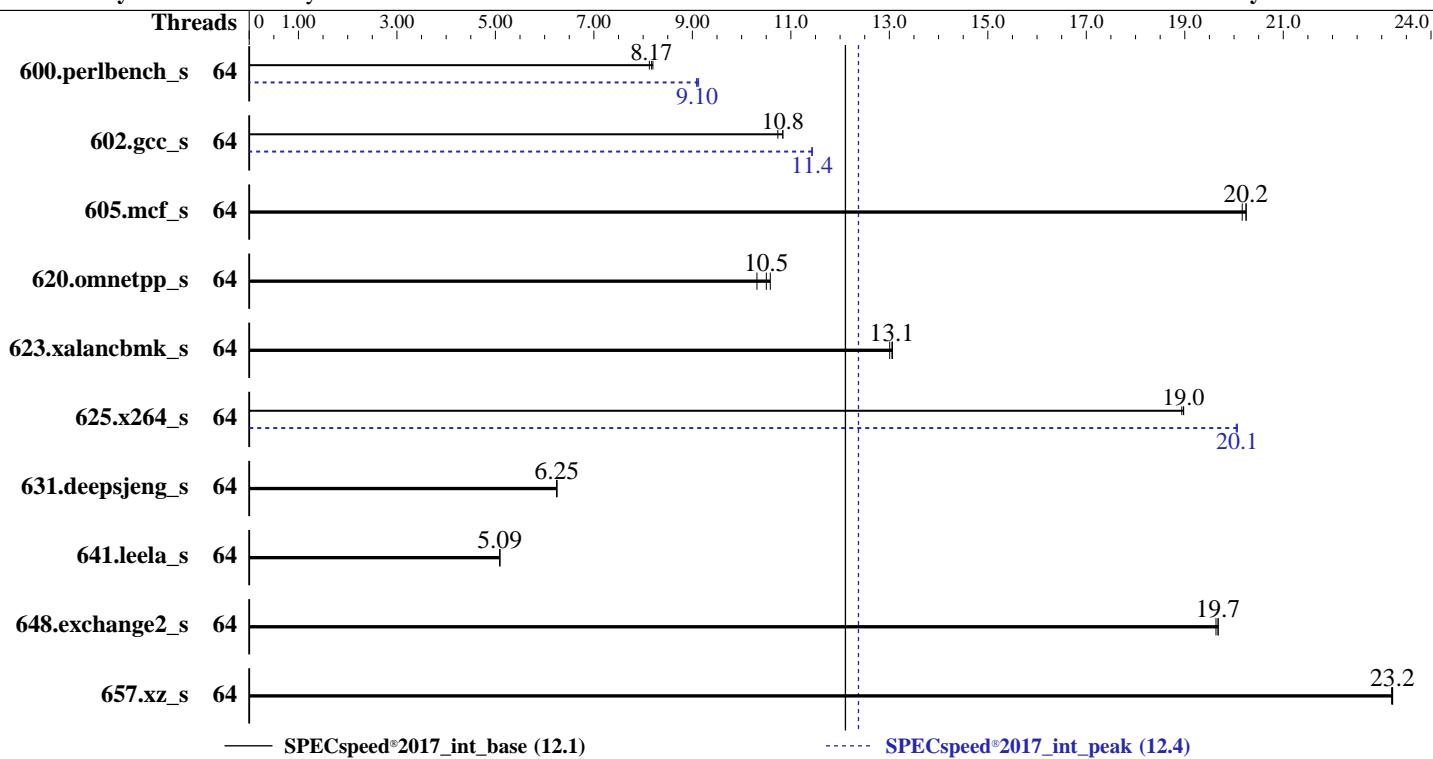

Hardware

CPU Name: Intel Xeon Platinum 8454H
 Max MHz: 3400
 Nominal: 2100
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 82.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB M.2 SSD SATA
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 Compiler: 5.14.21-150400.22-default
 C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 4.3.2d released Nov-2023
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer power save with minimal impact on performance



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECspeed®2017_int_base = 12.1

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	218	8.13	217	8.17	216	8.20	64	194	9.13	195	9.09	195	9.10		
602.gcc_s	64	371	10.7	367	10.8	367	10.8	64	348	11.4	348	11.4	348	11.4		
605.mcf_s	64	234	20.2	233	20.2	233	20.2	64	234	20.2	233	20.2	233	20.2		
620.omnetpp_s	64	158	10.3	154	10.6	155	10.5	64	158	10.3	154	10.6	155	10.5		
623.xalancbmk_s	64	109	13.0	109	13.1	108	13.1	64	109	13.0	109	13.1	108	13.1		
625.x264_s	64	93.1	18.9	93.0	19.0	93.0	19.0	64	87.9	20.1	88.0	20.0	87.9	20.1		
631.deepsjeng_s	64	230	6.24	229	6.25	229	6.25	64	230	6.24	229	6.25	229	6.25		
641.leela_s	64	335	5.09	335	5.09	335	5.09	64	335	5.09	335	5.09	335	5.09		
648.exchange2_s	64	149	19.7	149	19.7	150	19.6	64	149	19.7	149	19.7	150	19.6		
657.xz_s	64	266	23.2	266	23.2	266	23.2	64	266	23.2	266	23.2	266	23.2		
SPECspeed®2017_int_base = 12.1								SPECspeed®2017_int_peak = 12.4								

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECspeed®2017_int_base = 12.1

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes

BIOS Settings:
Intel Hyper-Threading Technology set to Disabled
Sub NUMA Clustering set to Disabled
LLC Dead Line set to Disabled
ADDC Sparing set to Disabled
Processor C6 Report set to Enabled
UPI Link Enablement 1
UPI Power Management Enabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sun Feb 4 08:14:57 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
08:14:57 up 3 min, 1 user, load average: 0.11, 0.09, 0.03
USER   TTY   FROM           LOGIN@   IDLE   JCPU   PCPU WHAT
root   tty1   -          08:12    9.00s  1.67s  0.21s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8454H,
2.10GHz)

SPECspeed®2017_int_base = 12.1

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals          (-i) 4126940
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes       (-u) 4126940
virtual memory           (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
-bash  
runcpu --define default-platform-flags -c ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=64  
--tune all -o all --define drop_caches intspeed  
runcpu --define default-platform-flags --configfile ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define  
cores=64 --tune all --output_format all --define drop_caches --nopower --runmode speed --tune base:peak  
--size refspeed intspeed --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.011/templogs/preenv.intspeed.011.0.log --lognum 011.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/cpu2017
```

```
-----  
6. /proc/cpuinfo  
model name      : Intel(R) Xeon(R) Platinum 8454H  
vendor_id        : GenuineIntel  
cpu family      : 6  
model           : 143  
stepping         : 8  
microcode        : 0xb0004b1  
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs  
cpu cores        : 32  
siblings          : 32  
2 physical ids (chips)  
64 processors (hardware threads)  
physical id 0: core ids 0-31  
physical id 1: core ids 0-31  
physical id 0: apicids  
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62  
physical id 1: apicids  
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1  
80,182,184,186,188,190  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.2:  
Architecture: x86_64
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8454H, 2.10GHz)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017_int_base = 12.1

SPECspeed®2017_int_peak = 12.4

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

CPU op-mode(s):           32-bit, 64-bit
Address sizes:            46 bits physical, 57 bits virtual
Byte Order:               Little Endian
CPU(s):                  64
On-line CPU(s) list:     0-63
Vendor ID:                GenuineIntel
Model name:              Intel(R) Xeon(R) Platinum 8454H
CPU family:               6
Model:                   143
Thread(s) per core:      1
Core(s) per socket:       32
Socket(s):                2
Stepping:                 8
CPU max MHz:              3400.0000
CPU min MHz:              800.0000
BogoMIPS:                 4200.00
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                           clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                           lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                           nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
                           ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                           x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                           abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
                           intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                           tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
                           avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                           sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                           cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
                           avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                           hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                           vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
                           bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                           tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_ll1d arch_capabilities
                           3 MiB (64 instances)
                           2 MiB (64 instances)
                           128 MiB (64 instances)
                           165 MiB (2 instances)
L1d cache:                  2
L1i cache:                  0-31
L2 cache:                  32-63
L3 cache:                  Not affected
NUMA node(s):                2
NUMA node0 CPU(s):          0-31
NUMA node1 CPU(s):          32-63
Vulnerability Itlb multihit: Not affected
Vulnerability Llft:          Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	82.5M	165M	15	Unified	3	90112	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECspeed®2017_int_base = 12.1

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
available: 2 nodes (0-1)
node 0 cpus: 0-31
node 0 size: 515734 MB
node 0 free: 513935 MB
node 1 cpus: 32-63
node 1 size: 516024 MB
node 1 free: 515312 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10

-----
9. /proc/meminfo
MemTotal:      1056521152 kB

-----
10. who -r
run-level 3 Feb 4 08:12

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target      Status
multi-user          running

-----
12. Services, from systemctl list-unit-files
STATE            UNIT FILES
enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance iscsi
                  issue-generator kbdsettings klog libvирtd lvm2-monitor nscd postfix purge-kernels rollback
                  rsyslog smartd sshd wickedd-wicked4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
                  firewalld gpm grub2-once haveged-switch-root ipmi ipmievд iscsi-init iscsid
                  issue-add-ssh-keys kdump kdump-early kexec-load ksm kvm kvm_stat libvirt-guests lunmask
                  man-db-create multipathd nfs nfs-blkmap nfs-server nfsserver rdisc rpcbind rpmconfigcheck
                  rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter
                  svnserve systemd-boot-check-no-failures systemd-network-generator systemd-nspawn@
                  systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced
                  virtnetworkd virtnodedeved virtnwfiterd virtproxyd virtqemud virtsecretd virtstoraged
indirect        pcscd virtlockd virtlogd wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=2e0ad397-074a-46f8-9f0a-5231b03b9d87
splash=silent
mitigations=auto
quiet
security=apparmor

-----
14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.40 GHz.
The governor "powersave" may decide which speed to use
within this range.
boost state support:
Supported: yes
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8454H,
2.10GHz)

SPECspeed®2017_int_base = 12.1

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

Active: yes

```
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0
```

```
16. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
```

```
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

```
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        btrfs  445G  15G  430G  4% /home
```

```
20. /sys/devices/virtual/dmi/id
Vendor:          Cisco Systems Inc
Product:         UCSC-C220-M7S
Serial:          WZP2702091W
```

```
21. dmidecode
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8454H, 2.10GHz)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017_int_base = 12.1

SPECspeed®2017_int_peak = 12.4

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Platform Notes (Continued)

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 0xCE00 M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.

BIOS Version: C220M7.4.3.2d.0.1101232037

BIOS Date: 11/01/2023

BIOS Revision: 5.31

Compiler Version Notes

=====

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran | 648.exchange2_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8454H,
2.10GHz)

SPECspeed®2017_int_base = 12.1

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64  
602.gcc_s: -DSPEC_LP64  
605.mcf_s: -DSPEC_LP64  
620.omnetpp_s: -DSPEC_LP64  
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX  
625.x264_s: -DSPEC_LP64  
631.deepsjeng_s: -DSPEC_LP64  
641.leela_s: -DSPEC_LP64  
648.exchange2_s: -DSPEC_LP64  
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8454H,
2.10GHz)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017_int_base = 12.1

SPECspeed®2017_int_peak = 12.4

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

```
605.mcf_s: basepeak = yes
```

```
625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
657.xz_s: basepeak = yes
```

C++ benchmarks:

```
620.omnetpp_s: basepeak = yes
```

```
623.xalancbmk_s: basepeak = yes
```

```
631.deepsjeng_s: basepeak = yes
```

```
641.leela_s: basepeak = yes
```

Fortran benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Platinum 8454H,
2.10GHz)

SPECspeed®2017_int_base = 12.1

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revM.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revM.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-04 08:14:57-0500.

Report generated on 2024-02-28 19:08:30 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-27.