



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R6615 (AMD EPYC 9754 128-Core Processor)

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Nov-2023

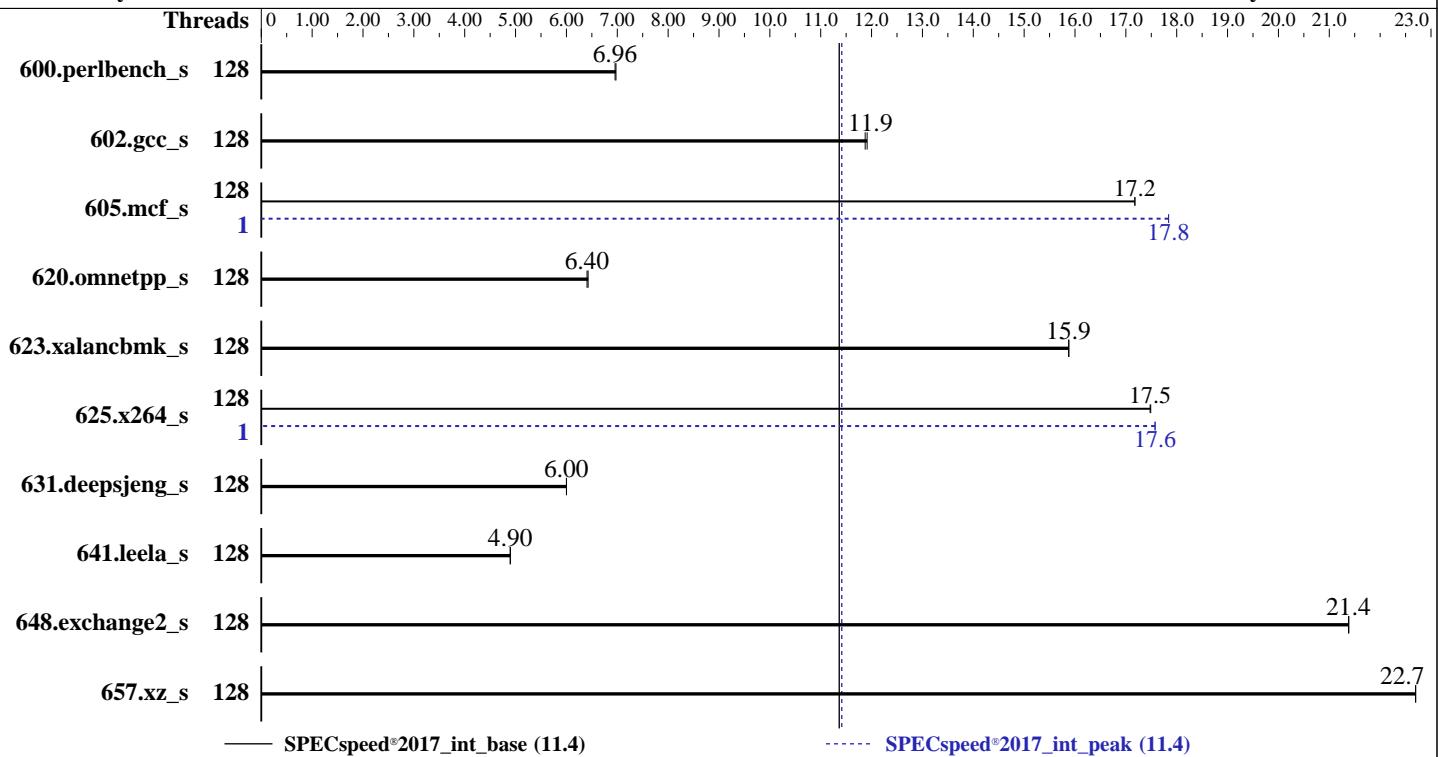

Hardware		Software	
CPU Name:	AMD EPYC 9754	OS:	Ubuntu 22.04.3 LTS
Max MHz:	3100		5.15.0-89-generic
Nominal:	2250	Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Enabled:	128 cores, 1 chip	Parallel:	Yes
Orderable:	1 chip	Firmware:	Version 1.4.6 released Jul-2023
Cache L1:	32 KB I + 32 KB D on chip per core	File System:	tmpfs
L2:	1 MB I+D on chip per core	System State:	Run level 3 (multi-user)
L3:	256 MB I+D on chip per chip, 16 MB shared / 8 cores	Base Pointers:	64-bit
Other:	None	Peak Pointers:	64-bit
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)	Other:	None
Storage:	80 GB on tmpfs	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.
Other:	None		



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 11.4

SPECspeed®2017\_int\_peak = 11.4

PowerEdge R6615 (AMD EPYC 9754 128-Core Processor)

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Nov-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	128	<b>255</b>	<b>6.96</b>	255	6.97			128	<b>255</b>	<b>6.96</b>	255	6.97		
602.gcc_s	128	334	11.9	<b>335</b>	<b>11.9</b>			128	334	11.9	<b>335</b>	<b>11.9</b>		
605.mcf_s	128	275	17.2	<b>275</b>	<b>17.2</b>			1	<b>265</b>	<b>17.8</b>	265	17.8		
620.omnetpp_s	128	254	6.43	<b>255</b>	<b>6.40</b>			128	254	6.43	<b>255</b>	<b>6.40</b>		
623.xalancbmk_s	128	89.2	15.9	<b>89.3</b>	<b>15.9</b>			128	89.2	15.9	<b>89.3</b>	<b>15.9</b>		
625.x264_s	128	101	17.5	<b>101</b>	<b>17.5</b>			1	100	17.6	<b>100</b>	<b>17.6</b>		
631.deepsjeng_s	128	<b>239</b>	<b>6.00</b>	239	6.00			128	<b>239</b>	<b>6.00</b>	239	6.00		
641.leela_s	128	348	4.90	<b>348</b>	<b>4.90</b>			128	348	4.90	<b>348</b>	<b>4.90</b>		
648.exchange2_s	128	<b>138</b>	<b>21.4</b>	137	21.4			128	<b>138</b>	<b>21.4</b>	137	21.4		
657.xz_s	128	<b>272</b>	<b>22.7</b>	272	22.7			128	<b>272</b>	<b>22.7</b>	272	22.7		
SPECspeed®2017_int_base = 11.4														
SPECspeed®2017_int_peak = 11.4														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9754 128-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_int\_base = 11.4

SPECspeed®2017\_int\_peak = 11.4

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Nov-2023

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-127"  
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/amd_speed_aocc400_znver4_A_lib/lib:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "128"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```
DRAM Refresh Delay : Performance  
DIMM Self Healing on
```

```
Uncorrectable Memory Error : Disabled
```

```
Logical Processor : Disabled
```

```
Virtualization Technology : Disabled  
NUMA Nodes per Socket : 4
```

```
System Profile : Custom
```

```
C-States : Disabled
```

```
Memory Patrol Scrub : Disabled
```

```
PCI ASPM L1 Link
```

```
Power Management : Disabled
```

```
Determinism Slider : Power Determinism
```

```
Algorithm Performance
```

```
Boost Disable (ApbDis) : Enabled
```

```
Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on amd-sut Sun Dec 3 23:41:44 2023
```

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 11.4

SPECspeed®2017\_int\_peak = 11.4

PowerEdge R6615 (AMD EPYC 9754 128-Core Processor)

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Nov-2023

## Platform Notes (Continued)

Table of contents

1. uname -a  
2. w  
3. Username  
4. ulimit -a  
5. sysinfo process ancestry  
6. /proc/cpuinfo  
7. lscpu  
8. numactl --hardware  
9. /proc/meminfo  
10. who -r  
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.11)  
12. Services, from systemctl list-unit-files  
13. Linux kernel boot-time arguments, from /proc/cmdline  
14. cpupower frequency-info  
15. tuned-adm active  
16. sysctl  
17. /sys/kernel/mm/transparent\_hugepage  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
19. OS release  
20. Disk information  
21. /sys/devices/virtual/dmi/id  
22. dmidecode  
23. BIOS

1. uname -a  
Linux amd-sut 5.15.0-89-generic #99-Ubuntu SMP Mon Oct 30 20:42:41 UTC 2023 x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
23:41:44 up 4 min, 1 user, load average: 0.12, 0.09, 0.03  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttysl - 23:40 1:04 1.82s 0.36s /bin/bash ./amd\_speed\_aocc400\_znver4\_A1.sh

3. Username  
From environment variable \$USER: root

4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 2097152  
process 3093789  
nofiles 1024  
vmmemory(kbytes) unlimited  
locks unlimited  
rtprio 0

5. sysinfo process ancestry  
/sbin/init

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9754 128-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_int\_base = 11.4

SPECspeed®2017\_int\_peak = 11.4

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Nov-2023

## Platform Notes (Continued)

```
/bin/login -p --
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1
--define DL-VERS=v4.8.1 --output_format html,pdf,txt
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.1
--output_format html,pdf,txt intspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.1
--output_format html,pdf,txt --nopower --runmode speed --tune base:peak --size test:train:refspeed
intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log
--lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1
```

```
-----
6. /proc/cpuinfo
    model name      : AMD EPYC 9754 128-Core Processor
    vendor_id       : AuthenticAMD
    cpu family     : 25
    model          : 160
    stepping        : 2
    microcode       : 0xaa00212
    bugs            : sysret_ss_atrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 3584 4K pages
    cpu cores      : 128
    siblings        : 128
    1 physical ids (chips)
    128 processors (hardware threads)
    physical id 0: core ids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
    240-247
    physical id 0: apicids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
    240-247
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu
```

```
From lscpu from util-linux 2.37.2:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 128
On-line CPU(s) list:    0-127
Vendor ID:               AuthenticAMD
Model name:              AMD EPYC 9754 128-Core Processor
CPU family:              25
Model:                  160
Thread(s) per core:     1
Core(s) per socket:     128
Socket(s):              1
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9754 128-Core Processor)

**SPECspeed®2017\_int\_base = 11.4**

**SPECspeed®2017\_int\_peak = 11.4**

**CPU2017 License:** 6573

**Test Date:** Dec-2023

**Test Sponsor:** Dell Inc.

**Hardware Availability:** May-2023

**Tested by:** Dell Inc.

**Software Availability:** Nov-2023

## Platform Notes (Continued)

```

Stepping: 2
BogoMIPS: 4501.50
Flags: fpu vme de pse tsc msr pae cx8 apic sep mtrr pge mca cmov pat pse36
       clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
       lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf
       rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
       movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
       cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
       topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13
       cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
       fsgsbase bmil avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq
       rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
       avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occur_llc
       cqmq_mbm_total cqmq_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
       wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrrip_save tsc_scale
       vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
       v_vmsave_vmlload vgif v_spec_ctrl avx512vbmi umip pkru ospke avx512_vbomi2
       gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpocntdq la57
       rdpid overflow_recov succor smca fsrm flush_ll1d
AMD-V
Virtualization:
L1d cache: 4 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 128 MiB (128 instances)
L3 cache: 256 MiB (16 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-31
NUMA node1 CPU(s): 32-63
NUMA node2 CPU(s): 64-95
NUMA node3 CPU(s): 96-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
filling, PBRSB-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4M	8	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	8	Unified	2	2048	1	64
L3	16M	256M	16	Unified	3	16384	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-31
node 0 size: 193072 MB
node 0 free: 192193 MB
node 1 cpus: 32-63
node 1 size: 193526 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 11.4

SPECspeed®2017\_int\_peak = 11.4

PowerEdge R6615 (AMD EPYC 9754 128-Core Processor)

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Nov-2023

## Platform Notes (Continued)

```
node 1 free: 189272 MB
node 2 cpus: 64-95
node 2 size: 193478 MB
node 2 free: 192556 MB
node 3 cpus: 96-127
node 3 size: 193483 MB
node 3 free: 192671 MB
node distances:
node 0 1 2 3
 0: 10 12 12 12
 1: 12 10 12 12
 2: 12 12 10 12
 3: 12 12 12 10

-----
9. /proc/meminfo
MemTotal: 792126060 kB

-----
10. who -r
run-level 3 Dec 3 23:37

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.11)
Default Target Status
multi-user running

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled blk-availability console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors networkd-dispatcher
pollinate rsyslog secureboot-db setvtrgb ssh systemd-networkd systemd-pstore
systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
vgauth wpa_supplicant
enabled-runtime netplan-ovs-cleanupsystemd-fsck-root systemd-networkd-wait-online systemd-remount-fs
disabled ModemManager apparmor console-getty debug-shell iscsid lvm2-monitor lxd-agent multipathd
nftables open-iscsi open-vm-tools rsync serial-getty@ systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync ufw upower
wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated apport
indirect uuid
masked NetworkManager NetworkManager-dispatcher NetworkManager-wait-online cryptdisks
cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo x11-common

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.15.0-89-generic
root=UUID=593ab29a-c8fe-4d75-821a-b60d5c945311
ro

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 11.4

SPECspeed®2017\_int\_peak = 11.4

PowerEdge R6615 (AMD EPYC 9754 128-Core Processor)

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Nov-2023

## Platform Notes (Continued)

Pstate-P0: 2250MHz

-----  
15. tuned-adm active  
Current active profile: latency-performance

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 3  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 1  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 1

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag [always] defer defer+madvise madvise never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Ubuntu 22.04.3 LTS

-----  
20. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 80G 3.4G 77G 5% /mnt/ramdisk

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: Dell Inc.  
Product: PowerEdge R6615

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9754 128-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_int\_base = 11.4

SPECspeed®2017\_int\_peak = 11.4

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Nov-2023

## Platform Notes (Continued)

Product Family: PowerEdge  
Serial: GLM4030

-----  
22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x 80AD000080AD HMCG94MEBRA109N 64 GB 2 rank 4800

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.4.6  
BIOS Date: 07/06/2023  
BIOS Revision: 1.4

## Compiler Version Notes

=====

C	600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)	657.xz_s(base, peak)
---	--	----------------------

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

=====

C++	620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)	641.leela_s(base, peak)
-----	---	-------------------------

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

=====

Fortran	648.exchange2_s(base, peak)
---------	-----------------------------

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

## Base Compiler Invocation

C benchmarks:  
clang

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9754 128-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_int\_base = 11.4

SPECspeed®2017\_int\_peak = 11.4

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Nov-2023

## Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdaloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdaloc-ext
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 11.4

SPECspeed®2017\_int\_peak = 11.4

PowerEdge R6615 (AMD EPYC 9754 128-Core Processor)

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Nov-2023

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9754 128-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_int\_base = 11.4

SPECspeed®2017\_int\_peak = 11.4

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Nov-2023

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang

625.x264\_s: Same as 605.mcf\_s

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9754 128-Core Processor)

SPECspeed®2017\_int\_base = 11.4

SPECspeed®2017\_int\_peak = 11.4

**CPU2017 License:** 6573

**Test Date:** Dec-2023

**Test Sponsor:** Dell Inc.

**Hardware Availability:** May-2023

**Tested by:** Dell Inc.

**Software Availability:** Nov-2023

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.html](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.xml](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-03 18:41:44-0500.

Report generated on 2024-02-29 17:32:50 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-29.