



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_base = 1220

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865


Test Date: Apr-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

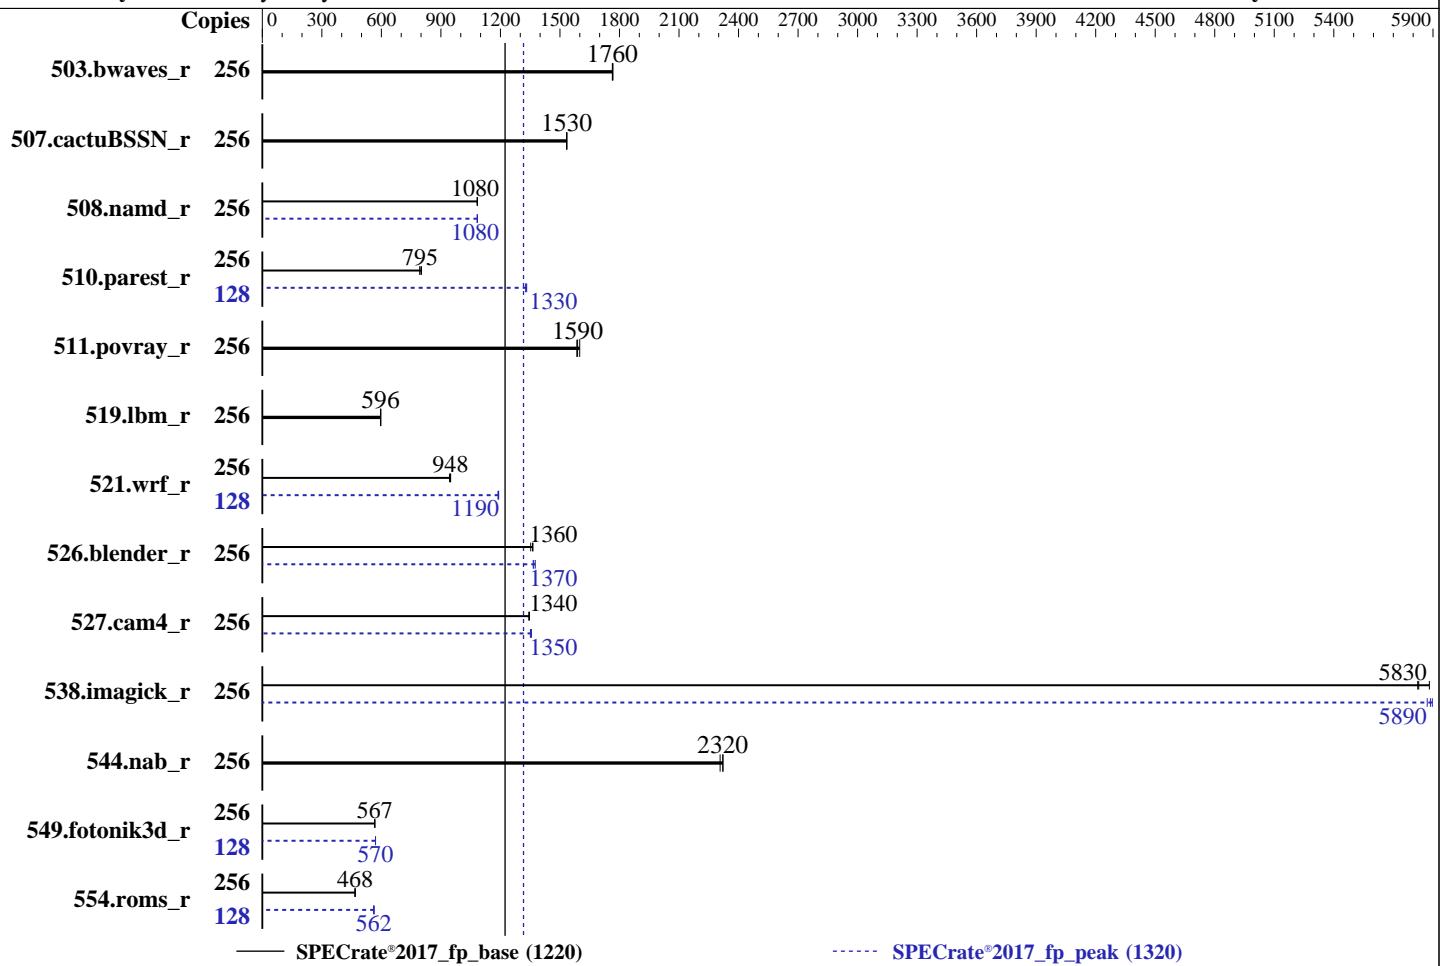

Hardware		Software	
CPU Name:	AMD EPYC 9554	OS:	Red Hat Enterprise Linux release 9 (Plow)
Max MHz:	3750		5.14.0-70.22.1.el9_0.x86_64
Nominal:	3100	Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Enabled:	128 cores, 2 chips, 2 threads/core	Parallel:	No
Orderable:	1,2 chips	Firmware:	Version 4.02.28 released Jan-2024
Cache L1:	32 KB I + 32 KB D on chip per core	File System:	xfs
L2:	1 MB I+D on chip per core	System State:	Run level 3 (multi-user)
L3:	256 MB I+D on chip per chip, 32 MB shared / 8 cores	Base Pointers:	64-bit
Other:	None	Peak Pointers:	64-bit
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)	Other:	None
Storage:	1 x 1 TB NVME SSD	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.
Other:	CPU Cooling: Air		



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017\_fp\_base = 1220

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865

Test Date: Apr-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	<b>1455</b>	<b>1760</b>	1453	1770	1455	1760	256	<b>1455</b>	<b>1760</b>	1453	1770	1455	1760
507.cactusBSSN_r	256	211	1530	211	1530	<b>211</b>	<b>1530</b>	256	211	1530	211	1530	<b>211</b>	<b>1530</b>
508.namd_r	256	225	1080	<b>224</b>	<b>1080</b>	224	1080	256	225	1080	<b>224</b>	<b>1080</b>	224	1080
510.parest_r	256	844	794	835	802	<b>843</b>	<b>795</b>	128	252	1330	251	1330	<b>252</b>	<b>1330</b>
511.povray_r	256	377	1590	374	1600	<b>376</b>	<b>1590</b>	256	377	1590	374	1600	<b>376</b>	<b>1590</b>
519.lbm_r	256	453	596	452	597	<b>453</b>	<b>596</b>	256	453	596	452	597	<b>453</b>	<b>596</b>
521.wrf_r	256	<b>605</b>	<b>948</b>	604	949	608	944	128	<b>241</b>	<b>1190</b>	241	1190	241	1190
526.blender_r	256	286	1360	<b>286</b>	<b>1360</b>	288	1350	256	<b>285</b>	<b>1370</b>	286	1370	283	1380
527.cam4_r	256	333	1340	333	1350	<b>333</b>	<b>1340</b>	256	330	1360	331	1350	<b>331</b>	<b>1350</b>
538.imagick_r	256	109	5820	108	5880	<b>109</b>	<b>5830</b>	256	108	5870	<b>108</b>	<b>5890</b>	108	5900
544.nab_r	256	<b>186</b>	<b>2320</b>	186	2320	187	2310	256	<b>186</b>	<b>2320</b>	186	2320	187	2310
549.fotonik3d_r	256	<b>1760</b>	<b>567</b>	1762	566	1760	567	128	875	570	<b>874</b>	<b>570</b>	874	571
554.roms_r	256	<b>870</b>	<b>468</b>	869	468	871	467	128	363	561	<b>362</b>	<b>562</b>	361	564

SPECrate®2017\_fp\_base = 1220

SPECrate®2017\_fp\_peak = 1320

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_base = 1220

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865

Test Date: Apr-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/CPU2017/amd_rate_aocc400_genoa_B_lib/lib:/home/CPU2017/amd_rate_aocc400_genoa_B_lib/lib32:  
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

SVM Mode set to Disable

DRAM Scrub time set to Disable

NUMA nodes per socket set to NPS4

Determinism Slider set to Power

cTDP set to 400

Package Power Limit set to 400

```
Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Apr 9 04:45:01 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 250 (250-6.el9\_0)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_base = 1220

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865

Test Date: Apr-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

## Platform Notes (Continued)

```
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-----
-----
1. uname -a
Linux localhost 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64 x86_64 x86_64
GNU/Linux
-----
2. w
 04:45:01 up 5:20, 1 user, load average: 140.25, 224.92, 241.50
USER      TTY      LOGIN@     IDLE   JCPU    PCPU WHAT
root      tty1     23:29     5:14m  1.56s  0.34s /bin/bash ./amd_rate_aocc400_genoa_B1.sh
-----
3. Username
From environment variable $USER: root
-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size          (blocks, -c) 0
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 6191126
max locked memory        (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 6191126
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
login -- root
-bash
python3 ./run_amd_rate_aocc400_genoa_B1.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower --runmode
  rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017\_fp\_base = 1220

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865

Test Date: Apr-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

## Platform Notes (Continued)

```
6. /proc/cpuinfo
model name      : AMD EPYC 9554 64-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 17
stepping        : 1
microcode       : 0xa10113e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores       : 64
siblings         : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
physical id 1: apicids 128-255
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
7. lscpu
```

```
From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 256
On-line CPU(s) list:    0-255
Vendor ID:               AuthenticAMD
BIOS Vendor ID:         Advanced Micro Devices, Inc.
Model name:              AMD EPYC 9554 64-Core Processor
BIOS Model name:        AMD EPYC 9554 64-Core Processor
CPU family:              25
Model:                  17
Thread(s) per core:     2
Core(s) per socket:     64
Socket(s):              2
Stepping:                1
Frequency boost:        enabled
CPU max MHz:            3762.9880
CPU min MHz:            1500.0000
BogoMIPS:                6190.88
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnopprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsaves xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Kaytus Systems Pte. Ltd.**

**KR2280E2 (AMD EPYC 9554)**

**SPECrate®2017\_fp\_base = 1220**

**SPECrate®2017\_fp\_peak = 1320**

**CPU2017 License:** 6865

**Test Date:** Apr-2024

**Test Sponsor:** Kaytus Systems Pte. Ltd.

**Hardware Availability:** Feb-2023

**Tested by:** Kaytus Systems Pte. Ltd.

**Software Availability:** Nov-2022

## Platform Notes (Continued)

umip pkv ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg  
avx512\_vpopcntdq la57 rdpid overflow\_recov succor smca fsrm flush\_lld

Virtualization:

AMD-V

L1d cache:

4 MiB (128 instances)

L1i cache:

4 MiB (128 instances)

L2 cache:

128 MiB (128 instances)

L3 cache:

512 MiB (16 instances)

NUMA node(s):

8

NUMA node0 CPU(s):

0-15,128-143

NUMA node1 CPU(s):

16-31,144-159

NUMA node2 CPU(s):

32-47,160-175

NUMA node3 CPU(s):

48-63,176-191

NUMA node4 CPU(s):

64-79,192-207

NUMA node5 CPU(s):

80-95,208-223

NUMA node6 CPU(s):

96-111,224-239

NUMA node7 CPU(s):

112-127,240-255

Vulnerability Itlb multihit:

Not affected

Vulnerability Llft:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP always-on, RSB filling

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4M	8	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-15,128-143

node 0 size: 193281 MB

node 0 free: 191921 MB

node 1 cpus: 16-31,144-159

node 1 size: 193529 MB

node 1 free: 192140 MB

node 2 cpus: 32-47,160-175

node 2 size: 193529 MB

node 2 free: 192212 MB

node 3 cpus: 48-63,176-191

node 3 size: 193492 MB

node 3 free: 192125 MB

node 4 cpus: 64-79,192-207

node 4 size: 193529 MB

node 4 free: 192183 MB

node 5 cpus: 80-95,208-223

node 5 size: 193529 MB

node 5 free: 192161 MB

node 6 cpus: 96-111,224-239

node 6 size: 193529 MB

node 6 free: 192062 MB

node 7 cpus: 112-127,240-255

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017\_fp\_base = 1220

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865

Test Date: Apr-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

## Platform Notes (Continued)

```
node 7 size: 193466 MB
node 7 free: 192108 MB
node distances:
node  0   1   2   3   4   5   6   7
 0: 10 12 12 12 32 32 32 32
 1: 12 10 12 12 32 32 32 32
 2: 12 12 10 12 32 32 32 32
 3: 12 12 12 10 32 32 32 32
 4: 32 32 32 32 10 12 12 12
 5: 32 32 32 32 12 10 12 12
 6: 32 32 32 32 12 12 10 12
 7: 32 32 32 32 12 12 12 10

-----
9. /proc/meminfo
MemTotal:      1585035636 kB

-----
10. who -r
run-level 3 Apr 8 23:24

-----
11. Systemd service manager version: systemd 250 (250-6.e19_0)
Default Target  Status
multi-user      running

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        dbus-broker getty@ tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled       NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd
                blk-availability canberra-system-bootup canberra-system-shutdown
                canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower crond
                debug-shell firewalld irqbalance kdump kvm_stat lvm2-monitor man-db-restart-cache-update
                mdmonitor microcode nftables nis-domainname rdisc rhsm rhsm-facts rhsmcertd rpmdb-rebuild
                rsyslog selinux-autorelabel-mark sep5 serial-getty@ sshd sshd-keygen@ sssd
                systemd-boot-check-no-failures systemd-network-generator systemd-pstore systemd-sysext
indirect        sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.e19_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

-----
14. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 3.10 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
        Supported: yes
        Active: yes
        Boost States: 0
        Total States: 3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017\_fp\_base = 1220

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865

Test Date: Apr-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

## Platform Notes (Continued)

Pstate-P0: 3100MHz

-----  
15. tuned-adm active  
Current active profile: throughput-performance

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 1  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 1

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag [always] defer defer+madvise madvise never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.0 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)  
system-release Red Hat Enterprise Linux release 9.0 (Plow)

-----  
20. Disk information  
SPEC is set to: /home/CPU2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 819G 29G 790G 4% /home

-----  
21. /sys/devices/virtual/dmi/id

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_base = 1220

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865

Test Date: Apr-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

## Platform Notes (Continued)

Vendor: KAYTUS  
Product: KR2280-E2-A0-R0-00  
Product Family: Not specified  
Serial: 00000000

-----  
22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Hynix HMC94MEBRA109N 64 GB 2 rank 4800  
7x Samsung M329R8GA0BB0-CQKDG 64 GB 2 rank 4800  
10x Samsung M329R8GA0BB0-CQKEG 64 GB 2 rank 4800  
5x Samsung M329R8GA0BB0-CQKVG 64 GB 2 rank 4800

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 04.02.28  
BIOS Date: 01/04/2024

## Compiler Version Notes

=====

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_base = 1220

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865

Test Date: Apr-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

C++, C, Fortran | 507.cactusBSSN\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_base = 1220

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865

Test Date: Apr-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactusBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -fno -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdaloc -lflang
```

C++ benchmarks:

```
-m64 -fno -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdaloc
-lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_base = 1220

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865

Test Date: Apr-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_base = 1220

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Apr-2024

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_base = 1220

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Apr-2024

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

```
538.imagick_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc
```

544.nab\_r: basepeak = yes

C++ benchmarks:

```
508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc
```

```
510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

```
549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdaloc -lflang
```

```
554.roms_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_base = 1220

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Apr-2024

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

554.roms\_r (continued):

```
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdaloc -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-femap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdaloc
-lflang
```

```
527.cam4_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-femap-arrays -mllvm -reduce-array-computations=3 -zopt
-Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdaloc
-lflang
```

Benchmarks using both C and C++:

511.povray\_r: basepeak = yes

```
526.blender_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-femap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-finline-aggressive -mllvm -unroll-threshold=100 -lamdlibm
-lamdaloc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280E2 (AMD EPYC 9554)

SPECrate®2017\_fp\_base = 1220

SPECrate®2017\_fp\_peak = 1320

CPU2017 License: 6865

Test Date: Apr-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-amd-v1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-amd-v1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-09 04:45:01-0400.

Report generated on 2024-05-21 19:26:55 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-21.