



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 352

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_int\_peak = 362

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2024

Hardware Availability: Dec-2023

Software Availability: Apr-2024

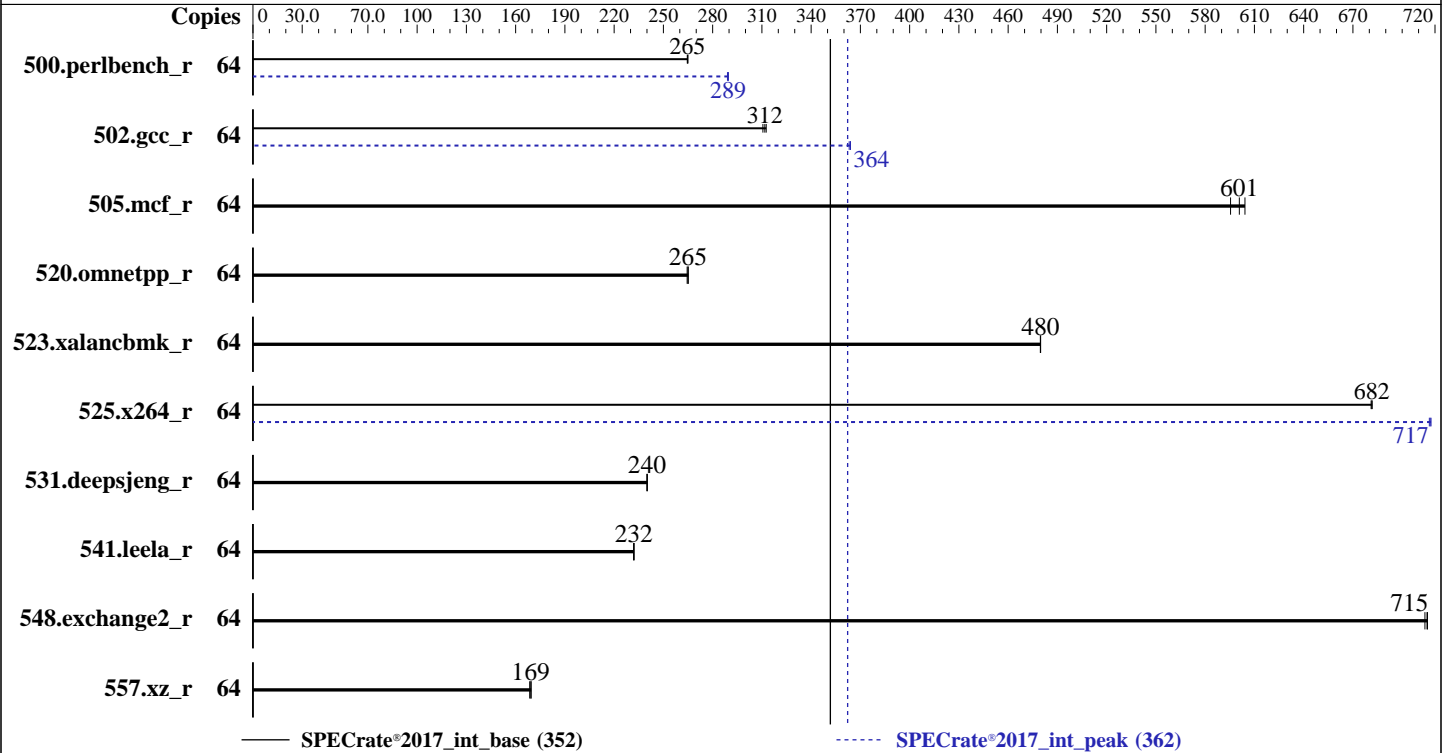

### Hardware

CPU Name: Intel Xeon Gold 6526Y  
 Max MHz: 3900  
 Nominal: 2800  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 37.5 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R, running at 5200)  
 Storage: 1 x 1.92 TB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.2 (Plow)  
 5.14.0-284.11.1.el9\_2.x86\_64  
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 01.01.03.05 Released Apr-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 352

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_int\_peak = 362

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Jun-2024  
Hardware Availability: Dec-2023  
Software Availability: Apr-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	385	265	385	265	<b>385</b>	<b>265</b>	64	352	290	<b>352</b>	<b>289</b>	353	289
502.gcc_r	64	292	311	<b>291</b>	<b>312</b>	290	313	64	<b>249</b>	<b>364</b>	250	363	249	364
505.mcf_r	64	171	604	174	595	<b>172</b>	<b>601</b>	64	171	604	174	595	<b>172</b>	<b>601</b>
520.omnetpp_r	64	317	265	318	264	<b>317</b>	<b>265</b>	64	317	265	318	264	<b>317</b>	<b>265</b>
523.xalancbmk_r	64	141	480	<b>141</b>	<b>480</b>	141	480	64	141	480	<b>141</b>	<b>480</b>	141	480
525.x264_r	64	165	681	<b>164</b>	<b>682</b>	164	682	64	156	717	<b>156</b>	<b>717</b>	156	718
531.deepsjeng_r	64	<b>306</b>	<b>240</b>	305	240	306	240	64	<b>306</b>	<b>240</b>	305	240	306	240
541.leela_r	64	457	232	<b>457</b>	<b>232</b>	457	232	64	457	232	<b>457</b>	<b>232</b>	457	232
548.exchange2_r	64	235	714	<b>234</b>	<b>715</b>	234	715	64	235	714	<b>234</b>	<b>715</b>	234	715
557.xz_r	64	<b>408</b>	<b>169</b>	408	169	410	169	64	<b>408</b>	<b>169</b>	408	169	410	169

SPECrate®2017\_int\_base = 352

SPECrate®2017\_int\_peak = 362

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/Uniautos/speccpu2017/lib/intel64:/home/Uniautos/speccpu2017/lib/ia32:/home/Uniautos/speccpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

```
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 352

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_int\_peak = 362

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

Performance Profile Set to Performance  
SNC Set to Enable SNC2 (2-clusters)  
Enable LP [Global] Set to ALL LPs

Sysinfo program /home/Uniautos/speccpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Wed Jun 26 19:03:02 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19\_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-284.11.1.e19\_2.x86\_64 #1 SMP PREEMPT\_DYNAMIC Wed Apr 12 10:45:03 EDT 2023 x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
19:03:02 up 2 min, 2 users, load average: 0.23, 0.19, 0.08  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 19:02 14.00s 1.19s 0.05s -bash  
root pts/0 19:02 40.00s 0.04s 0.04s -bash

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 352

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_int\_peak = 362

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

### Platform Notes (Continued)

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2060209
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2060209
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 64 -c ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg
--define smt-on --define cores=32 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base,peak -o all intrate
runcpu --define default-platform-flags --copies 64 --configfile
ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.145/temlogs/preenv.intrate.145.0.log --lognum 145.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Uniautos/speccpu2017
```

-----  
6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) GOLD 6526Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 16
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0-31
physical id 1: apicids 128-159
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 352

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_int\_peak = 362

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

## Platform Notes (Continued)

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            INTEL(R) XEON(R) GOLD 6526Y
BIOS Model name:      INTEL(R) XEON(R) GOLD 6526Y
CPU family:            6
Model:                 207
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):             2
Stepping:              2
BogoMIPS:              5600.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
                        ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                        rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
                        avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                        cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd
                        dtherm ida arat pln pts hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                        gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                        rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                        serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                        amx_int8 flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             1.5 MiB (32 instances)
L1i cache:             1 MiB (32 instances)
L2 cache:              64 MiB (32 instances)
L3 cache:              75 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-7,32-39
NUMA node1 CPU(s):    8-15,40-47
NUMA node2 CPU(s):    16-23,48-55
NUMA node3 CPU(s):    24-31,56-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:   Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 352

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_int\_peak = 362

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

### Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	37.5M	75M	15	Unified	3	40960	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-7,32-39
node 0 size: 128078 MB
node 0 free: 120792 MB
node 1 cpus: 8-15,40-47
node 1 size: 128981 MB
node 1 free: 128487 MB
node 2 cpus: 16-23,48-55
node 2 size: 129020 MB
node 2 free: 128525 MB
node 3 cpus: 24-31,56-63
node 3 size: 129015 MB
node 3 free: 128402 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 527457300 kB

10. who -r

run-level 3 Jun 26 19:00

11. Systemd service manager version: systemd 252 (252-13.el9\_2)

```

Default Target Status
multi-user      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT          LOAD  ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

```

13. Services, from systemctl list-unit-files

```

STATE      UNIT FILES
enabled    NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
           dbus-broker getty@ insights-client-boot irqbalance kdump lvm2-monitor mdmonitor microcode
           nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd
           systemd-boot-update systemd-network-generator tuned udisks2
enabled-runtime
           systemd-remount-fs
disabled   blk-availability console-getty cpupower debug-shell dnf-system-upgrade firewalld kvm_stat
           man-db-restart-cache-update nftables rdisc rhcd rhsm rhsm-facts rpmdb-rebuild

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 352

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_int\_peak = 362

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

### Platform Notes (Continued)

indirect      selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures  
                  systemd-pstore systemd-sysextr  
                  sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate  
                  systemd-sysupdate-reboot

-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9\_2.x86\_64  
root=/dev/mapper/rhel-root  
ro  
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap

-----  
15. cpupower frequency-info  
analyzing CPU 0:  
  Unable to determine current policy  
  boost state support:  
    Supported: yes  
    Active: yes

-----  
16. tuned-adm active  
  Current active profile: throughput-performance

-----  
17. sysctl  
kernel.numa\_balancing           1  
kernel.randomize\_va\_space       2  
vm.compaction\_proactiveness     20  
vm.dirty\_background\_bytes       0  
vm.dirty\_background\_ratio       10  
vm.dirty\_bytes                   0  
vm.dirty\_expire\_centisecs       3000  
vm.dirty\_ratio                   40  
vm.dirty\_writeback\_centisecs     500  
vm.dirtytime\_expire\_seconds     43200  
vm.extfrag\_threshold             500  
vm.min\_unmapped\_ratio            1  
vm.nr\_hugepages                   0  
vm.nr\_hugepages\_mempolicy        0  
vm.nr\_overcommit\_hugepages       0  
vm.swappiness                    10  
vm.watermark\_boost\_factor        15000  
vm.watermark\_scale\_factor        10  
vm.zone\_reclaim\_mode             0

-----  
18. /sys/kernel/mm/transparent\_hugepage  
defrag           always defer defer+madvice [madvice] never  
enabled          [always] madvice never  
hpage\_pmd\_size   2097152  
shmem\_enabled    always within\_size advise [never] deny force

-----  
19. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs   60000  
defrag                   1

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 352

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_int\_peak = 362

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

### Platform Notes (Continued)

max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

-----  
20. OS release

From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.2 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)  
system-release Red Hat Enterprise Linux release 9.2 (Plow)

-----  
21. Disk information

SPEC is set to: /home/Uniautos/speccpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 1.7T 243G 1.5T 15% /home

-----  
22. /sys/devices/virtual/dmi/id

Vendor: XFUSION  
Product: 2288H V7  
Product Family: Eagle Stream  
Serial: 2106182101X3N8000001

-----  
23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Samsung M321R4GA3PB0-CWMCH 32 GB 2 rank 5600, configured at 5200  
14x Samsung M321R4GA3PB0-CWMXH 32 GB 2 rank 5600, configured at 5200

-----  
24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: XFUSION  
BIOS Version: 01.01.03.05  
BIOS Date: 04/12/2024  
BIOS Revision: 3.5

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 352

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_int\_peak = 362

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

### Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

### Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_int\_base = 352

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_int\_peak = 362

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

## Base Portability Flags (Continued)

520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 352

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_int\_peak = 362

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.0/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_int\_base = 352

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_int\_peak = 362

**CPU2017 License:** 6488

**Test Sponsor:** xFusion

**Tested by:** xFusion

**Test Date:** Jun-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Apr-2024

## Peak Optimization Flags (Continued)

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-06-26 07:03:01-0400.

Report generated on 2024-07-17 11:46:22 by CPU2017 PDF formatter v6716.

Originally published on 2024-07-16.