



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 16-Core Processor)

SPECSpeed®2017_int_base = 16.6

SPECSpeed®2017_int_peak = 16.8

CPU2017 License: 9019


Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

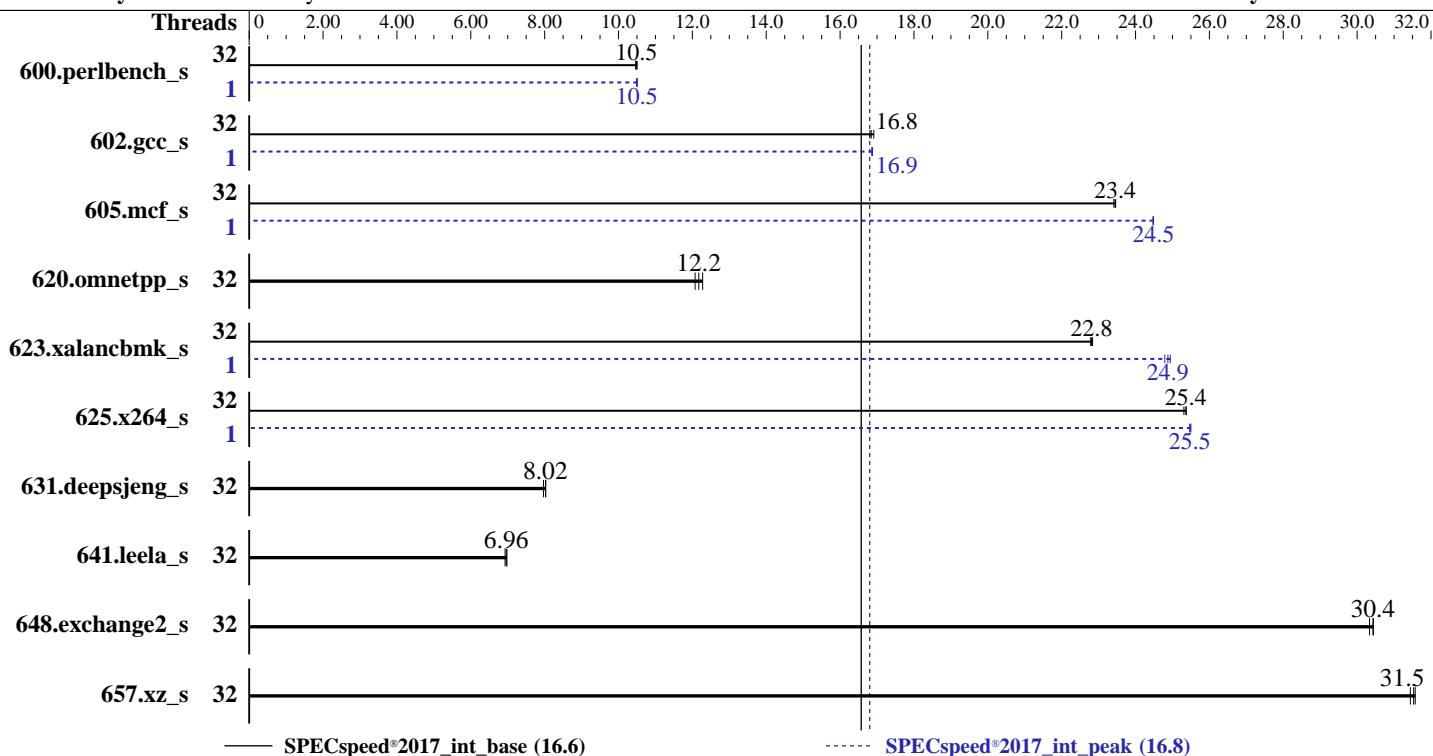

Hardware

CPU Name: AMD EPYC 9174F
 Max MHz: 4400
 Nominal: 4100
 Enabled: 32 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 2 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
 Storage: 1 x 1.6 TB NVME SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5
 kernel version 5.14.21-150500.53-default
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 4.3.4a released May-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 16-Core Processor)

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	<u>169</u>	<u>10.5</u>	169	10.5	170	10.5	1	<u>169</u>	10.5	169	10.5	<u>169</u>	<u>10.5</u>
602.gcc_s	32	<u>236</u>	<u>16.8</u>	235	16.9	237	16.8	1	<u>236</u>	16.9	<u>236</u>	<u>16.9</u>	236	16.9
605.mcf_s	32	202	23.4	201	23.5	<u>201</u>	<u>23.4</u>	1	<u>193</u>	<u>24.5</u>	193	24.5	193	24.5
620.omnetpp_s	32	135	12.1	<u>134</u>	<u>12.2</u>	133	12.3	32	135	12.1	<u>134</u>	<u>12.2</u>	133	12.3
623.xalancbmk_s	32	62.0	22.8	62.2	22.8	<u>62.1</u>	<u>22.8</u>	1	57.2	24.8	<u>57.0</u>	<u>24.9</u>	56.8	24.9
625.x264_s	32	<u>69.5</u>	<u>25.4</u>	69.5	25.4	69.7	25.3	1	69.2	25.5	69.3	25.5	<u>69.3</u>	<u>25.5</u>
631.deepsjeng_s	32	180	7.97	178	8.03	<u>179</u>	<u>8.02</u>	32	180	7.97	178	8.03	<u>179</u>	<u>8.02</u>
641.leela_s	32	246	6.93	<u>245</u>	<u>6.96</u>	244	6.98	32	246	6.93	<u>245</u>	<u>6.96</u>	244	6.98
648.exchange2_s	32	<u>96.6</u>	<u>30.4</u>	96.9	30.3	96.6	30.4	32	<u>96.6</u>	<u>30.4</u>	96.9	30.3	96.6	30.4
657.xz_s	32	<u>196</u>	<u>31.5</u>	196	31.6	197	31.4	32	<u>196</u>	<u>31.5</u>	196	31.6	197	31.4
SPECspeed®2017_int_base = 16.6							SPECspeed®2017_int_peak = 16.8							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 16-Core Processor)

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-31"  
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_znver4_A_lib/lib:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "32"
```

Environment variables set by runcpu during the 600.perlbench_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 602.gcc_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:
SMT Mode set to Disabled
NUMA nodes per socket set to NPS1
Determinism Slider set to Power
DF C-States set to Disabled
TDP set to 400
PPT set to 400
ACPI SRAT L3 Cache as NUMA Domain set to Enabled

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Thu Jul 11 00:12:06 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 16-Core Processor)

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

Platform Notes (Continued)

```
-----  
1. uname -a  
2. w  
3. Username  
4. ulimit -a  
5. sysinfo process ancestry  
6. /proc/cpuinfo  
7. lscpu  
8. numactl --hardware  
9. /proc/meminfo  
10. who -r  
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)  
12. Services, from systemctl list-unit-files  
13. Linux kernel boot-time arguments, from /proc/cmdline  
14. cpupower frequency-info  
15. sysctl  
16. /sys/kernel/mm/transparent_hugepage  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
18. OS release  
19. Disk information  
20. /sys/devices/virtual/dmi/id  
21. dmidecode  
22. BIOS  
-----
```

```
-----  
1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86_64 x86_64 x86_64 GNU/Linux  
-----
```

```
2. w  
00:12:06 up 16 min, 1 user, load average: 0.00, 0.00, 0.00  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttys1 - 14:55 22.00s 0.88s 0.06s /bin/bash ./amd_speed_aocc400_znver4_A1.sh  
-----
```

```
3. Username  
From environment variable $USER: root  
-----
```

```
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 6191428  
max locked memory       (kbytes, -l) 2097152  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority      (-r) 0  
stack size               (kbytes, -s) unlimited  
cpu time                (seconds, -t) unlimited  
max user processes       (-u) 6191428  
virtual memory           (kbytes, -v) unlimited  
file locks               (-x) unlimited  
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 16-Core Processor)

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

Platform Notes (Continued)

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
python3 ./run_amd_speed_aocc400_znver4_A1.py -b intspeed
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9174F 16-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 17
stepping        : 1
microcode       : 0xa101148
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores       : 16
siblings         : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113
physical id 1: core ids 0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113
physical id 0: apicids 0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113
physical id 1: apicids 128-129,144-145,160-161,176-177,192-193,208-209,224-225,240-241
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
7. lscpu
```

```
From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 32
On-line CPU(s) list:    0-31
Vendor ID:               AuthenticAMD
Model name:              AMD EPYC 9174F 16-Core Processor
CPU family:              25
Model:                  17
Thread(s) per core:     1
Core(s) per socket:      16
Socket(s):              2
Stepping:                1
Frequency boost:        enabled
CPU max MHz:             4100.0000
CPU min MHz:             1500.0000
BogoMIPS:                8187.81
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
                        aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 16-Core Processor)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

Test Date: Jul-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

Platform Notes (Continued)

```
x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm
extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt
tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13
cdp_13 invpcid_single hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
vmmcall fsgsbase bmil avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassist pausefilter pfthreshold avic
v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
overflow_recov succor smca fsrm flush_lld
```

Virtualization:

L1d cache:	1 MiB (32 instances)
L1i cache:	1 MiB (32 instances)
L2 cache:	32 MiB (32 instances)
L3 cache:	512 MiB (16 instances)

NUMA node(s):

NUMA node0 CPU(s):	0-7
NUMA node1 CPU(s):	8-15
NUMA node2 CPU(s):	16-23
NUMA node3 CPU(s):	24-31

Vulnerability Itlb multihit:

Not affected

Vulnerability Lltf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1:

Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB

filling, PBRSB-eIBRS Not affected

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-7

node 0 size: 386767 MB

node 0 free: 386278 MB

node 1 cpus: 8-15

node 1 size: 387035 MB

node 1 free: 386736 MB

node 2 cpus: 16-23

node 2 size: 387069 MB

node 2 free: 386650 MB

node 3 cpus: 24-31

node 3 size: 387014 MB

node 3 free: 386481 MB

node distances:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 16-Core Processor)

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

Platform Notes (Continued)

```
node   0   1   2   3
 0:  10  12  32  32
 1:  12  10  32  32
 2:  32  32  10  12
 3:  32  32  12  10
```

```
-----  
9. /proc/meminfo  
MemTotal:      1585036372 kB
```

```
-----  
10. who -r  
run-level 3 Oct  7 14:54
```

```
-----  
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)  
Default Target  Status  
multi-user      running
```

```
-----  
12. Services, from systemctl list-unit-files  
STATE          UNIT FILES  
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator  
                kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd  
                systemd-pstore wickedd-wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
                firewalld gpm grub2-once haveged haveged-switch-root hwloc-dump-hwdata ipmi ipmievd  
                issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap  
                rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice  
                systemd-boot-check-no-failures systemd-network-generator systemd-sysext  
                systemd-time-wait-sync systemd-timesyncd udisks2  
indirect        wickedd
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=185bd913-afdf4-4bd7-b92d-ac5ed4a95cce  
splash=silent  
mitigations=auto  
quiet  
security=apparmor
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 1.50 GHz and 4.10 GHz.  
    The governor "performance" may decide which speed to use  
    within this range.  
    boost state support:  
        Supported: yes  
        Active: yes
```

```
-----  
15. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space      0  
vm.compaction_proactiveness   20  
vm.dirty_background_bytes      0
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 16-Core Processor)

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

Platform Notes (Continued)

```
vm.dirty_background_ratio      10
vm.dirty_bytes                0
vm.dirty_expire_centisecs    3000
vm.dirty_ratio                8
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold         500
vm.min_unmapped_ratio        1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages   0
vm.swappiness                 1
vm.watermark_boost_factor    15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1
```

```
16. /sys/kernel/mm/transparent_hugepage
    defrag      [always] defer defer+madvise madvise never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force
```

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan          4096
    scan_sleep_millisecs   10000
```

```
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP5
```

```
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdc2        xfs   892G  8.1G  884G   1%  /
```

```
20. /sys/devices/virtual/dmi/id
  Vendor:      Cisco Systems Inc
  Product:     UCSC-C245-M8SX
  Serial:      WZP2750Z162
```

```
21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
```

Memory:

```
12x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600, configured at 4800
 3x 0xCE00 M321R8GA0PB0-CWMJH 64 GB 2 rank 5600, configured at 4800
 9x 0xCE00 M321R8GA0PB0-CWMKJ 64 GB 2 rank 5600, configured at 4800
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 16-Core Processor)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

Test Date: Jul-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

Platform Notes (Continued)

```
-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Cisco Systems, Inc.  
BIOS Version: C245M8.4.3.4a.0.0520240849  
BIOS Date: 05/20/2024  
BIOS Revision: 5.27
```

Compiler Version Notes

```
=====| C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)  
=====| 657.xz_s(base, peak)
```

```
=====AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
```

```
=====| C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)  
=====| 641.leela_s(base, peak)
```

```
=====AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
```

```
=====| Fortran | 648.exchange2_s(base, peak)
```

```
=====AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 16-Core Processor)

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdaloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdaloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdaloc
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 16-Core Processor)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

Test Date: Jul-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -festo
-fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 16-Core Processor)

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

CPU2017 License: 9019

Test Date: Jul-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Jun-2023

Peak Optimization Flags (Continued)

602.gcc_s (continued):

```
-Wl,-allow-multiple-definition -z muldefs -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

605.mcf_s: Same as 600.perlbench_s

625.x264_s: Same as 600.perlbench_s

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdaloc-ext -lflang
```

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 16-Core Processor)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017_int_base = 16.6

SPECspeed®2017_int_peak = 16.8

Test Date: Jul-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-11 00:12:06-0400.

Report generated on 2024-08-01 13:33:37 by CPU2017 PDF formatter v6716.

Originally published on 2024-08-01.