



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation


## Supermicro

### Mainstream A+ Server AS -1015A-MT (H13SAE-MF , AMD EPYC 4344P)

SPECspeed®2017\_int\_base = 18.4  
 SPECspeed®2017\_int\_energy\_base = 301  
 SPECspeed®2017\_int\_peak = 19.2  
 SPECspeed®2017\_int\_energy\_peak = 310

CPU2017 License: 001176  
 Test Sponsor: Supermicro  
 Tested by: Supermicro

Test Date: Jul-2024  
 Hardware Availability: May-2024  
 Software Availability: Jun-2024

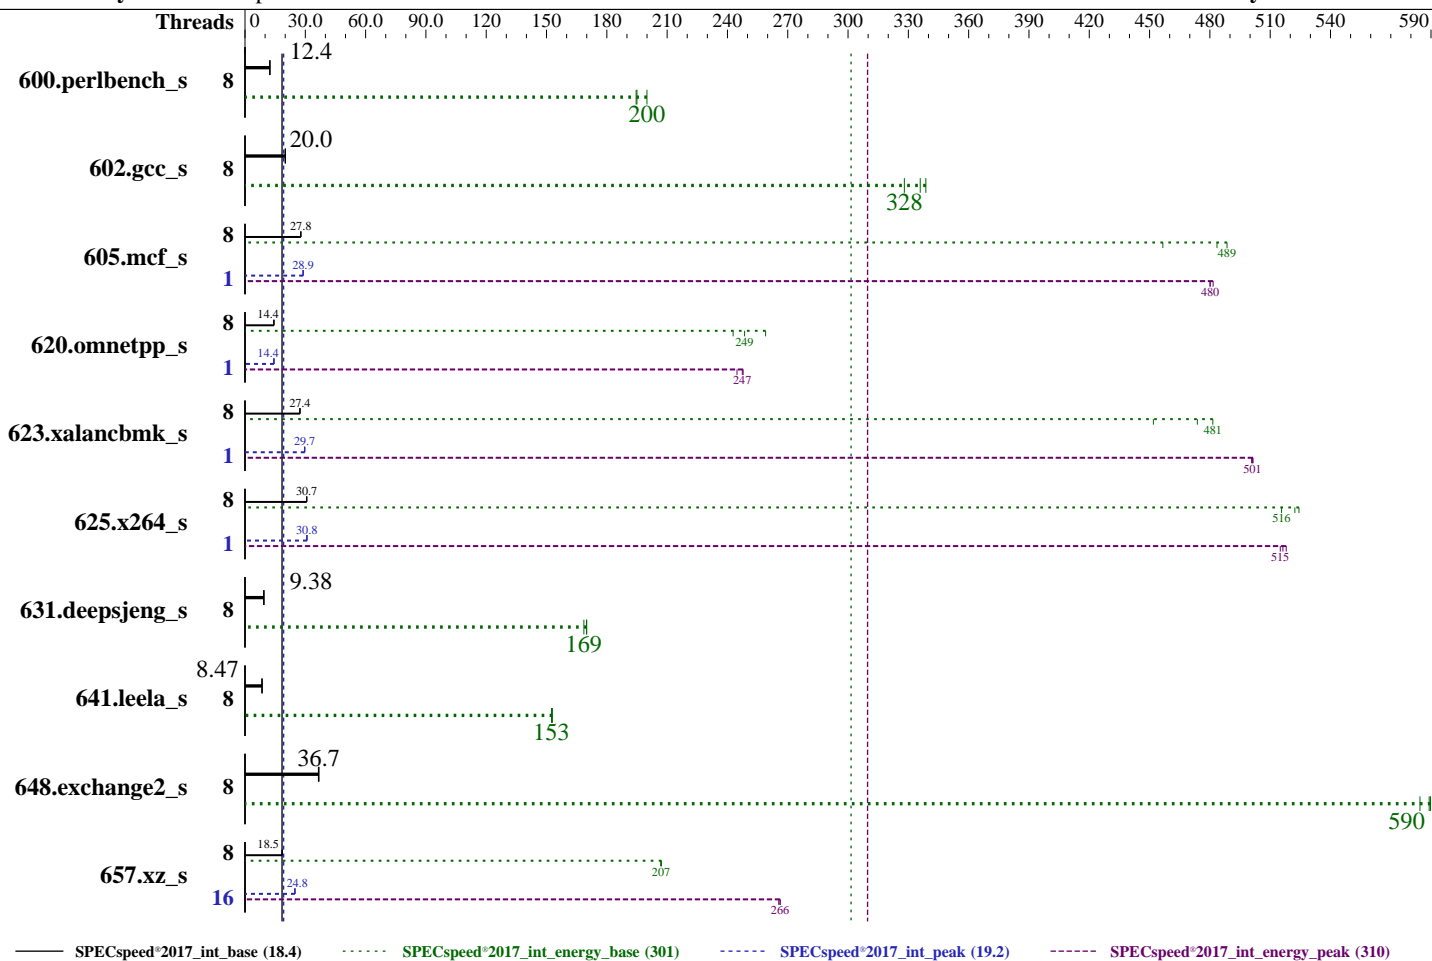

Hardware	Software
CPU Name: AMD EPYC 4344P	OS: Ubuntu 22.04.3 LTS
Max MHz: 5300	Kernel 6.5.0-44-generic
Nominal: 3800	Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
Enabled: 8 cores, 1 chip, 2 threads/core	Parallel: Yes
Orderable: 1 chip	Firmware: Version 1.2a released Feb-2024
Cache L1: 32 KB I + 32 KB D on chip per core	File System: ext4
L2: 1 MB I+D on chip per core	System State: Run level 5 (multi-user)
L3: 32 MB I+D on chip per chip	Base Pointers: 64-bit
Other: None	Peak Pointers: 64-bit
Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5200B-U)	Other: None
Storage: 1 x 500 GB NVMe SSD	Power Management: OS set to prefer performance at the cost of additional power usage.
Other: CPU Cooling: Air	



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

### Mainstream A+ Server AS -1015A-MT (H13SAE-MF , AMD EPYC 4344P)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_energy\_base = 301

SPECspeed®2017\_int\_peak = 19.2

SPECspeed®2017\_int\_energy\_peak = 310

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jul-2024  
Hardware Availability: May-2024  
Software Availability: Jun-2024

### Power

Max. Power (W): 135.81  
Idle Power (W): 39.86  
Min. Temperature (C): 29.88  
Elevation (m): 132  
Line Standard: 220 V / 50 Hz / 1 phase / 3 wires  
Provisioning: Line-powered

#### Power Settings

Management FW: Version 01.01.04 of Supermicro BMC Firmware  
Memory Mode: Normal

#### Power-Relevant Hardware

Power Supply: 1 x 500 W (non-redundant)  
Details: Supermicro PWS-505P-1H  
Backplane: 1 x 500 GB NVMe SSD back plane  
Other Storage: None  
Storage Model #: Samsung SSD 980 Pro 500 GB  
NICs Installed: 2 x Intel I210 Gigabit Ethernet Controller @ 1 Gb  
NICs Enabled (FW/OS): 2 / 1  
NICs Connected/Speed: 1 @ 1 Gb  
Other HW Model #: None

#### Power Analyzer

Power Analyzer: 10.216.139.174:8888  
Hardware Vendor: YOKOGAWA, Inc.  
Model: WT310E  
Serial Number: C2ZG04129V  
Input Connection: Ethernet  
Metrology Institute: NIST  
Calibration By: TESCOM  
Calibration Label: T119755  
Calibration Date: 16-May-2024  
PTDaemon® Version: 1.11.0 (a4047d62; 2023-12-05)  
Setup Description: Connected to PSU 1  
Current Ranges Used: 2A  
Voltage Range Used: 300V

#### Temperature Meter

Temperature Meter: 10.216.139.174:8889  
Hardware Vendor: iButtonLink, Inc.  
Model: LinkUSBi + T-Probe  
Serial Number: USB-SERIAL CH340  
Input Connection: USB  
PTDaemon Version: 1.11.0 (a4047d62; 2023-12-05)  
Setup Description: 50 mm in front of SUT main intake

## Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	8	<b>143</b>	<b>12.4</b>	<b>9.63</b>	<b>200</b>	<b>67.3</b>	<b>69.4</b>	144	12.3	9.90	195	68.6	69.6	143	12.4	9.88	195	69.0	69.7
602.gcc_s	8	198	20.1	12.8	339	64.5	68.3	<b>199</b>	<b>20.0</b>	<b>13.2</b>	<b>328</b>	<b>66.4</b>	<b>69.0</b>	199	20.0	12.9	336	64.8	68.7
605.mcf_s	8	170	27.8	10.7	484	62.7	71.2	170	27.7	11.3	457	66.3	69.1	<b>170</b>	<b>27.8</b>	<b>10.5</b>	<b>489</b>	<b>62.0</b>	<b>64.8</b>
620.omnetpp_s	8	<b>113</b>	<b>14.4</b>	<b>7.14</b>	<b>249</b>	<b>63.0</b>	<b>65.7</b>	113	14.4	6.85	259	60.4	61.4	113	14.4	7.31	243	64.4	65.9
623.xalanbmk_s	8	51.7	27.4	3.41	452	65.8	72.2	<b>51.8</b>	<b>27.4</b>	<b>3.20</b>	<b>481</b>	<b>61.7</b>	<b>67.8</b>	52.0	27.2	3.25	474	62.4	70.7
625.x264_s	8	57.6	30.6	3.66	524	63.6	67.3	<b>57.4</b>	<b>30.7</b>	<b>3.72</b>	<b>516</b>	<b>64.8</b>	<b>68.3</b>	57.4	30.7	3.67	522	64.0	67.3
631.deepsjeng_s	8	<b>153</b>	<b>9.38</b>	<b>9.24</b>	<b>169</b>	<b>60.5</b>	<b>62.0</b>	153	9.39	9.17	170	60.1	63.7	153	9.38	9.16	170	60.0	61.7
641.leela_s	8	201	8.47	12.1	153	60.0	60.8	201	8.47	12.1	153	60.1	60.9	<b>201</b>	<b>8.47</b>	<b>12.1</b>	<b>153</b>	<b>60.1</b>	<b>60.9</b>
648.exchange2_s	8	80.5	36.5	5.47	585	68.0	68.8	79.9	36.8	5.43	589	67.9	69.0	<b>80.2</b>	<b>36.7</b>	<b>5.42</b>	<b>590</b>	<b>67.6</b>	<b>68.5</b>
657.xz_s	8	335	18.4	32.5	207	97.1	132	<b>334</b>	<b>18.5</b>	<b>32.5</b>	<b>207</b>	<b>97.4</b>	<b>132</b>	334	18.5	32.5	207	97.4	133

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_energy\_base = 301

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

### Mainstream A+ Server AS -1015A-MT (H13SAE-MF , AMD EPYC 4344P)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_energy\_base = 301

SPECspeed®2017\_int\_peak = 19.2

SPECspeed®2017\_int\_energy\_peak = 310

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2024

Hardware Availability: May-2024

Software Availability: Jun-2024

## Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	8	<b>143</b>	<b>12.4</b>	<b>9.63</b>	<b>200</b>	<b>67.3</b>	<b>69.4</b>	144	12.3	9.90	195	68.6	69.6	143	12.4	9.88	195	69.0	69.7
602.gcc_s	8	198	20.1	12.8	339	64.5	68.3	<b>199</b>	<b>20.0</b>	<b>13.2</b>	<b>328</b>	<b>66.4</b>	<b>69.0</b>	199	20.0	12.9	336	64.8	68.7
605.mcf_s	1	163	28.9	10.7	480	65.7	69.2	<b>163</b>	<b>28.9</b>	<b>10.7</b>	<b>480</b>	<b>65.7</b>	<b>69.1</b>	163	28.9	10.7	482	65.5	69.9
620.omnetpp_s	1	114	14.3	7.25	245	63.4	64.8	<b>113</b>	<b>14.4</b>	<b>7.17</b>	<b>247</b>	<b>63.5</b>	<b>64.8</b>	113	14.4	7.16	248	63.4	64.8
623.xalanbmk_s	1	47.6	29.8	3.07	501	64.4	71.2	<b>47.7</b>	<b>29.7</b>	<b>3.07</b>	<b>501</b>	<b>64.4</b>	<b>71.0</b>	47.9	29.6	3.07	501	64.2	71.0
625.x264_s	1	<b>57.3</b>	<b>30.8</b>	<b>3.73</b>	<b>515</b>	<b>65.0</b>	<b>66.2</b>	<b>57.2</b>	30.8	3.72	516	65.0	66.6	57.4	30.8	3.71	518	64.6	65.9
631.deepsjeng_s	8	<b>153</b>	<b>9.38</b>	<b>9.24</b>	<b>169</b>	<b>60.5</b>	<b>62.0</b>	153	9.39	9.17	170	60.1	63.7	153	9.38	9.16	170	60.0	61.7
641.leela_s	8	201	8.47	12.1	153	60.0	60.8	201	8.47	12.1	153	60.1	60.9	<b>201</b>	<b>8.47</b>	<b>12.1</b>	<b>153</b>	<b>60.1</b>	<b>60.9</b>
648.exchange2_s	8	80.5	36.5	5.47	585	68.0	68.8	79.9	36.8	5.43	589	67.9	69.0	<b>80.2</b>	<b>36.7</b>	<b>5.42</b>	<b>590</b>	<b>67.6</b>	<b>68.5</b>
657.xz_s	16	249	24.9	25.3	266	102	136	249	24.8	25.4	266	102	136	<b>249</b>	<b>24.8</b>	<b>25.3</b>	<b>266</b>	<b>102</b>	<b>136</b>

SPECspeed®2017\_int\_peak = 19.2

SPECspeed®2017\_int\_energy\_peak = 310

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

### Mainstream A+ Server AS -1015A-MT (H13SAE-MF , AMD EPYC 4344P)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_energy\_base = 301

SPECspeed®2017\_int\_peak = 19.2

SPECspeed®2017\_int\_energy\_peak = 310

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jul-2024  
**Hardware Availability:** May-2024  
**Software Availability:** Jun-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-15"
LD_LIBRARY_PATH = "/home/amd/eceo/speccpu2017/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "16"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-15"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "8"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

```
Sysinfo program /home/amd/eceo/speccpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on amd-Super-Server Sun Jul 28 20:37:21 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

### Mainstream A+ Server AS -1015A-MT (H13SAE-MF , AMD EPYC 4344P)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_energy\_base = 301

SPECspeed®2017\_int\_peak = 19.2

SPECspeed®2017\_int\_energy\_peak = 310

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2024

Hardware Availability: May-2024

Software Availability: Jun-2024

## Platform Notes (Continued)

- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
-----
1. uname -a
Linux amd-Super-Server 6.5.0-44-generic #44~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Tue Jun 18 14:36:16 UTC 2
x86_64 x86_64 x86_64 GNU/Linux
```

```
-----
2. w
 20:37:21 up 2 min,  2 users,  load average: 0.15, 0.10, 0.04
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
amd       :1       :1            20:36   ?xdm?  15.93s 0.00s  /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
amd       pts/1   -             20:36   9.00s  0.79s  0.02s  sudo su
```

```
-----
3. Username
From environment variable $USER:  root
From the command 'logname':      amd
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            253413
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
-----
5. sysinfo process ancestry
/sbin/init splash
/lib/systemd/systemd --user
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

### Mainstream A+ Server AS -1015A-MT (H13SAE-MF , AMD EPYC 4344P)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_energy\_base = 301

SPECspeed®2017\_int\_peak = 19.2

SPECspeed®2017\_int\_energy\_peak = 310

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2024

Hardware Availability: May-2024

Software Availability: Jun-2024

## Platform Notes (Continued)

```

/usr/libexec/gnome-terminal-server
bash
sudo su
sudo su
su
bash
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --runmode speed
--tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/amd/eceo/speccpu2017

```

### 6. /proc/cpuinfo

```

model name      : AMD EPYC 4344P 8-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 25
model           : 97
stepping        : 2
microcode       : 0xa601206
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size        : 3584 4K pages
cpu cores       : 8
siblings        : 16
1 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-7
physical id 0: apicids 0-15

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         48 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:   0-15
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 4344P 8-Core Processor
CPU family:            25
Model:                 97
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):             1
Stepping:              2
CPU max MHz:           5389.0000
CPU min MHz:           400.0000
BogoMIPS:              7585.94
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

### Mainstream A+ Server AS -1015A-MT (H13SAE-MF , AMD EPYC 4344P)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_energy\_base = 301

SPECspeed®2017\_int\_peak = 19.2

SPECspeed®2017\_int\_energy\_peak = 310

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jul-2024  
Hardware Availability: May-2024  
Software Availability: Jun-2024

## Platform Notes (Continued)

```
lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2
movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced
vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
wbnoinvd cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload
vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid
overflow_recov succor smca flush_llid
```

```
Virtualization: AMD-V
L1d cache: 256 KiB (8 instances)
L1i cache: 256 KiB (8 instances)
L2 cache: 8 MiB (8 instances)
L3 cache: 32 MiB (1 instance)
NUMA node(s): 1
NUMA node0 CPU(s): 0-15
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

```
From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 32K 256K 8 Data 1 64 1 64
L1i 32K 256K 8 Instruction 1 64 1 64
L2 1M 8M 8 Unified 2 2048 1 64
L3 32M 32M 16 Unified 3 32768 1 64
```

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-15
node 0 size: 63428 MB
node 0 free: 61824 MB
node distances:
node 0
0: 10
```

```
9. /proc/meminfo
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

### Mainstream A+ Server AS -1015A-MT (H13SAE-MF , AMD EPYC 4344P)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_energy\_base = 301

SPECspeed®2017\_int\_peak = 19.2

SPECspeed®2017\_int\_energy\_peak = 310

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jul-2024  
**Hardware Availability:** May-2024  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

MemTotal: 64950980 kB

-----  
10. who -r  
run-level 5 Jul 28 20:35

-----  
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)  
Default Target Status  
graphical running

-----  
12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online  
accounts-daemon anacron apparmor avahi-daemon binfmt-support bluetooth console-setup cron  
cups cups-browsed dmesg e2scrub\_reap getty@ gpu-manager grub-common grub-initrd-fallback  
hv-fcopy-daemon hv-kvp-daemon hv-vss-daemon irqbalance kerneloops keyboard-setup  
networkd-dispatcher nvme-fc-boot-connections nvme-autoconnect openvpn power-profiles-daemon  
rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oomd systemd-pstore  
systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw  
unattended-upgrades wpa\_supplicant  
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs  
disabled acpid brltty console-getty debug-shell intel-sgx-load-module nftables openvpn-client@  
openvpn-server@ openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd  
systemd-boot-check-no-failures systemd-network-generator systemd-networkd  
systemd-networkd-wait-online systemd-sysextd systemd-time-wait-sync upower  
wpa\_supplicant-nl80211@ wpa\_supplicant-wired@ wpa\_supplicant@  
generated apport speech-dispatcher  
indirect saned@ spice-vdagentd uuid  
masked alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned  
screen-cleanup sudo x11-common

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.5.0-44-generic  
root=UUID=a6df9058-1d2e-4132-a213-1d96030e2b42  
ro  
quiet  
splash  
vt.handoff=7

-----  
14. cpupower frequency-info  
analyzing CPU 4:  
current policy: frequency should be within 400 MHz and 5.39 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 2  
Pstate-P0: 3800MHz

-----  
15. sysctl

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

### Mainstream A+ Server AS -1015A-MT (H13SAE-MF , AMD EPYC 4344P)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_energy\_base = 301

SPECspeed®2017\_int\_peak = 19.2

SPECspeed®2017\_int\_energy\_peak = 310

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2024

Hardware Availability: May-2024

Software Availability: Jun-2024

### Platform Notes (Continued)

```

kernel.numa_balancing          0
kernel.randomize_va_space     0
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.3 LTS

```

```

-----
19. Disk information
SPEC is set to: /home/amd/eceo/speccpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 ext4 457G 33G 402G 8% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: Super Server
Product Family: Family
Serial: 0123456789

```

```

-----
21. dmidecode

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

### Mainstream A+ Server AS -1015A-MT (H13SAE-MF , AMD EPYC 4344P)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_energy\_base = 301

SPECspeed®2017\_int\_peak = 19.2

SPECspeed®2017\_int\_energy\_peak = 310

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jul-2024  
**Hardware Availability:** May-2024  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x NO DIMM NO DIMM  
2x Unknown CT32G52C42U5.M16G1 32 GB 2 rank 5200

-----  
22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.2a  
BIOS Date: 02/15/2024  
BIOS Revision: 5.32

## Compiler Version Notes

-----  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
657.xz\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

-----  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
641.leela\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

-----  
Fortran | 648.exchange2\_s(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

## Base Compiler Invocation

C benchmarks:  
clang

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Mainstream A+ Server AS -1015A-MT  
(H13SAE-MF , AMD EPYC 4344P)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_energy\_base = 301

SPECspeed®2017\_int\_peak = 19.2

SPECspeed®2017\_int\_energy\_peak = 310

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2024

Hardware Availability: May-2024

Software Availability: Jun-2024

## Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Mainstream A+ Server AS -1015A-MT  
(H13SAE-MF , AMD EPYC 4344P)

SPECspeed®2017_int_base =	18.4
SPECspeed®2017_int_energy_base =	301
SPECspeed®2017_int_peak =	19.2
SPECspeed®2017_int_energy_peak =	310

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jul-2024  
**Hardware Availability:** May-2024  
**Software Availability:** Jun-2024

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Mainstream A+ Server AS -1015A-MT  
(H13SAE-MF , AMD EPYC 4344P)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_energy\_base = 301

SPECspeed®2017\_int\_peak = 19.2

SPECspeed®2017\_int\_energy\_peak = 310

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2024

Hardware Availability: May-2024

Software Availability: Jun-2024

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264\_s: Same as 605.mcf\_s

657.xz\_s: Same as 605.mcf\_s

C++ benchmarks:

620.omnetpp\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Mainstream A+ Server AS -1015A-MT  
(H13SAE-MF , AMD EPYC 4344P)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_energy\_base = 301

SPECspeed®2017\_int\_peak = 19.2

SPECspeed®2017\_int\_energy\_peak = 310

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2024

Hardware Availability: May-2024

Software Availability: Jun-2024

## Peak Optimization Flags (Continued)

623.xalancbmk\_s (continued):

-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-AM5-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-AM5-revA.xml>

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-28 23:37:21-0400.

Report generated on 2024-09-11 09:32:00 by CPU2017 PDF formatter v6716.

Originally published on 2024-09-10.