



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL145 Gen11

(2.30 GHz, AMD EPYC 8534P)

SPECspeed®2017\_fp\_base = 197

SPECspeed®2017\_fp\_peak = 198

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

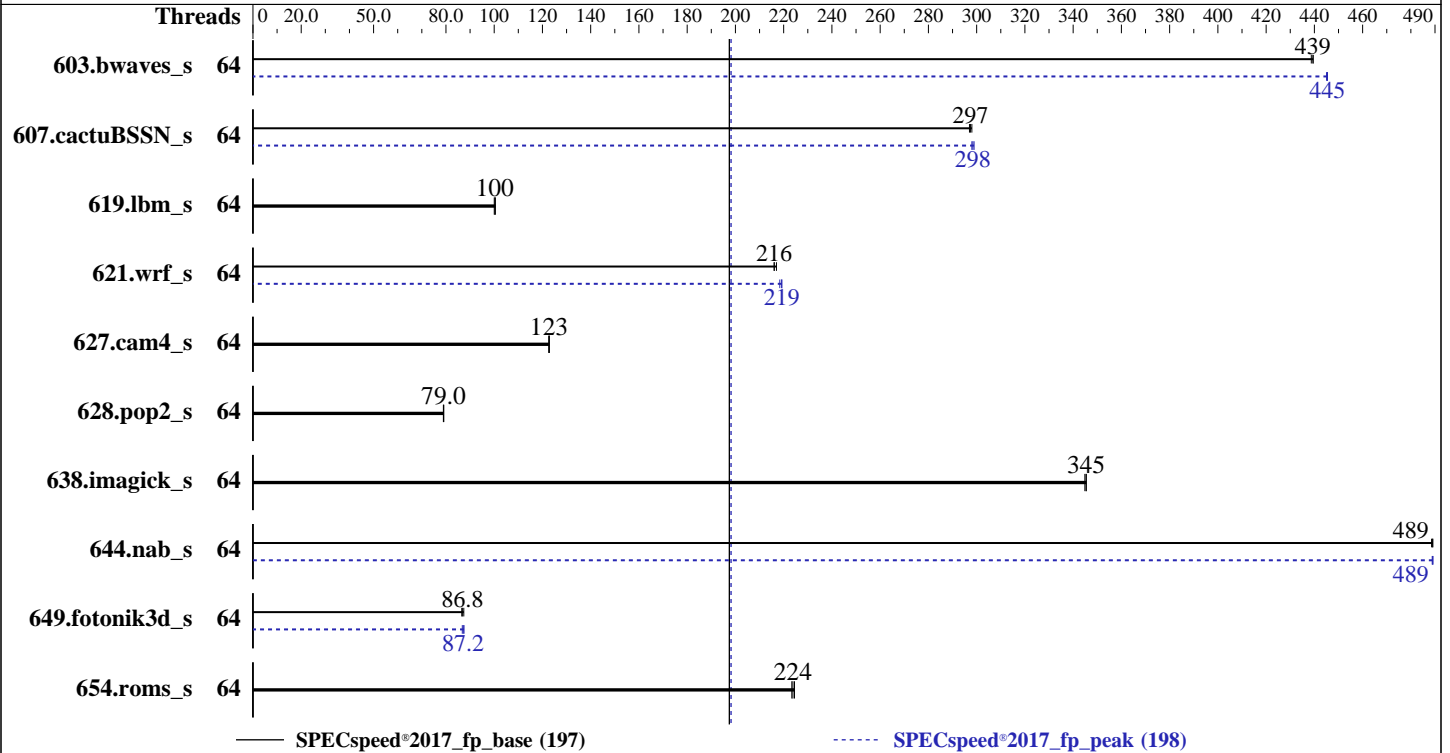

### Hardware

CPU Name: AMD EPYC 8534P  
 Max MHz: 3100  
 Nominal: 2300  
 Enabled: 64 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 128 MB I+D on chip per chip,  
 16 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (6 x 128 GB 4Rx4 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: Yes  
 Firmware: HPE BIOS Version v1.20 08/09/2024 released  
 Aug-2024  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at  
 the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.30 GHz, AMD EPYC 8534P)

SPECSpeed®2017\_fp\_base = 197

SPECSpeed®2017\_fp\_peak = 198

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Sep-2024  
Hardware Availability: Oct-2024  
Software Availability: Sep-2024

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	134	439	134	439	<b>134</b>	<b>439</b>	64	<b>132</b>	<b>445</b>	132	445	133	445
607.cactuBSSN_s	64	56.1	297	55.9	298	<b>56.0</b>	<b>297</b>	64	<b>55.9</b>	<b>298</b>	55.8	299	55.9	298
619.lbm_s	64	<b>52.2</b>	<b>100</b>	52.4	100	52.1	100	64	<b>52.2</b>	<b>100</b>	52.4	100	52.1	100
621.wrf_s	64	61.2	216	60.9	217	<b>61.2</b>	<b>216</b>	64	60.6	218	60.3	219	<b>60.3</b>	<b>219</b>
627.cam4_s	64	72.1	123	72.3	123	<b>72.2</b>	<b>123</b>	64	72.1	123	72.3	123	<b>72.2</b>	<b>123</b>
628.pop2_s	64	<b>150</b>	<b>79.0</b>	150	78.9	150	79.1	64	<b>150</b>	<b>79.0</b>	150	78.9	150	79.1
638.imagick_s	64	41.8	345	41.8	345	<b>41.8</b>	<b>345</b>	64	41.8	345	41.8	345	<b>41.8</b>	<b>345</b>
644.nab_s	64	35.8	489	35.7	489	<b>35.7</b>	<b>489</b>	64	35.7	489	<b>35.7</b>	<b>489</b>	35.7	489
649.fotonik3d_s	64	<b>105</b>	<b>86.8</b>	104	87.4	105	86.6	64	105	86.8	<b>105</b>	<b>87.2</b>	104	87.5
654.roms_s	64	<b>70.3</b>	<b>224</b>	70.5	223	70.1	224	64	<b>70.3</b>	<b>224</b>	70.5	223	70.1	224

SPECSpeed®2017\_fp\_base = **197**

SPECSpeed®2017\_fp\_peak = **198**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL145 Gen11**

(2.30 GHz, AMD EPYC 8534P)

**SPECSpeed®2017\_fp\_base = 197**

**SPECSpeed®2017\_fp\_peak = 198**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Sep-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Sep-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-63"

LD\_LIBRARY\_PATH =

"/home/cpu2k17/amd\_speed\_aocc500\_znver5\_A\_lib/lib:/home/cpu2k17/amd\_speed\_aocc500\_znver5\_A\_lib/lib32:"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "64"

Environment variables set by runcpu during the 603.bwaves\_s peak run:

GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 607.cactuBSSN\_s peak run:

GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 621.wrf\_s peak run:

GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 644.nab\_s peak run:

GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 649.fotonik3d\_s peak run:

GOMP\_CPU\_AFFINITY = "0-63"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

AMD SMT Option set to Disabled

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

AMD Periodic Directory Rinse Tuning set to Cache-Bound

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

L2 HW Prefetcher set to Disabled

The reference code/AGESA version used in this ROM is version Siena-PI 1.0.0

Sysinfo program /home/cpu2k17/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Sep 19 01:11:00 2024

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL145 Gen11**

(2.30 GHz, AMD EPYC 8534P)

**SPECspeed®2017\_fp\_base = 197**

**SPECspeed®2017\_fp\_peak = 198**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Sep-2024  
**Hardware Availability:** Oct-2024  
**Software Availability:** Sep-2024

## Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
01:11:00 up 8 min, 3 users, load average: 0.22, 0.09, 0.06
USER      TTY      FROM          LOGIN@      IDLE        JCPU       PCPU       WHAT
root      pts/0    172.17.1.13   01:09      11.00s     1.28s     0.06s     /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3093229
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3093229
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL145 Gen11**

**(2.30 GHz, AMD EPYC 8534P)**

**SPECspeed®2017\_fp\_base = 197**

**SPECspeed®2017\_fp\_peak = 198**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Sep-2024  
**Hardware Availability:** Oct-2024  
**Software Availability:** Sep-2024

## Platform Notes (Continued)

virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
python3 ./run_fpspeed.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.003/templogs/preenv.fpspeed.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2k17

```

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 8534P 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 2
microcode      : 0xaa00215
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size      : 3584 4K pages
cpu cores     : 64
siblings      : 64
1 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-63
physical id 0: apicids 0-63
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

### 7. lscpu

```

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:  0-63
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 8534P 64-Core Processor
BIOS Model name:      AMD EPYC 8534P 64-Core Processor
BIOS CPU family:      107
CPU family:           25
Model:                160
Thread(s) per core:   1
Core(s) per socket:   64
Socket(s):            1
Stepping:             2
BogoMIPS:              4593.18

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL145 Gen11**

(2.30 GHz, AMD EPYC 8534P)

**SPECspeed®2017\_fp\_base = 197**

**SPECspeed®2017\_fp\_peak = 198**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Sep-2024  
**Hardware Availability:** Oct-2024  
**Software Availability:** Sep-2024

## Platform Notes (Continued)

Flags:

```
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic
v_ymsave_ymload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
debug_swap
```

Virtualization:

```
AMD-V
L1d cache: 2 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 64 MiB (64 instances)
L3 cache: 128 MiB (8 instances)
```

```
NUMA node(s): 1
NUMA node0 CPU(s): 0-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	16M	128M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-63
node 0 size: 773332 MB
node 0 free: 772381 MB
node distances:
node 0
0: 10
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.30 GHz, AMD EPYC 8534P)

SPECspeed®2017\_fp\_base = 197

SPECspeed®2017\_fp\_peak = 198

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Sep-2024  
**Hardware Availability:** Oct-2024  
**Software Availability:** Sep-2024

## Platform Notes (Continued)

9. /proc/meminfo

MemTotal: 791892392 kB

10. who -r

run-level 3 Sep 19 01:04

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron getty@ irqbalance issue-generator kbdsettings postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=fe97c644-1alb-45c1-9618-5870ddb81128  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

14. cpupower frequency-info

analyzing CPU 39:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.30 GHz, AMD EPYC 8534P)

SPECspeed®2017\_fp\_base = 197

SPECspeed®2017\_fp\_peak = 198

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Sep-2024  
**Hardware Availability:** Oct-2024  
**Software Availability:** Sep-2024

## Platform Notes (Continued)

```
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2k17
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 btrfs 446G 66G 377G 15% /home
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: ProLiant DL145 Gen11
Product Family: ProLiant
Serial: 41600016J0A1
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
1x Hynix HMCT04MEERA129N 128 GB 4 rank 4800
5x Hynix HMCT04MEERA133N 128 GB 4 rank 4800
-----
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: HPE
BIOS Version: 1.20
BIOS Date: 08/09/2024
BIOS Revision: 1.20
Firmware Revision: 1.62
-----
```





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.30 GHz, AMD EPYC 8534P)

SPECspeed®2017\_fp\_base = 197

SPECspeed®2017\_fp\_peak = 198

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Sep-2024  
**Hardware Availability:** Oct-2024  
**Software Availability:** Sep-2024

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

## Base Compiler Invocation

C benchmarks:  
clang

Fortran benchmarks:  
flang

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.30 GHz, AMD EPYC 8534P)

SPECspeed®2017\_fp\_base = 197

SPECspeed®2017\_fp\_peak = 198

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC\_OPENMP -flto  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.30 GHz, AMD EPYC 8534P)

SPECspeed®2017\_fp\_base = 197

SPECspeed®2017\_fp\_peak = 198

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Sep-2024  
**Hardware Availability:** Oct-2024  
**Software Availability:** Sep-2024

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.30 GHz, AMD EPYC 8534P)

SPECspeed®2017\_fp\_base = 197

SPECspeed®2017\_fp\_peak = 198

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -mrecip=none  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP  
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math  
-fopenmp -fscalar-transform -fvector-transform  
-mllvm -reduce-array-computations=3 -Mrecursive  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.30 GHz, AMD EPYC 8534P)

SPECspeed®2017\_fp\_base = 197

SPECspeed®2017\_fp\_peak = 198

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Sep-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Sep-2024

## Peak Optimization Flags (Continued)

649.fotonik3d\_s (continued):

```
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm
-lamdalloc -lflang
```

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP
-fremap-arrays -fstrip-mining -fstruct-layout=9
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.30 GHz, AMD EPYC 8534P)

SPECspeed®2017\_fp\_base = 197

SPECspeed®2017\_fp\_peak = 198

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Sep-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Sep-2024

## Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Siena-rev1.0.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Siena-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-18 15:40:59-0400.

Report generated on 2024-10-09 14:02:54 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-09.