



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 908

H3C UniServer R4900 G7 (Intel Xeon 6746E)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066


Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

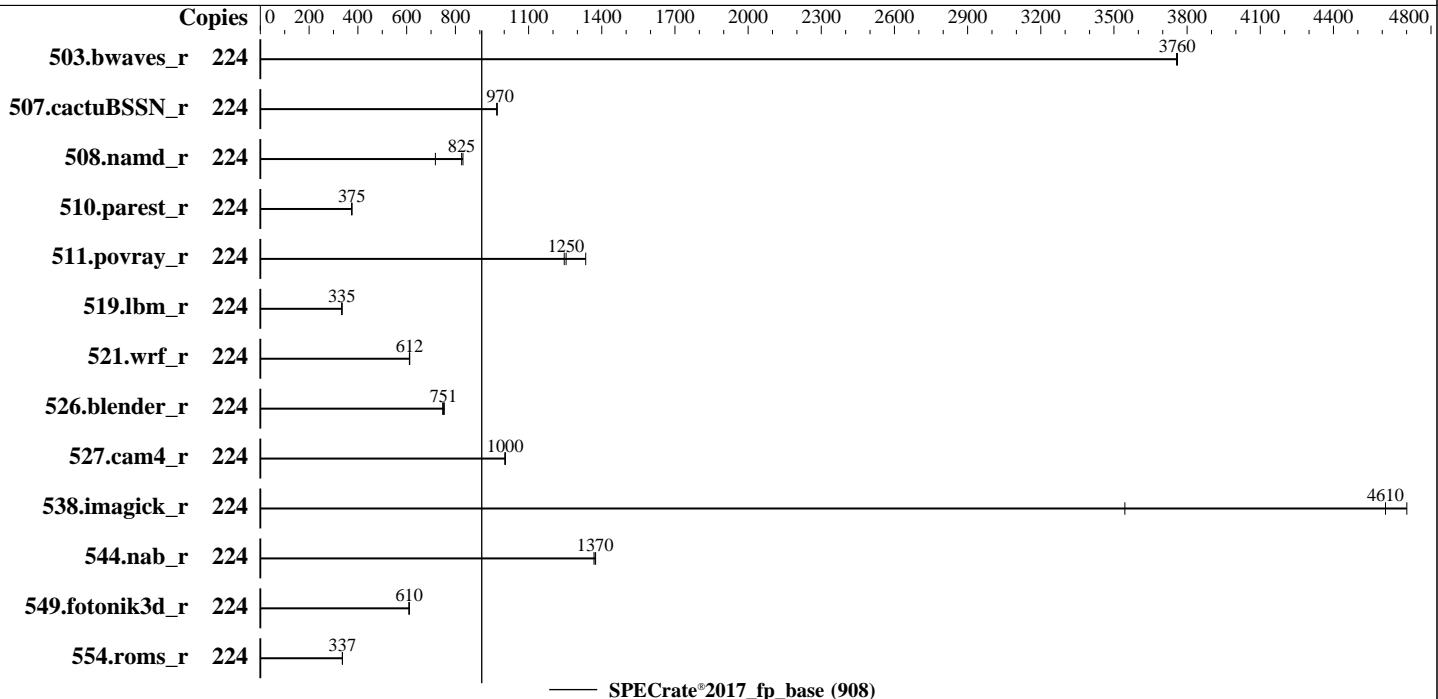

## Hardware

CPU Name: Intel Xeon 6746E  
 Max MHz: 2700  
 Nominal: 2000  
 Enabled: 224 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 4 MB I+D on chip per core  
 L3: 96 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R, running at 5600)  
 Storage: 1 x 6.4 TB NVME SSD  
 Other: CPU Cooling: Air

## Software

OS: Red Hat Enterprise Linux 9.4 (Plow)  
 Compiler: 5.14.0-427.13.1.el9\_4.x86\_64  
 C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 7.00.02 released Sep-2024 BIOS  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 908

H3C UniServer R4900 G7 (Intel Xeon 6746E)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	597	3760	598	3760	<b>597</b>	<b>3760</b>							
507.cactuBSSN_r	224	292	971	<b>292</b>	<b>970</b>	292	970							
508.namd_r	224	<b>258</b>	<b>825</b>	256	831	296	718							
510.parest_r	224	<b>1562</b>	<b>375</b>	1563	375	1562	375							
511.povray_r	224	420	1250	392	1330	<b>417</b>	<b>1250</b>							
519.lbm_r	224	<b>706</b>	<b>335</b>	706	335	706	334							
521.wrf_r	224	<b>820</b>	<b>612</b>	821	611	819	612							
526.blender_r	224	452	754	456	748	<b>454</b>	<b>751</b>							
527.cam4_r	224	390	1000	391	1000	<b>390</b>	<b>1000</b>							
538.imagick_r	224	119	4700	<b>121</b>	<b>4610</b>	157	3540							
544.nab_r	224	<b>275</b>	<b>1370</b>	276	1370	274	1370							
549.fotonik3d_r	224	<b>1431</b>	<b>610</b>	1430	611	1431	610							
554.roms_r	224	1057	337	<b>1057</b>	<b>337</b>	1058	337							

SPECrate®2017\_fp\_base = 908

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 908

H3C UniServer R4900 G7 (Intel Xeon 6746E)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

LLC dead line alloc = Disabled  
Power Performance Tuning = BIOS Controls EPPB  
ENERGY\_PERF\_BIAS\_CFG mode = Performance

Sysinfo program /home/speccpu/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Sun Sep 22 11:51:06 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 252 (252-32.el9\_4)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 

1. uname -a  
Linux localhost.localdomain 5.14.0-427.13.1.el9\_4.x86\_64 #1 SMP PREEMPT\_DYNAMIC Wed Apr 10 10:29:16 EDT 2024 x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
11:51:06 up 7:26, 1 user, load average: 0.00, 0.00, 0.00  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root pts/0 04:29 18.00s 1.47s 0.01s sh intrate.sh

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 908

H3C UniServer R4900 G7 (Intel Xeon 6746E)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Platform Notes (Continued)

```
3. Username
From environment variable $USER: root

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (i) 4124004
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4124004
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
sh intrate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 -c
  ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcores=112 --define
  physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 --configfile
  ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcores=112 --define
  physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base
  --output_format all --nopower --runmode rate --tune base --size refrate fprate --nopreenv --note-preenv
  --logfile $SPEC/tmp/CPU2017.006/templogs/preenv.fprate.006.0.log --lognum 006.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6746E
vendor_id       : GenuineIntel
cpu family     : 6
model          : 175
stepping        : 3
microcode       : 0x130000211
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 112
siblings         : 112
2 physical ids (chips)
224 processors (hardware threads)
physical id 0: core ids 0-111
physical id 1: core ids 0-111
physical id 0: apicids
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 908

## H3C UniServer R4900 G7 (Intel Xeon 6746E)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

### Platform Notes (Continued)

```
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222
physical id 1: apicids
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
6,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668
,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720
,722,724,726,728,730,732,734
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 48 bits virtual
Byte Order: Little Endian
CPU(s): 224
On-line CPU(s) list: 0-223
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6746E
BIOS Model name: Intel(R) Xeon(R) 6746E
CPU family: 6
Model: 175
Thread(s) per core: 1
Core(s) per socket: 112
Socket(s): 2
Stepping: 3
CPU(s) scaling MHz: 100%
CPU max MHz: 2700.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
xtopology nonstop_tsc cpuid aperf mperf tsc_known_freq pnpi pclmulqdq
dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
cdp_l13 cdp_l12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
erms invpcid cqmq rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni
xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
cqmq_mbm_local split_lock_detect avx_vnni lam wbnoinvd dtherm ida arat
pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi umip pku ospke
waitpkg gfn1 vaes vpclmulqdq tme rdpid bus_lock_detect cldemote movdiri
movdir64b enqcmd fsrm md_clear serialize pconfig arch_lbr ibt flush_lll
arch_capabilities
Virtualization: VT-x
L1d cache: 7 MiB (224 instances)
L1i cache: 14 MiB (224 instances)
L2 cache: 224 MiB (56 instances)
L3 cache: 192 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-111
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 908

H3C UniServer R4900 G7 (Intel Xeon 6746E)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Platform Notes (Continued)

```
NUMA node1 CPU(s): 112-223
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
                           PBRSB-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	7M	8	Data	1	64	1	64
L1i	64K	14M	8	Instruction	1	128	1	64
L2	4M	224M	16	Unified	2	4096	1	64
L3	96M	192M	12	Unified	3	131072	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-111
node 0 size: 515052 MB
node 0 free: 490500 MB
node 1 cpus: 112-223
node 1 size: 516012 MB
node 1 free: 493784 MB
node distances:
node 0 1
  0: 10 21
  1: 21 10
```

-----  
9. /proc/meminfo

```
MemTotal: 1055810436 kB
```

-----  
10. who -r

```
run-level 3 Sep 22 04:25
```

-----  
11. Systemd service manager version: systemd 252 (252-32.el9\_4)

```
Default Target Status
multi-user running
```

-----  
12. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
               accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
               gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt
               lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd
               nis-domainname nvmefc-boot-connections ostree-remount pmcd pmie pmlogger
               power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 908

H3C UniServer R4900 G7 (Intel Xeon 6746E)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Platform Notes (Continued)

selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-boot-update  
systemd-network-generator tuned udisks2 upower vgaauthd virtqemud vmtoolsd  
  
enabled-runtime  
disabled  
systemd-remount-fs  
arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown  
canberra-system-shutdown-reboot chrony-wait chronyd-restricted cni-dhcp console-getty  
cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq dovecot  
fancontrol fcoe grafana-server gssproxy httpd httpd@ ibacm iprdump iprinit ipruleupdate ipsec  
iscsi-init iscsid iscsiuiio kpatch kvm\_stat ledmon libvirt-guests libvirtd llpad  
man-db-restart-cache-update named named-chroot netavark-dhcp-proxy  
netavark-firewalld-reload nfs-blkmap nfs-server nftables nmb numad nvme-autoconnect  
ostree-readonly-sysroot-migration ostree-state-overlay@ pesign pmfind pmie\_farm  
pmlogger\_farm pmproxy podman podman-auto-update podman-clean-transient podman-kube@  
podman-restart postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts  
rpmdb-rebuild rrdcached saslauthd selinux-check-proper-disable serial-getty@ smb snmpd  
snmptrapd spamassassin speech-dispatcherd srp\_daemon srp\_daemon\_port@ sshd-keygen@  
systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysext target  
targetclid tog-pegasus trace-cmd virtinterfaced virtlockd virtlogd virtnetworkd  
virtnodeudev virtnwfilterd virtproxyd virtsecretd virtstoraged vsftpd wpa\_supplicant  
indirect  
iscsi pcscd spice-vdagentd sssd-automount sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh  
sssd-sudo systemd-sysupdate systemd-sysupdate-reboot vsftpd@

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-427.13.1.el9\_4.x86\_64  
root=/dev/mapper/rhel-root  
ro  
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap  
rhgb  
quiet

-----  
14. cpupower frequency-info  
analyzing CPU 23:  
current policy: frequency should be within 800 MHz and 2.70 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

-----  
15. tuned-adm active  
Current active profile: throughput-performance

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 40  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 908

H3C UniServer R4900 G7 (Intel Xeon 6746E)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Platform Notes (Continued)

```
vm.min_unmapped_ratio      1
vm.nr_hugepages           0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              10
vm.watermark_boost_factor  15000
vm.watermark_scale_factor   10
vm.zone_reclaim_mode       0
```

```
-----17. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvise [madvise] never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

```
-----18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs    60000
defrag                  1
max_ptes_none            511
max_ptes_shared          256
max_ptes_swap            64
pages_to_scan            4096
scan_sleep_millisecs    10000
```

```
-----19. OS release
From /etc/*-release /etc/*-version
os-release   Red Hat Enterprise Linux 9.4 (Plow)
redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
system-release Red Hat Enterprise Linux release 9.4 (Plow)
```

```
-----20. Disk information
SPEC is set to: /home/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  3.5T  118G  3.4T   4% /home
```

```
-----21. /sys/devices/virtual/dmi/id
Vendor:      New H3C Technologies Co., Ltd.
Product:     H3C UniServer R4900 G7
Serial:      210235A51GH249000023
```

```
-----22. dmidecode
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Hynix HMCG94AHBRA480N 64 GB 2 rank 6400, configured at 5600
```

```
-----23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 7.00.02
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 908

H3C UniServer R4900 G7 (Intel Xeon 6746E)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Platform Notes (Continued)

BIOS Date: 09/14/2024

BIOS Revision: 5.35

Firmware Revision: 1.16

## Compiler Version Notes

=====

C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd\_r(base) 510.parest\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 507.cactuBSSN\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 908

H3C UniServer R4900 G7 (Intel Xeon 6746E)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 908

H3C UniServer R4900 G7 (Intel Xeon 6746E)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.0-SPR-RevE.html](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.0-SPR-RevE.xml](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-22 11:51:05-0400.

Report generated on 2024-10-09 14:04:04 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-09.