



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

CPU2017 License: 6488


Test Date: Sep-2024

Test Sponsor: xFusion

Hardware Availability: Nov-2023

Tested by: xFusion

Software Availability: Dec-2023

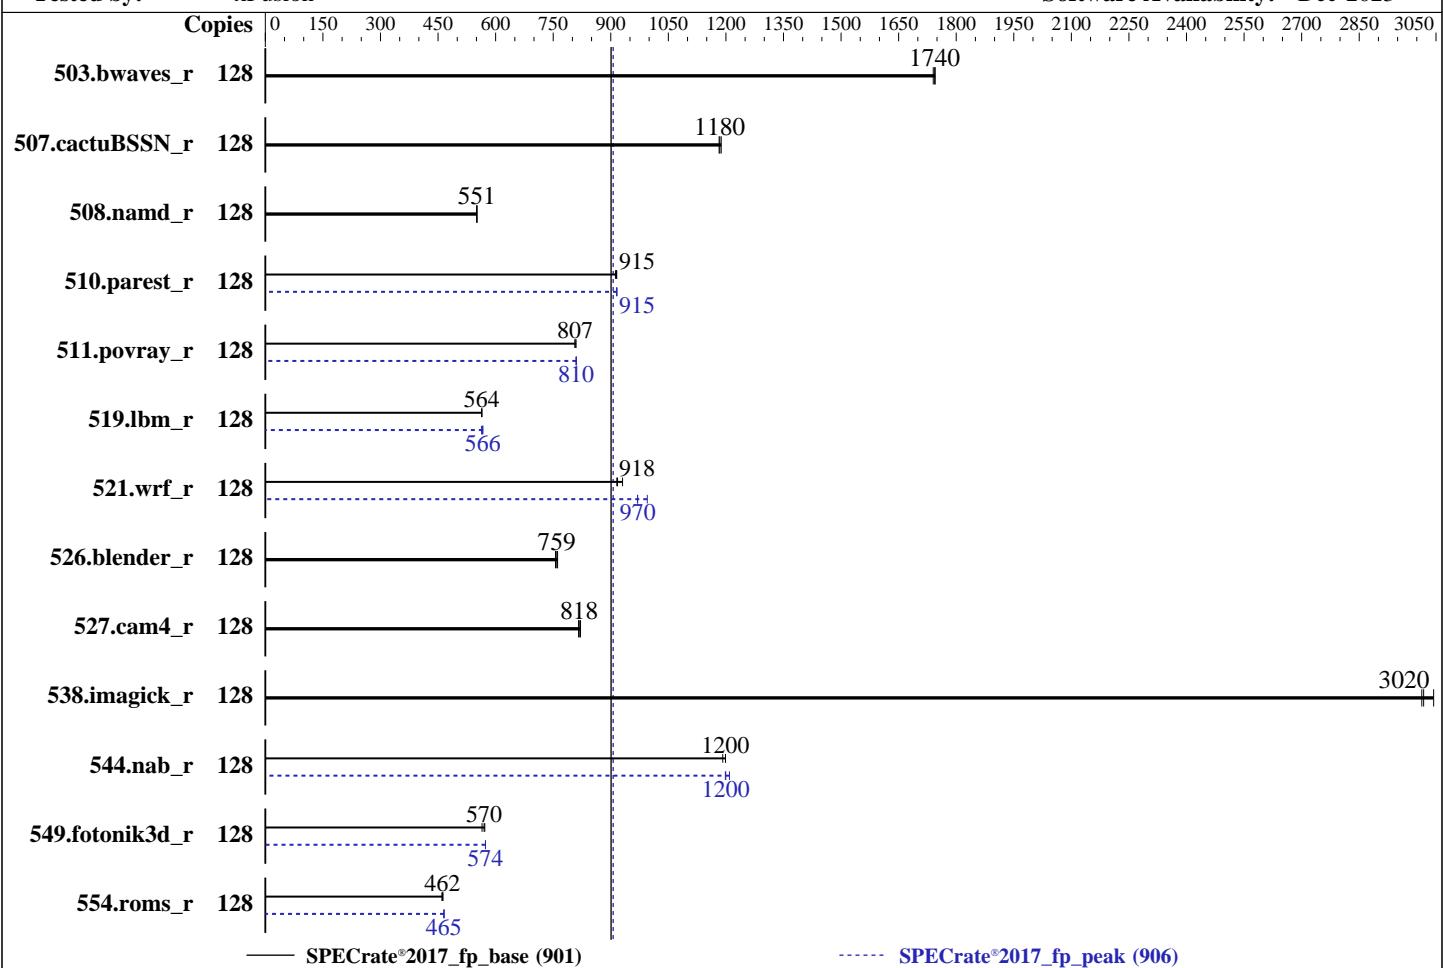

Hardware

CPU Name: AMD EPYC 9354
 Max MHz: 3800
 Nominal: 3250
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Version 2.09.26 released Aug-2024
 File System: xfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

CPU2017 License: 6488

Test Date: Sep-2024

Test Sponsor: xFusion

Hardware Availability: Nov-2023

Tested by: xFusion

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	738	1740	736	1740	735	1750	128	738	1740	736	1740	735	1750
507.cactusBSSN_r	128	137	1180	137	1180	136	1190	128	137	1180	137	1180	136	1190
508.namd_r	128	221	551	221	551	221	551	128	221	551	221	551	221	551
510.parest_r	128	367	912	366	915	366	915	128	366	915	366	915	365	916
511.povray_r	128	369	810	370	807	370	807	128	369	809	369	810	369	810
519.lbm_r	128	239	564	239	564	239	564	128	238	566	239	563	238	567
521.wrf_r	128	313	916	308	931	312	918	128	296	970	296	970	288	995
526.blender_r	128	256	761	257	759	258	756	128	256	761	257	759	258	756
527.cam4_r	128	274	818	273	821	274	816	128	274	818	273	821	274	816
538.imagick_r	128	105	3040	105	3020	106	3010	128	105	3040	105	3020	106	3010
544.nab_r	128	181	1190	180	1200	180	1200	128	178	1210	180	1200	180	1200
549.fotonik3d_r	128	875	570	883	565	872	572	128	870	574	870	574	870	574
554.roms_r	128	439	463	440	462	442	460	128	437	465	437	466	437	465

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/cpu2017/amd_rate_aocc400_znver4_A_lib/lib:/cpu2017/amd_rate_aocc400_znver4_A_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:
Determinism Control = Manual
Determinism Enable = Power
TDP Control = Manual
TDP = 400
PPT Control = Manual
PPT = 400
NUMA Nodes Per Socket = NPS4

```
Sysinfo program /cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Mon Sep 23 11:42:01 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 250 (250-6.el9_0)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

CPU2017 License: 6488

Test Date: Sep-2024

Test Sponsor: xFusion

Hardware Availability: Nov-2023

Tested by: xFusion

Software Availability: Dec-2023

Platform Notes (Continued)

14. cpupower frequency-info

15. tuned-adm active

16. sysctl

17. /sys/kernel/mm/transparent_hugepage

18. /sys/kernel/mm/transparent_hugepage/khugepaged

19. OS release

20. Disk information

21. /sys/devices/virtual/dmi/id

22. dmidecode

23. BIOS

1. uname -a

```
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64  
x86_64 x86_64 GNU/Linux
```

2. w

```
11:42:01 up 3:47, 3 users, load average: 3.64, 62.03, 99.56  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root pts/0 10:21 1:19m 0.02s 0.02s -bash  
root pts/1 10:48 53:09 0.01s 0.01s -bash  
root pts/2 11:28 9.00s 1.05s 0.00s tail -100f nohup.out
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 6191057  
max locked memory (kbytes, -l) 2097152  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 6191057  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root [priv]  
sshd: root@pts/2  
-bash  
python3 ./run_amd_rate_aocc400_znver4_A1.py  
/bin/bash ./amd_rate_aocc400_znver4_A1.sh  
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fprate  
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.020/templogs/preenv.fprate.020.0.log --lognum 020.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /cpu2017

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9354 32-Core Processor
vendor_id        : AuthenticAMD
cpu family       : 25
model            : 17
stepping          : 1
microcode         : 0xa101148
bugs              : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size          : 3584 4K pages
cpu cores         : 32
siblings          : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 1: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1: apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 128
On-line CPU(s) list:    0-127
Vendor ID:               AuthenticAMD
BIOS Vendor ID:         Advanced Micro Devices, Inc.
Model name:              AMD EPYC 9354 32-Core Processor
BIOS Model name:         AMD EPYC 9354 32-Core Processor
CPU family:              25
Model:                  17
Thread(s) per core:     2
Core(s) per socket:      32
Socket(s):              2
Stepping:                1
Frequency boost:         enabled
CPU max MHz:             3799.0720
CPU min MHz:             1500.0000
BogoMIPS:                6489.79
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                           clflush mmfx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                           constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl
                           pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                           popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                           abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                           perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13
                           invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                           avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
                           avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```
xsavc xgetbvl xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pkv ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
```

Virtualization:

L1d cache:	2 MiB (64 instances)
L1i cache:	2 MiB (64 instances)
L2 cache:	64 MiB (64 instances)
L3 cache:	512 MiB (16 instances)

NUMA node(s):

NUMA node0 CPU(s):	0-7,64-71
NUMA node1 CPU(s):	8-15,72-79
NUMA node2 CPU(s):	16-23,80-87
NUMA node3 CPU(s):	24-31,88-95
NUMA node4 CPU(s):	32-39,96-103
NUMA node5 CPU(s):	40-47,104-111
NUMA node6 CPU(s):	48-55,112-119
NUMA node7 CPU(s):	56-63,120-127

Vulnerability Itlb multihit:

Not affected

Vulnerability Llrf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-7,64-71

node 0 size: 95928 MB

node 0 free: 94652 MB

node 1 cpus: 8-15,72-79

node 1 size: 96764 MB

node 1 free: 96031 MB

node 2 cpus: 16-23,80-87

node 2 size: 96764 MB

node 2 free: 95979 MB

node 3 cpus: 24-31,88-95

node 3 size: 96764 MB

node 3 free: 96036 MB

node 4 cpus: 32-39,96-103

node 4 size: 96764 MB

node 4 free: 96051 MB

node 5 cpus: 40-47,104-111

node 5 size: 96728 MB

node 5 free: 96008 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

CPU2017 License: 6488

Test Date: Sep-2024

Test Sponsor: xFusion

Hardware Availability: Nov-2023

Tested by: xFusion

Software Availability: Dec-2023

Platform Notes (Continued)

```
node 6 cpus: 48-55,112-119
node 6 size: 96764 MB
node 6 free: 96036 MB
node 7 cpus: 56-63,120-127
node 7 size: 96711 MB
node 7 free: 95951 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 12 12 12 32 32 32 32
 1: 12 10 12 12 32 32 32 32
 2: 12 12 10 12 32 32 32 32
 3: 12 12 12 10 32 32 32 32
 4: 32 32 32 32 10 12 12 12
 5: 32 32 32 32 12 10 12 12
 6: 32 32 32 32 12 12 10 12
 7: 32 32 32 32 12 12 12 10

-----
9. /proc/meminfo
MemTotal: 791747024 kB

-----
10. who -r
run-level 5 Sep 23 07:54

-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
graphical running

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
systemd-network-generator tuned udisks2 upower vgaauthd vmtoolsd
enabled-runtime systemd-remount-fs
disabled arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnsmasq hwloc-dump-hwdata iprdump iprinit ipruleupdate iscsid
iscsiui0 kpatch kvm_stat ledmon man-db-restart-cache-update nftables nvmf-autoconnect
podman podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm
rhsm-facts rpmdb-rebuild serial-getty@ speech-dispatcherd sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext wpa_supplicant
indirect spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```
quiet
nohz_full=1-127

-----
14. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 3.25 GHz.
                The governor "performance" may decide which speed to use
                within this range.

    boost state support:
        Supported: yes
        Active: yes
        Boost States: 0
        Total States: 3
        Pstate-P0: 3250MHz

-----
15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1

-----
17. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag             1
max_ptes_none      511
max_ptes_shared    256
max_ptes_swap      64
pages_to_scan      4096
scan_sleep_millisecs 10000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

Platform Notes (Continued)

19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

20. Disk information
SPEC is set to: /cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs 70G 11G 60G 15% /

21. /sys/devices/virtual/dmi/id
Product: 1258H V7
Product Family: Genoa

22. dmidecode
Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
24x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: INSYDE Corp.
BIOS Version: 2.09.26
BIOS Date: 08/15/2024
BIOS Revision: 2.9

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aoxx-compiler-4.0.0/bin
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aoxx-compiler-4.0.0/bin
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++, C, Fortran | 507.cactusBSSN_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -fno -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using both C and C++:

```
clang++ clang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc
```

```
538.imagick_r: basepeak = yes
```

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc
```

C++ benchmarks:

```
508.namd_r: basepeak = yes
```

```
510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

```
549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -lflang
```

```
554.roms_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9354)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_fp_base = 901

SPECrate®2017_fp_peak = 906

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-23 11:42:01-0400.

Report generated on 2024-10-09 14:05:36 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-09.