



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation


ZTE R5300G5 Server System  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECrate®2017\_int\_base = 203

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9061  
Test Sponsor: ZTE Corporation  
Tested by: ZTE Corporation

Test Date: Oct-2024  
Hardware Availability: Feb-2024  
Software Availability: Mar-2024

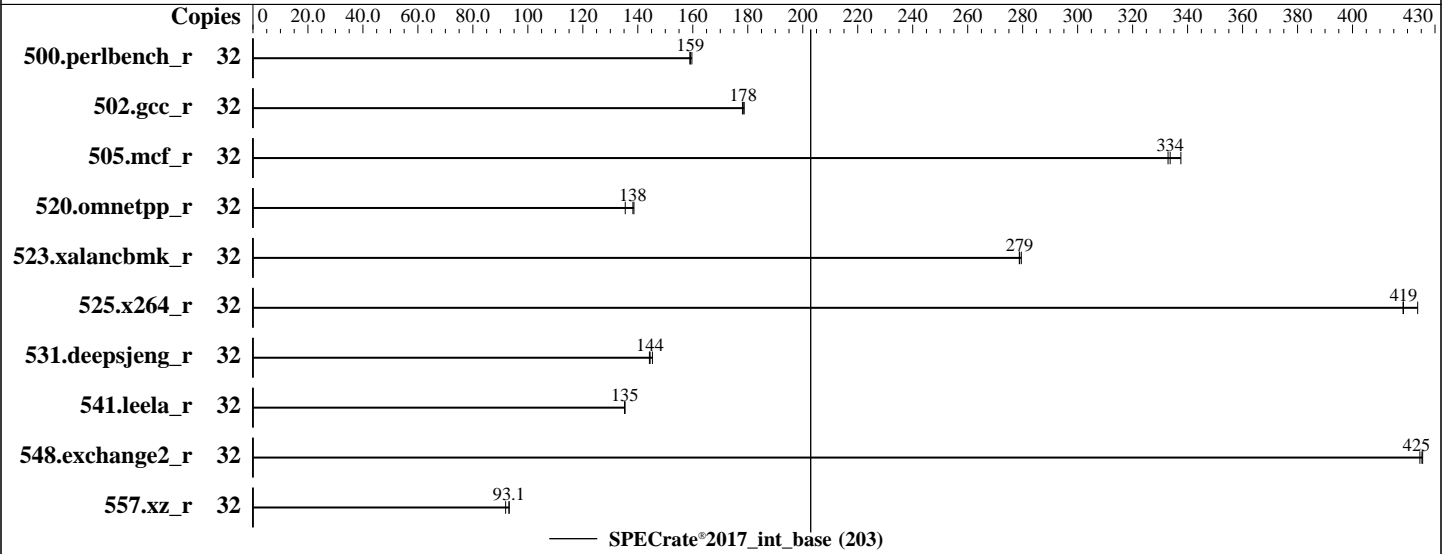

### Hardware

CPU Name: Intel Xeon Gold 6544Y  
 Max MHz: 4100  
 Nominal: 3600  
 Enabled: 16 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 45 MB I+D on chip per chip  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC5-5600B-R, running at 5200)  
 Storage: 1 x 480 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.2 (Plow)  
 5.14.0-284.11.1.el9\_2.x86\_64  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 04.24.04.00 released Oct-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECrate®2017\_int\_base = 203

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9061  
Test Sponsor: ZTE Corporation  
Tested by: ZTE Corporation

Test Date: Oct-2024  
Hardware Availability: Feb-2024  
Software Availability: Mar-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	321	159	319	160	<b><u>320</u></b>	<b><u>159</u></b>							
502.gcc_r	32	254	179	<b><u>254</u></b>	<b><u>178</u></b>	254	178							
505.mcf_r	32	153	338	155	333	<b><u>155</u></b>	<b><u>334</u></b>							
520.omnetpp_r	32	303	139	310	135	<b><u>304</u></b>	<b><u>138</u></b>							
523.xalancbmk_r	32	121	280	<b><u>121</u></b>	<b><u>279</u></b>	121	279							
525.x264_r	32	134	418	<b><u>134</u></b>	<b><u>419</u></b>	132	424							
531.deepsjeng_r	32	254	144	<b><u>254</u></b>	<b><u>144</u></b>	252	145							
541.leela_r	32	<b><u>392</u></b>	<b><u>135</u></b>	392	135	392	135							
548.exchange2_r	32	197	426	<b><u>197</u></b>	<b><u>425</u></b>	198	425							
557.xz_r	32	371	93.2	376	91.9	<b><u>371</u></b>	<b><u>93.1</u></b>							

SPECrate®2017\_int\_base = 203

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/spec/lib/intel64:/home/spec/lib/ia32:/home/spec/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECrate®2017\_int\_base = 203

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Oct-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Mar-2024

## Platform Notes

BIOS Configuration:  
ENERGY\_PERF\_BIAS\_CFG mode = performance  
LLC dead line alloc = Disabled  
Patrol Scrub = Disabled  
Sub NUMA(SNC) = Enable SNC2

Sysinfo program /home/spec/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Thu Oct 31 06:50:26 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.el9\_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.el9_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
06:50:26 up 32 min, 4 users, load average: 0.06, 0.03, 0.00
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root     pts/0    06:49   10.00s  0.71s  0.00s  /bin/sh
./reportable-ic2024.1-lin-sapphirerapids-rate-smt-on-20240308.sh
root     pts/1    06:49    2.00s  0.00s  0.00s  -bash
root     pts/2    06:49   60.00s  0.00s  0.00s  -bash
root     pts/3    06:49   59.00s  0.00s  0.00s  -bash
```

```
3. Username
From environment variable $USER:  root
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECrate®2017\_int\_base = 203

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Oct-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

```

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 1028233
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 1028233
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
/bin/sh ./reportable-ic2024.1-lin-sapphirerapids-rate-smt-on-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=16 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=16 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.intrate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/spec

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) GOLD 6544Y
vendor_id      : GenuineIntel
cpu family      : 6
model           : 207
stepping        : 2
microcode       : 0x21000283
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores       : 16
siblings        : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 0: apicids 0-31
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu
From lscpu from util-linux 2.37.4:

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECrate®2017\_int\_base = 203

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Oct-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                46 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       32
On-line CPU(s) list:         0-31
Vendor ID:                    GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   INTEL(R) XEON(R) GOLD 6544Y
BIOS Model name:             INTEL(R) XEON(R) GOLD 6544Y
CPU family:                   6
Model:                        207
Thread(s) per core:          2
Core(s) per socket:          16
Socket(s):                    1
Stepping:                     2
CPU max MHz:                  4100.0000
CPU min MHz:                  800.0000
BogoMIPS:                     7200.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1
                                avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                                hwp_act_window hwp_epp hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg
                                avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                                avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                                avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities

L1d cache:                    768 KiB (16 instances)
L1i cache:                    512 KiB (16 instances)
L2 cache:                     32 MiB (16 instances)
L3 cache:                     45 MiB (1 instance)
NUMA node(s):                 2
NUMA node0 CPU(s):           0-7,16-23
NUMA node1 CPU(s):           8-15,24-31
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:       Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:      Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:      Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW
                                sequence
Vulnerability Srbds:           Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECrate®2017\_int\_base = 203

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Oct-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

L2	2M	32M	16 Unified	2	2048	1	64
L3	45M	45M	15 Unified	3	49152	1	64

#### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-7,16-23
node 0 size: 128084 MB
node 0 free: 127480 MB
node 1 cpus: 8-15,24-31
node 1 size: 129015 MB
node 1 free: 128468 MB
node distances:
node  0  1
  0: 10 12
  1: 12 10

```

#### 9. /proc/meminfo

MemTotal: 263270508 kB

#### 10. who -r

run-level 3 Oct 31 06:18

#### 11. Systemd service manager version: systemd 252 (252-13.el9\_2)

Default Target	Status
multi-user	degraded

#### 12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* dnf-makecache.service	loaded	failed	failed	dnf makecache

#### 13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker getty@ insights-client-boot lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator udisks2
enabled-runtime	systemd-remount-fs
disabled	blk-availability chrony-wait console-getty cpupower debug-shell dnf-system-upgrade firewalld irqbalance kdump kvm_stat man-db-restart-cache-update nftables rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rsyslog selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

#### 14. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECrate®2017\_int\_base = 203

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Oct-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

nohz\_full=0-31

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.2 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.2 (Plow)
system-release  Red Hat Enterprise Linux release 9.2 (Plow)

```

20. Disk information

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G5 Server System  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECrate®2017\_int\_base = 203

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Oct-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

SPEC is set to: /home/spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	372G	21G	351G	6%	/home

```

21. /sys/devices/virtual/dmi/id
Vendor:      ZTE
Product:     R5300 G5
Product Family: Server
Serial:      219440501031

```

```

22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  8x Hynix HMC88AGBRA190N 32 GB 2 rank 5600, configured at 5200

```

```

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends Inc.
BIOS Version:     04.24.04.00
BIOS Date:        10/28/2024
BIOS Revision:    4.24

```

### Compiler Version Notes

```

=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

```

```

=====
C++       | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran   | 548.exchange2_r(base)
=====

```

```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

```

### Base Compiler Invocation

C benchmarks:  
icx

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ZTE Corporation**

ZTE R5300G5 Server System  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECrate®2017\_int\_base = 203

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Oct-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Mar-2024

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ZTE Corporation**

ZTE R5300G5 Server System  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECrate®2017\_int\_base = 203

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061

**Test Sponsor:** ZTE Corporation

**Tested by:** ZTE Corporation

**Test Date:** Oct-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Mar-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-EMR-V1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-EMR-V1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-31 06:50:26-0400.

Report generated on 2024-11-20 11:03:25 by CPU2017 PDF formatter v6716.

Originally published on 2024-11-19.